



I2C Transaction Screenshots

- 1) I2C Read Transaction, with Write happening before Restart to change pointer register
Reading from Temperature Register – Address 00h
1Dh and 70h are temperatures captured by the sensor

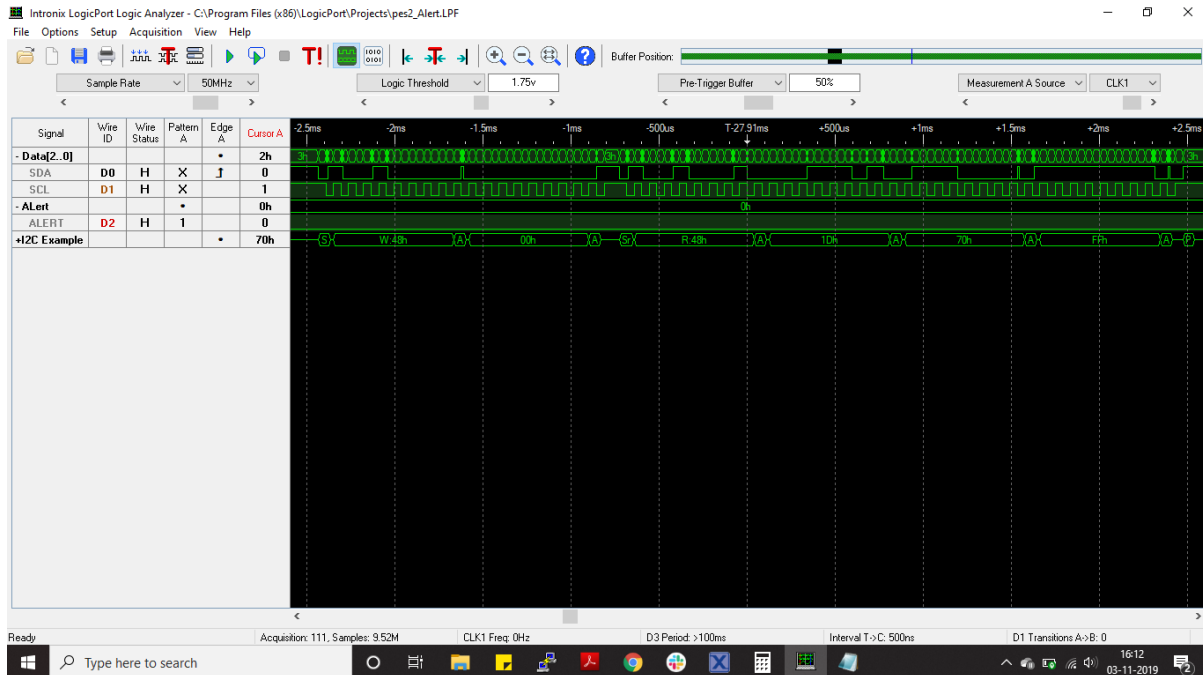

- 2) Another I2C Read Transaction

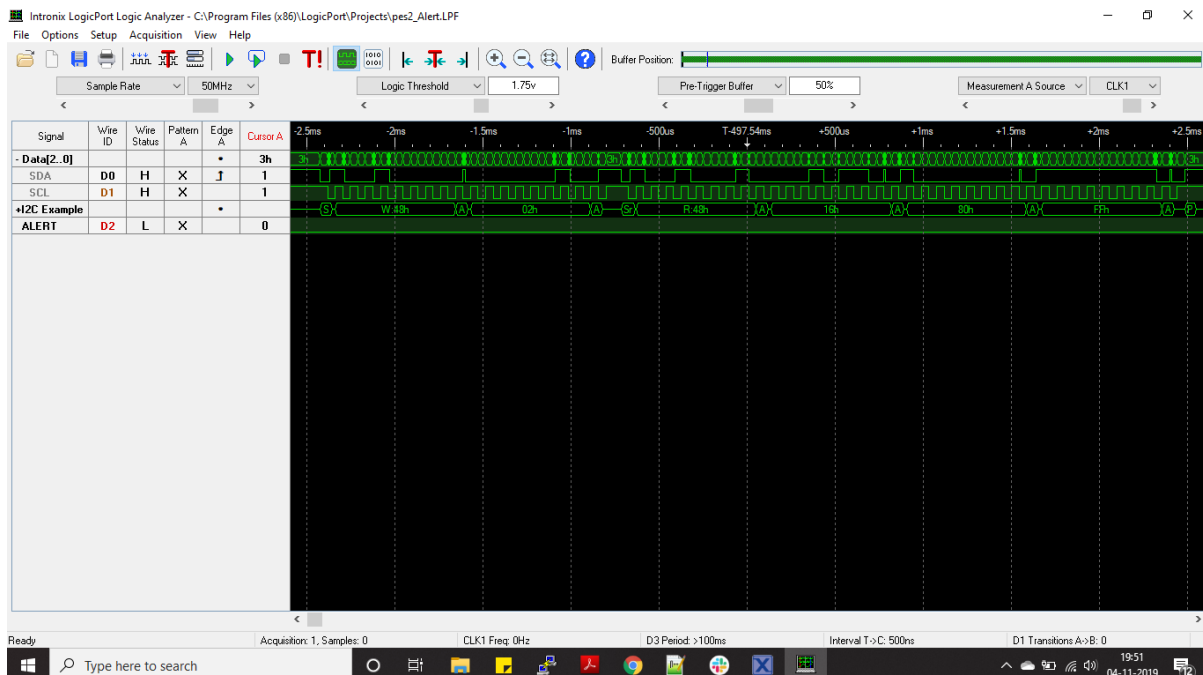

3) I2C Write Transaction to configuration register

01h – Configuration Register address

66h – Byte1 Value

60h – Byte2 Value

