

# MAEDLER Product Brochure

(V2021)AN)




2.1 Maedler Roller Chains



2.2 Maedler Sprockets



2.3 Chain Tensioning Wheels

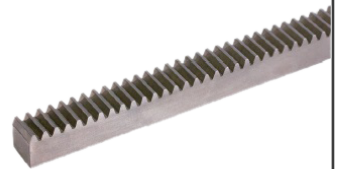


2.4 Chain Tensioners



2.5 Maedler Spur Gear



2.6 Maedler Spur Racks



2.7 Maedler Timing Belt




2.8 Maedler Timing Pulley



2.9 Maedler Bevel Gears



2.10 Maedler Worms and Worm Gears



2.11 Maedler Splined Shafts



2.12 Maedler Splined Hubs



2.13 Maedler Locking Assemblies



2.14 Maedler Shrink Disks



2.15 Maedler Couplings



2.16 Maedler Gearboxes



2.17 Maedler Geared Motors



2.18 Sliding hubs



2.19 Precision Levelling Adjusters



2.20 Thrust Pads with Spring Retainer



2.21 Levelling Pads



2.22 Articulated/Levelling Feet



2.23 Machine Mounts



2.24 Rubber-Metal Buffers

**Maedler** is a 138 years old German brand with headquarter in Stuttgart. It was founded by Mr. Bruno Maedler in 1882. They are like walmart of industrial mechanical products retailing. They have a varied Range of products which include Power transmission units, their accessories and other mechanical engineering products.

# MAEDLER Product Brochure

(V2021)JAN)



2.25 Heavy-Duty  
Metal-Rubber-Bushes




2.26 Profile Dampers



2.27 Shaft Collars, Clamp Collars




2.28 Quick Clamps

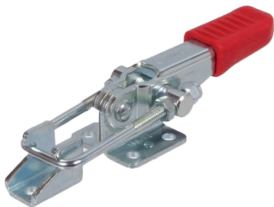

2.29 Latch Clamps



2.30 Bushes



2.31 Worm Gear Screw Jacks  
NP/I



2.32 Universal Joints



2.33 Pillow Block Bearings



2.34 Profiled Track Rollers LFR



2.35 Maedler Trapezoidal  
Spindles



2.36 Maedler Trapezoidal  
Thread Nuts



2.37 Maedler Ball Screw  
Spindles



2.38 Maedler Ball Nuts



2.39 Maedler Ball Transfer  
Units



2.40 Maedler Locknuts



2.41 Maedler Lockwasher

**Maedler** is a 138 years old German brand with headquarter in Stuttgart. It was founded by Mr. Bruno Maedler in 1882. They are like wall mart of industrial mechanical products retailing. They have a varied Range of products which include Power transmission units, their accessories and other mechanical engineering products.

# Table of contents

|                                          |            |                                              |                    |
|------------------------------------------|------------|----------------------------------------------|--------------------|
| <b>2.1 Maedler Roller Chains</b>         | <b>2.1</b> | <b>2.15 Maedler Couplings</b>                | <b>2.7 - 2.8</b>   |
| <b>2.2 Maedler Sprockets</b>             | <b>2.1</b> | 2.15.1 Rigid Couplings                       | 2.7                |
| <b>2.3 Chain Tensioning Wheels</b>       | <b>2.2</b> | 2.15.2 Torsionally Stiff Couplings           | 2.8                |
| <b>2.4 Chain Tensioners</b>              | <b>2.2</b> | 2.15.3 Elastic Couplings                     | 2.8                |
| <b>2.5 Maedler Spur Gear</b>             | <b>2.3</b> | 2.15.4 Curved-Tooth Gear Couplings           | 2.8                |
| 2.5.1 Straight Tooth Gear                | 2.3        | <b>2.16 Maedler Gearboxes</b>                | <b>2.9 - 2.10</b>  |
| 2.5.2 Helical Tooth Gear                 | 2.3        | 2.16.1 Helical Gearboxes                     | 2.9                |
| <b>2.6 Maedler Gear Racks</b>            | <b>2.4</b> | 2.16.2 Bevel Gearboxes                       | 2.9                |
| 2.6.1 Straight Tooth Rack                | 2.4        | 2.16.3 Worm Gear Units                       | 2.10               |
| 2.6.2 Helical Tooth Rack                 | 2.4        | <b>2.17 Maedler Geared Motors</b>            | <b>2.10 - 2.11</b> |
| <b>2.7 Maedler Timing Belt</b>           | <b>2.4</b> | 2.17.1 Small Geared Motors                   | 2.10               |
| <b>2.8 Maedler Timing Pulley</b>         | <b>2.5</b> | 2.17.2 Helical Geared Motors                 | 2.10               |
| <b>2.9 Maedler Bevel Gears</b>           | <b>2.5</b> | 2.17.3 Small Worm Geared Motors              | 2.11               |
| <b>2.10 Maedler Worms and Worm Gears</b> | <b>2.5</b> | 2.17.4 Planetary Small Geared Motors         | 2.11               |
| <b>2.11 Maedler Splined Shafts</b>       | <b>2.5</b> | 2.17.5 Worm Geared Motors                    | 2.11               |
| <b>2.12 Maedler Splined Hubs</b>         | <b>2.6</b> | <b>2.18 Sliding hubs</b>                     | <b>2.11</b>        |
| <b>2.13 Maedler Locking Assemblies</b>   | <b>2.6</b> | <b>2.19 Precision Levelling Adjusters</b>    | <b>2.12</b>        |
| <b>2.14 Maedler Shrink Disks</b>         | <b>2.6</b> | <b>2.20 Thrust Pads with Spring Retainer</b> | <b>2.12</b>        |
|                                          |            | <b>2.21 Levelling Pads</b>                   | <b>2.12</b>        |
|                                          |            | <b>2.22 Articulated/Levelling Feet</b>       | <b>2.12</b>        |
|                                          |            | <b>2.23 Machine Mounts</b>                   | <b>2.13</b>        |

# Table of contents

|                                             |             |                                             |             |
|---------------------------------------------|-------------|---------------------------------------------|-------------|
| <b>2.24 Rubber-Metal Buffers</b>            | <b>2.13</b> | <b>2.33 Pillow Block Bearings</b>           | <b>2.17</b> |
| <b>2.25 Heavy-Duty Metal-Rubber -Bushes</b> | <b>2.13</b> | 2.33.1 Light-Duty Pillow Block Bearings     | 2.17        |
| <b>2.26 Profile Dampers</b>                 | <b>2.14</b> | 2.33.2 Cap Bearings                         | 2.17        |
| <b>2.27 Shaft Collars, Clamp Collars</b>    | <b>2.14</b> | 2.33.3 Heavy-Duty Pillow Block Bearings     | 2.17        |
| <b>2.28 Quick Clamps</b>                    | <b>2.14</b> | <b>2.34 Profiled Track Rollers LFR</b>      | <b>2.17</b> |
| <b>2.29 Latch Clamps</b>                    | <b>2.14</b> | <b>2.35 Maedler Trapezoidal Spindles</b>    | <b>2.18</b> |
| <b>2.30 Bushes</b>                          | <b>2.15</b> | <b>2.36 Maedler Trapezoidal Thread Nuts</b> | <b>2.18</b> |
| 2.30.1 Sintered Bronze Bushes               | 2.15        | <b>2.37 Maedler Ball Screw Spindles</b>     | <b>2.18</b> |
| 2.30.2 Slotted Bushes                       | 2.15        | <b>2.38 Maedler Ball Nuts</b>               | <b>2.18</b> |
| 2.30.3 Plastic Bushes                       | 2.15        | <b>2.39 Maedler Ball Transfer Units</b>     | <b>2.19</b> |
| 2.30.4 Drill Bushes                         | 2.15        | <b>2.40 Maedler Locknuts</b>                | <b>2.19</b> |
| <b>2.31 Worm Gear Screw Jacks NP/I</b>      | <b>2.16</b> | <b>2.41 Maedler Lockwasher</b>              | <b>2.19</b> |
| <b>2.32 Universal Joints</b>                | <b>2.16</b> |                                             |             |
| 2.32.1 Single Universal Joints              | 2.16        |                                             |             |
| 2.32.2 Double Universal Joints              | 2.16        |                                             |             |
| 2.30.3 Telescopic Double Universal Joints   | 2.16        |                                             |             |



## 2.1 Maedler Roller Chains

Maedler Roller chains (DIN ISO 606) are available with different types such as Single strand, Double strand & Tripple strand made from special, high-quality steel, or lubrication-free, with additional nickel plating, or in stainless steel. Maedler Roller chains are available with straight and bent attachments, one-sided or two-sided attached to the outer link with a distance of 2xp, 4xp, 6xp etc. Other distances available at short notice on request. Connecting links are available to connect the roller chain. Also, accessories like Chain Tensioners, Chain Puller, Chain breaker, Chain lubrication spray are available with ready stock at Germany.

High-quality simplex roller chains, pre-stretched according to DIN. With straight link plates, to use as conveyor chain or drive chain.



### Selection Parameters

| Parameters     | Min   | Max     |
|----------------|-------|---------|
| Pitch          | 4 mm  | 38.1 mm |
| No. of Strands | 1     | 3       |
| Temperature    | -10°C | 120°C   |

### Industries it caters to

Printing Press Applications  
Tube Drawing Machines  
Conveyor Systems

## 2.2 Maedler Sprockets

Maedler Sprockets are available for single strand, double strand & tripple strand roller chains with hub or without hub made from Steel C45, Plastic polyacetal, Stainless steel 1.4305, Low carbon steel. Taper bushes are also available for these sprockets.



Sprockets in maedler are ready to install for various shaft diameters.

### Industries it caters to

Printing Press Applications  
Tube Drawing Machines  
Conveyor Systems

### Selection Parameters

| Parameters     | Min  | Max     |
|----------------|------|---------|
| Pitch          | 4 mm | 38.1 mm |
| No. of Strands | 1    | 3       |
| No of Teeth    | 9    | 120     |

## 2.3 Chain Tensioning Wheels

Maedler Chain Tensioning wheels KSP with bearing for Single strand roller chain DIN ISO 606 (ex DIN 8187) available with material steel C45. Mounting screws for tensioning wheels KSP are also available.



### Industries it caters to

Printing Press Applications  
Tube Drawing Machines  
Conveyor Systems

### Selection Parameters

| Parameters     | Min      | Max        |
|----------------|----------|------------|
| Pitch          | 3/8 inch | 1 1/4 inch |
| No of Teeth    | 12       | 23         |
| Temperature    | - 20°C   | 120°C      |
| No. of Strands | 1        | 3          |

## 2.4 Chain Tensioners

Maedler Chain tensioners are available for Single strand, Double strand & Tripple strand roller chains.



### Industries it caters to

Printing Press Applications  
Tube Drawing Machines  
Conveyor Systems

### Selection Parameters

| Parameters     | Min      | Max       |
|----------------|----------|-----------|
| Pitch          | 45.81 mm | 106.14 mm |
| No of Teeth    | 13       | 18        |
| Temperature    | - 20°C   | 80°C      |
| No. of Strands | 1        | 3         |

## 2.5 Maedler Spur Gear

Maedler Spur Gear or Pinion (Straight tooth) available with material Polyacetal/ Polyketone, POM white & black, Brass, Steel, Stainless steel (teeth hardened & ground). These spur gears are having module 0.5, 0.7, 1, 1.25, 1.5, 2, 3, 5, 6. Maedler Spur Gear or Pinion (Helical tooth) available with material Brass, Steel (right or left hand, hardened and ground).



### Industries it caters to

Power Plants  
Material Handling  
Printing Industry  
Factory Automation

### Product application

Polishing Machine (SPM) GmbH  
USA- ASG 203 Machine

### 2.5.1 STRAIGHT TOOTH GEAR



#### Selection Parameters

| Parameters  | Min  | Max   |
|-------------|------|-------|
| Module      | 0.3  | 8     |
| Tooth Width | 2 mm | 80 mm |
| No of Teeth | 9    | 120   |

### 2.5.2 HELICAL TOOTH GEAR



#### Selection Parameters

| Parameters  | Min  | Max   |
|-------------|------|-------|
| Module      | 0.3  | 5     |
| Tooth Width | 5 mm | 50 mm |
| No of Teeth | 10   | 50    |

## 2.6 Maedler Gear Racks

Maedler Gear rack are available with straight teeth, material: Polyacetal, POM, Brass, Steel, Stainless steel with teeth hardened or milled. These straight teeth rack are having module 0.5, 0.7, 1, 1.25, 1.5, 2, 2.5, 3, 4, 5, 6, 8. Maedler Round Gear rack available with module 1, 1.5, 2, 2.5, 3, 4, 5, 6. Maedler Helical tooth gear rack (square, right or left hand) available with module 2, 3, 4, 5 & material: steel, 16MnCr5, C45.



### Industries it caters to

Power Plants  
Material Handling  
Printing Industry  
Factory Automation

#### 2.6.1 STRAIGHT TOOTH GEAR



#### 2.6.2 HELICAL TOOTH GEAR



#### Selection Parameters

| Parameters  | Min  | Max   |
|-------------|------|-------|
| Module      | 0.3  | 8     |
| Tooth Width | 2 mm | 80 mm |
| No of Teeth | 9    | 120   |


#### Selection Parameters

| Parameters  | Min  | Max   |
|-------------|------|-------|
| Module      | 0.3  | 5     |
| Tooth Width | 5 mm | 50 mm |
| No of Teeth | 10   | 50    |

## 2.7 Maedler Timing Belt

Maedler has three main types of timing belts T, AT and HTD. The T and AT are trapezoidal profiles whereas HTD is half round profile. Also inch series MXL, XL, L and H are available in Maedler.

#### 2.5 MAEDLER TIMING BELT

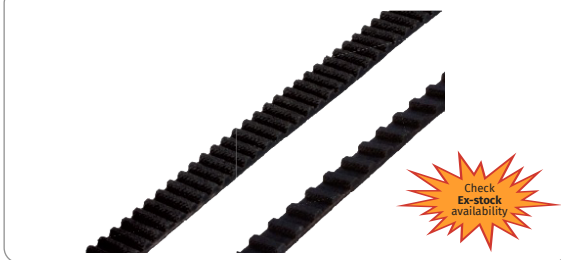

### Industries it caters to


Power Plants  
Material Handling  
Printing Industry  
Factory Automation

#### Selection Parameters

| Parameters    | Min      | Max    |
|---------------|----------|--------|
| Pitch         | 2.032 mm | 20 mm  |
| Tensile Force | 35 N     | 2240 N |
| Temperature   | - 20°C   | 100°C  |

## 2.8 Maedler Timing Pulley

Maedler has Timing Pulleys for respective Timing Belt profiles like T,AT HTD and Inch series timing

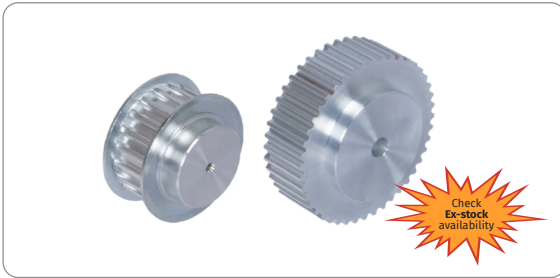

### Industries it caters to

Food Industry  
Machine building Industry

### Selection Parameters

| Parameters        | Min    | Max   |
|-------------------|--------|-------|
| No of Teeth       | 10     | 192   |
| Timing Belt width | 3.2 mm | 85 mm |

## 2.9 Maedler Bevel Gears



Maedler Bevel Gears are available in straight and spiral tooth system. The gear ratio Ranges from 1:1 to 5:1.

### Industries it caters to

Cement Mills  
Defence Applications  
Packaging Industry

### Selection Parameters

| Parameters        | Min   | Max   |
|-------------------|-------|-------|
| Gear ratio        | 1:1   | 5:1   |
| Module            | 0.5   | 8     |
| Tempearture range | -20°C | 140°C |
| No of teeth       | 10    | 60    |

## 2.10 Maedler Worms and Worm Gears

Maedler has Worm shafts and Worm wheels with right hand configuration as a standard. These are available in single and double thread version. The standard pressure angle is 20°.



### Industries it caters to

Packaging Industry

### Selection Parameters

| Parameters         | Min    | Max   |
|--------------------|--------|-------|
| Transmission ratio | 2.25:1 | 150:1 |
| Module             | 0.3    | 6.3   |
| No of teeth        | 16     | 100   |

## 2.11 Maedler Splined Shafts

Maedler Spline shafts (DIN ISO 14) are made up of material such as Steel C45, Steel 42CrMo4, Stainless steel 1.4301. These Spline shafts are available with number of splines 6 or 8 & with length such as 1000mm, 1500mm, 2000mm, 3000mm, 6000mm. Profiles are available from KW 11x14 to KW 46x54.



### Industries it caters to

Semiconductor Industry  
Packaging Industry

### Selection Parameters

| Parameters    | Min     | Max     |
|---------------|---------|---------|
| Length        | 1000 mm | 6000 mm |
| No of Splines | 6       | 8       |

### Product application

Polishing Machine (SPM) GmbH

## 2.12 Maedler Splined Hubs

Maedler Spline Hubs (DIN ISO 14) are made up of Steel C45Pb, Red brass Rg7, Stainless steel 1.4305 & available with flange or without flange. Clamp Collars for spline hubs (DIN ISO 14) are also available.



### Selection Parameters

| Parameters     | Min   | Max    |
|----------------|-------|--------|
| Outer Diameter | 20 mm | 100 mm |
| No of Splines  | 6     | 8      |

### Industries it caters to

Semiconductor Industry  
Packaging Industry

### Product application

Polishing Machine (SPM) GmbH

## 2.13 Maedler Locking Assemblies

Maedler Locking Assemblies also known as powerlock, keyless bushing are available with different types such as BAR, BAR QPQ, BAR stainless, COM-A, COM-A stainless, COM-AS, COM-B, COM-B stainless, COM-C, COM-CBI, COM-CB2, COM-CB3, COM-D, COM-L, COM-LL, COM-LLH, COM-R, MSA, MSD, MSD-N, MSM, MSM-N, SIG, SSG, ST, ST-B, ST-R, ST-K etc. Material: steel, Stainless steel 1.4401 (SS316). Taper Bushes are also available for these locking assemblies.



### Selection Parameters

| Parameters     | Min   | Max      |
|----------------|-------|----------|
| Outer Diameter | 16 mm | 165 mm   |
| Inner Diameter | 5 mm  | 120 mm   |
| Torque         | 2 Nm  | 38400 Nm |

### Industries it caters to

Material Handling  
Printing Industry  
Conveyor Systems

### Product application

Metering and mixing Machine

## 2.14 Maedler Shrink Disks

The Maedler Shrink Disks support quick mounting and dismounting. It is available for medium, high or very high torque.



### Selection Parameters

| Parameters     | Min    | Max     |
|----------------|--------|---------|
| Inner Diameter | 14 mm  | 85 mm   |
| Shaft diameter | 10 mm  | 75 mm   |
| Torque         | 30 Nm  | 6000 Nm |
| Axial Load     | 6.3 KN | 191 KN  |

### Industries it caters to

Material Handling  
Printing Industry  
Conveyor Systems

### Product application

Metering and Mixing Machine



## 2.15 Maedler Couplings

Maedler Rigid couplings (one piece MAS & two piece MAT) made up of steel C45, black oxide finish & Stainless steel 1.4305. It is available with keyway or without keyway. Maedler Torsionally stiff couplings are available with types such as HU, HB, HZ with blind holes, HF with blind holes, HZD with through holes, HFD with through holes. Maedler Elastic couplings are available with different types such as RN, RNG, RNI, RNT with taper bushes, RNK backlash free, RNH backlash free, DXA etc. Maedler Curved-Tooth Gear Couplings are available with different types such as BW polyamide 6.6, BOZ polyamide 6.6, BOS II Polyamide/sintered metal etc.



### Industries it caters to

Cement Industry

Food Industry

Pump Industry

### Product application

Small Light Generators

Small Machine Tools

Centrifugal Pumps and Generators

Flower Mills and Food Grinders

Cement Mills

### 2.15.1 RIGID COUPLINGS



#### Selection Parameters

| Parameters                   | Min      | Max      |
|------------------------------|----------|----------|
| Outer Diameter               | 64.8 mm  | 184.8 mm |
| Roller Width                 | 25 mm    | 112 mm   |
| Total width                  | 43 mm    | 99.2 mm  |
| Radial bearing Load capacity | 10.30 KN | 91.80 KN |
| Axial bearing Load capacity  | 4 KN     | 41.6 KN  |

## 2.15 Maedler Couplings (continued)

### Industries it caters to

Cement Industry

Food Industry

Pump Industry

### Product application

Small Light Generators

Small Machine Tools

Centrifugal Pumps and Generators

Flower Mills and Food Grinders

#### 2.15.2 TORSIONALLY STIFF COUPLINGS



#### Selection Parameters

| Parameters     | Min    | Max     |
|----------------|--------|---------|
| Outer Diameter | 14 mm  | 150 mm  |
| Inner Diameter | 3 mm   | 100 mm  |
| Torque         | 2.7 Nm | 5590 Nm |

### Industries it caters to

Cement Industry

Food Industry

Pump Industry

### Product application

Small Light Generators

Small Machine Tools

Centrifugal Pumps and Generators

Flower Mills and Food Grinders

#### 2.15.3 ELASTIC COUPLINGS



#### Selection Parameters

| Parameters         | Min        | Max         |
|--------------------|------------|-------------|
| Outer Diameter     | 14 mm      | 180 mm      |
| Inner Diameter     | 5 mm       | 58 mm       |
| Nominal torque     | 1.12 Nm    | 5500 Nm     |
| Max speed at 30m/s | 2500 min-1 | 40000 min-1 |

### Industries it caters to

Cement Industry

Food Industry

Pump Industry

### Product application

Small Light Generators

Small Machine Tools

Centrifugal Pumps and Generators

Flower Mills and Food Grinders

Cement Mills

#### 2.15.4 CURVED-TOOTH GEAR COUPLINGS




#### Selection Parameters

| Parameters     | Min         | Max         |
|----------------|-------------|-------------|
| Outer Diameter | 40 mm       | 53 mm       |
| Inner Diameter | 6 mm        | 24 mm       |
| Normal torque  | 5 Nm        | 24 Nm       |
| Peak torque    | 10 Nm       | 36 Nm       |
| Max speed      | 10000 min-1 | 13000 min-1 |

## 2.16 Maedler Gearboxes

Maedler has Helical , Bevel and Worm gearboxes made from special steel.

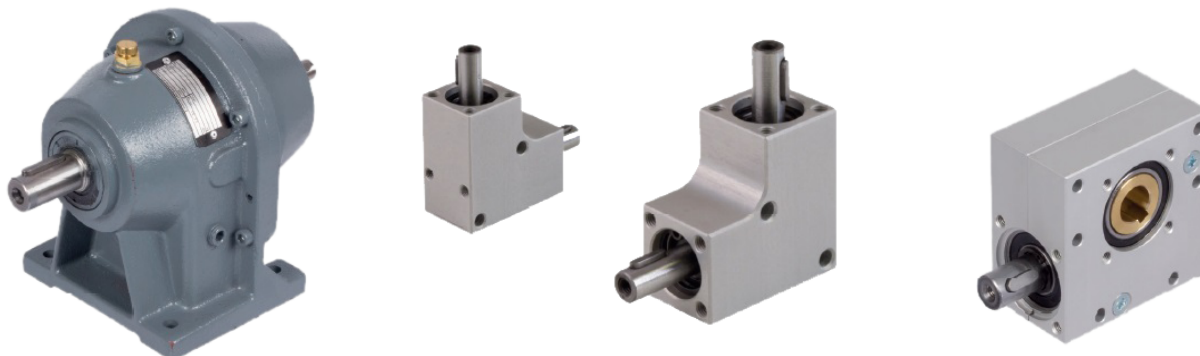

### Industries it caters to

Cement Industry  
Textile Industry  
Steel Industry  
Power Plant

### Product application

Federal-Mogul Burscheid GmbH Close cap SPM m/c  
Branner Gluing Machine

#### 2.16.1 HELICAL GEARBOXES



#### Selection Parameters

| Parameters    | Min     | Max    |
|---------------|---------|--------|
| Gear ratio    | 2:1     | 53:39  |
| Output Torque | 24.2 Nm | 700 Nm |


### Industries it caters to

Cement Industry  
Textile Industry  
Steel Industry  
Power Plant

### Product application

Federal-Mogul Burscheid GmbH Close cap SPM m/c  
Branner Gluing Machine

#### 2.16.2 BEVEL GEARBOXES

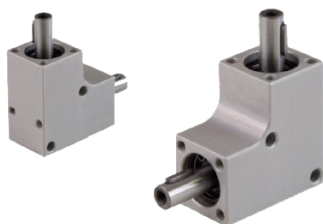

#### Selection Parameters

| Parameters    | Min     | Max    |
|---------------|---------|--------|
| Gear ratio    | 1:1     | 6:1    |
| Output Torque | 0.11 Nm | 600 Nm |

## 2.16 Maedler Gearboxes (continued)

### Industries it caters to

Cement Industry

Textile Industry

Steel Industry


Power Plant

### Product application

Federal-Mogul Burscheid GmbH Close cap SPM m/c

Branner Gluing Machine

### 2.16.3 WORM GEAR UNITS



#### Selection Parameters


| Parameters    | Min    | Max    |
|---------------|--------|--------|
| Gear ratio    | 4.83:1 | 100:1  |
| Output Torque | 4.5 Nm | 840 Nm |
|               |        |        |
|               |        |        |

## 2.17 Maedler Geared Motors

Maedler geared motors has different variants for different applications like



### 2.17.1 SMALL GEARED MOTORS

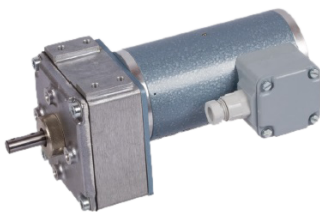

#### Selection Parameters

| Parameters     | Min        | Max       |
|----------------|------------|-----------|
| Idle speed     | 0.25 min-1 | 833 min-1 |
| Nominal Torque | 0.1 Nm     | 3.2 Nm    |
| Nominal power  | 3.7 W      | 57 W      |
|                |            |           |

### Industries it caters to

Food Industry

Agricultural Industry

### 2.17.2 HELICAL GEARED MOTORS



#### Selection Parameters

| Parameters     | Min     | Max       |
|----------------|---------|-----------|
| Idle speed     | 2 min-1 | 610 min-1 |
| Nominal Torque | 0.1 Nm  | 603 Nm    |
| Nominal power  | 0.09 KW | 5.55 KW   |
|                |         |           |

## 2.17 Maedler Geared Motors (continued)

### 2.17.3 SMALL WORM GEARED MOTORS



#### Selection Parameters

| Parameters     | Min       | Max        |
|----------------|-----------|------------|
| Idle speed     | 7.4 min-1 | 1000 min-1 |
| Nominal Torque | 1 Nm      | 5 Nm       |
| Nominal power  | 2.1 W     | 56 W       |

#### Industries it caters to

Food Industry

Agricultural Industry

### 2.17.4 PLANETARY SMALL GEARED MOTORS



#### Selection Parameters

| Parameters     | Min      | Max        |
|----------------|----------|------------|
| Idle speed     | 8 min-1  | 1852 min-1 |
| Nominal Torque | 0.003 Nm | 6 Nm       |
| Nominal power  | 2.1 W    | 49 W       |

#### Industries it caters to

Food Industry

Agricultural Industry

### 2.17.5 WORM GEARED MOTORS



#### Selection Parameters

| Parameters     | Min       | Max       |
|----------------|-----------|-----------|
| Idle speed     | 0.6 min-1 | 560 min-1 |
| Nominal Torque | 1.3 Nm    | 351 Nm    |
| Nominal power  | 45 W      | 1.5 KW    |

#### Industries it caters to

Food Industry

Agricultural Industry

## 2.18 Sliding hubs

Maedler Sliding hubs are available with different types such as Sliding Hubs with Torsionally-Flexible Coupling RNR, FS, FA as Torque limiters, FAK as Torque limiters, ROBA sliding hubs etc.



#### Selection Parameters

| Parameters     | Min        | Max         |
|----------------|------------|-------------|
| Outer Diameter | 30 mm      | 285 mm      |
| Inner Diameter | 3.7 mm     | 120 mm      |
| Nominal torque | 0.5 Nm     | 1360 Nm     |
| Max speed      | 1200 min-1 | 10000 min-1 |

#### Industries it caters to

Cement Industry

Food Industry

Pump Industry

## 2.19 Precision Levelling Adjusters

Maedler Precision Levelling Adjusters are available with different types such as MN 686.3, Ball head MN 686.4, Ball head MN 686.7, MN 686.1, MN 686.2, MN 686.8, MN 686.9 etc.



### Selection Parameters

| Parameters     | Min   | Max    |
|----------------|-------|--------|
| Outer Diameter | 25 mm | 80 mm  |
| Minimum Height | 8 mm  | 105 mm |
| Maximum Height | 19 mm | 144 mm |
| Maximum Load   | 40 KN | 495 KN |

## 2.20 Thrust Pads with Spring Retainer

Maedler Thrust Pads with Spring Retainer according to DIN 6311 and Factory Standard are made up of material such as Steel turned, case hardened and black oxide finish.



### Selection Parameters

| Parameters     | Min   | Max   |
|----------------|-------|-------|
| Outer Diameter | 12 mm | 80 mm |
| Height         | 7 mm  | 45 mm |

## 2.21 Levelling Pads

Maedler Levelling Pads are available in two types such as 2259, 2259 with external



### Selection Parameters

| Parameters     | Min   | Max   |
|----------------|-------|-------|
| Outer Diameter | 20 mm | 60 mm |
| Height         | 14 mm | 45 mm |
| Thread         | M6    | M24   |
| Static Load    | 4 KN  | 65 KN |

## 2.22 Articulated/Levelling Feet

Maedler Articulated/Levelling Feet are available with types such as 344 and 344.5 Plastic with Steel or Stainless Steel Bolt, 340 of Steel and 340.5 of Stainless Steel.



### Selection Parameters

| Parameters     | Min   | Max    |
|----------------|-------|--------|
| Outer Diameter | 50 mm | 100 mm |
| Ball Diameter  | 14 mm | 24 mm  |
| Static Load    | 11 KN | 28 KN  |



## 2.23 Machine Mounts

Maedler Machine Mounts are also known as Failsafe & made up of elastomer and



### Selection Parameters

| Parameters                        | Min      | Max       |
|-----------------------------------|----------|-----------|
| Permissible Permanent Static Load | 2700 N   | 6800 N    |
| Spring Load                       | 964 N/mm | 2793 N/mm |

## 2.24 Rubber-Metal Buffers

Maedler Rubber-Metal Buffers are available in different types such as KP, KE, MGP with Threaded Studs, AT, CT, MGA, MGE, MGI etc.



### Selection Parameters

| Parameters       | Min     | Max       |
|------------------|---------|-----------|
| Outer Diameter   | 8 mm    | 150 mm    |
| Height           | 5 mm    | 136 mm    |
| Thread           | M3      | M20       |
| Spring Load      | 13 N/mm | 3800 N/mm |
| permissible Load | 35 N    | 6000 N    |

**Product application**  
Office Machines

## 2.25 Heavy-Duty Metal-Rubber-Bushes

Maedler Heavy-Duty Metal-Rubber-Bushes are available with different types such as Heavy-Duty Steel Rubber Bushes PHO-P, Pressed-in-Version and Heavy-Duty Steel Rubber Bushes PHO-V, Vulcanized Version.



### Selection Parameters

| Parameters              | Min   | Max    |
|-------------------------|-------|--------|
| Inner Diameter          | 8 mm  | 50 mm  |
| Outer Diameter          | 16 mm | 80 mm  |
| Length of Internal Bush | 17 mm | 100 mm |
| length of External bush | 15 mm | 95 mm  |
| Temperature             |       | 80°C   |

**Industries it caters to**  
Automobile

**Product application**  
Car Manufacture as Elastic Joints

## 2.26 Profile Dampers

Maedler Profile Dampers are available with different types such as TA, TS, TR, TR-H etc.



### Selection Parameters

| Parameters                    | Min   | Max     |
|-------------------------------|-------|---------|
| Dynamic Force Range           | 218 N | 90000 N |
| Permissible Temperature Range | -40°C | 90°C    |
| Impact Velocity Range         |       | 5 m/s   |

## 2.27 Shaft Collars, Clamp Collars

Maedler Shaft Collars or Clamp Collars are available with different types such as single & double split, doublewide, Type B1, B2, GA, GR, S, N which are made up of Steel black, steel zinc plated, Stainless steel, Aluminium, Alu anodized etc.



### Selection Parameters

| Parameters     | Min   | Max    |
|----------------|-------|--------|
| Inner Diameter | 3 mm  | 100 mm |
| Outer Diameter | 16 mm | 140 mm |
| Width          | 9 mm  | 41 mm  |
| Temperature    | -40°C | 175°C  |

## 2.28 Quick Clamps

Maedler Quick Clamps come in two variants, one with vertical clamp and another with horizontal clamp. In both the variants the base is horizontal.




### Selection Parameters

| Parameters    | Min   | Max    |
|---------------|-------|--------|
| Holding Force | 400 N | 6200 N |

## 2.29 Latch Clamps

Maedler Latch Clamps are used for secure locking of lids and covers. These are also very fast operat-

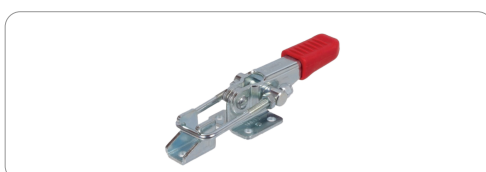

### Selection Parameters

| Parameters    | Min    | Max    |
|---------------|--------|--------|
| Holding Force | 1600 N | 3200 N |

## 2.30 Bushes

Maedler has different types of bushes like sintered bronze bushes, slotted bushes, plastic bushes, drill bushes



### 2.30.1 SINTERED BRONZE BUSHES



#### Selection Parameters

| Parameters     | Min  | Max    |
|----------------|------|--------|
| Outer Diameter | 6 mm | 142 mm |
| Inner Diameter | 3 mm | 98 mm  |
| Length         | 4 mm | 120 mm |

### 2.30.2 SLOTTED BUSHES



#### Selection Parameters

| Parameters     | Min    | Max   |
|----------------|--------|-------|
| Outer Diameter | 4.5 mm | 55 mm |
| Inner Diameter | 3 mm   | 50 mm |
| Length         | 4 mm   | 30 mm |

### 2.30.3 PLASTIC BUSHES



#### Selection Parameters

| Parameters     | Min   | Max   |
|----------------|-------|-------|
| Outer Diameter | 10 mm | 70 mm |
| Inner Diameter | 6 mm  | 60 mm |
| Length         | 6 mm  | 80 mm |
| Temperature    | -50°C | 240°C |

### 2.30.4 DRILL BUSHES



#### Selection Parameters

| Parameters     | Min  | Max   |
|----------------|------|-------|
| Outer Diameter | 7 mm | 42 mm |
| Inner Diameter | 4 mm | 30 mm |
| Length         | 8 mm | 25 mm |

## 2.31 Worm Gear Screw Jacks NP/I

Maedler has three standard variants of screw jacks. Version A is which requires to be twisting secured, Version B that comes with a groove that secures against twisting. The spindle moves in Version A and B. In Version C the threaded nut moves.




### Selection Parameters

| Parameters              | Min    | Max     |
|-------------------------|--------|---------|
| Maximum Stroke Force    | 2500 N | 50000 N |
| Required Torque at Max. | 1.5 Nm | 34 Nm   |

## 2.32 Universal Joints

Maedler has three types of Universal Joints which are also known as Cardan Joints. Single, Double and Telescopic Double Universal Joints.

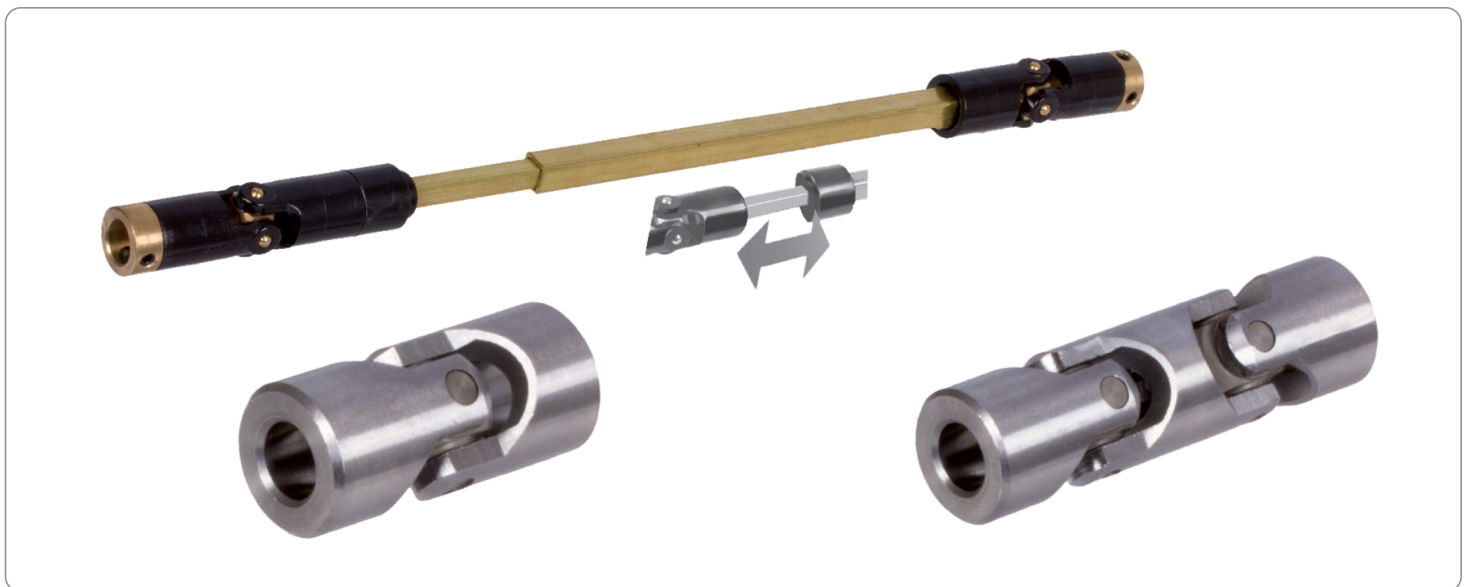

### 2.32.1 SINGLE UNIVERSAL JOINTS



### 2.32.2 DOUBLE UNIVERSAL JOINTS



### 2.32.1 TELESCOPIC DOUBLE UNIVERSAL JOINTS



#### Selection Parameters

| Parameters | Min       | Max        |
|------------|-----------|------------|
| Bore       | 2 mm      | 30 mm      |
| Torque     | 0.11 Nm   | 250 Nm     |
| Max Speed  | 500 min-1 | 4000 min-1 |

#### Selection Parameters

| Parameters | Min       | Max        |
|------------|-----------|------------|
| Bore       | 3 mm      | 30 mm      |
| Torque     | 0.08 Nm   | 225 Nm     |
| Max Speed  | 800 min-1 | 4000 min-1 |

#### Selection Parameters

| Parameters | Min       | Max        |
|------------|-----------|------------|
| Bore       | 2 mm      | 25 mm      |
| Torque     | 0.36 Nm   | 192 Nm     |
| Max Speed  | 500 min-1 | 4000 min-1 |

## 2.33 Pillow Block Bearings

Maedler has Pillow block bearings also known as Plummer blocks or Bearing Housing. The versions are available for Light duty and heavy duty applica-



### 2.33.1 LIGHT-DUTY PILLOW BLOCK BEARINGS



### 2.33.2 CAP BEARINGS



### 2.33.3 HEAVY-DUTY PILLOW BLOCK BEARINGS



#### Selection Parameters

| Parameters     | Min   | Max    |
|----------------|-------|--------|
| Inner Diameter | 15 mm | 40 mm  |
| Length         | 95 mm | 145 mm |
| Width          | 42 mm | 63 mm  |

#### Selection Parameters

| Parameters     | Min    | Max    |
|----------------|--------|--------|
| Inner Diameter | 25 mm  | 80 mm  |
| Length         | 165 mm | 290 mm |
| Width          | 42 mm  | 75 mm  |

#### Selection Parameters

| Parameters     | Min    | Max    |
|----------------|--------|--------|
| Inner Diameter | 30 mm  | 80 mm  |
| Length         | 160 mm | 300 mm |
| Width          | 60 mm  | 100 mm |

## 2.34 Profiled Track Rollers LFR

Maedler has Profiled track rollers also known as track roller bearings. The pressure angle is



#### Selection Parameters

| Parameters                            | Min      | Max     |
|---------------------------------------|----------|---------|
| Inner Diameter                        | 5 mm     | 40 mm   |
| Outer Diameter                        | 16 mm    | 98 mm   |
| Profile diameter                      | 4 mm     | 40 mm   |
| Temperature                           | -30°C    | 90°C    |
| Effective Dynamical Bearing Load Rate | 1.2 KN   | 54.8 KN |
| Effective Statical Bearing Load Rate  | 0.86 KNv | 29 KN   |

## 2.35 Maedler Trapezoidal Spindles

Maedler has Trapezoidal Spindles with Single and Double thread versions. The single thread version is available in different sizes and in left and right handed version. The Double thread variant is available in right hand thread version.



### Selection Parameters

| Parameters      | Min     | Max     |
|-----------------|---------|---------|
| Diameter x Lead | 10 x 3  | 70 x 10 |
| Length          | 1000 mm | 3000 mm |

## 2.36 Maedler Trapezoidal Thread Nuts

Maedler has Trapezoidal Nuts available for respective trapezoidal spindle. The Trapezoidal Nuts are available in flanged and cylindrical versions.



### Selection Parameters

| Parameters      | Min    | Max     |
|-----------------|--------|---------|
| Diameter x Lead | 10 x 3 | 70 x 10 |
| No of           | 1      | 2       |

## 2.37 Maedler Ball Screw Spindles

Maedler has rolled Ball screw spindles in T7 accuracy. Sizes from 8x2 to 63x10 are available.



### Selection Parameters

| Parameters | Min    | Max     |
|------------|--------|---------|
| Diameter   | 8 mm   | 63 mm   |
| Lead       | 2 mm   | 32 mm   |
| Length     | 245 mm | 3000 mm |

## 2.38 Maedler Ball Nuts

Maedler has rolled Ball screw spindles in T7 accuracy. Sizes from 8x2 to 63x10 are available.



### Selection Parameters

| Parameters    | Min     | Max     |
|---------------|---------|---------|
| Diameter      | 8 mm    | 63 mm   |
| Lead          | 2 mm    | 32 mm   |
| Ball Diameter | 1.2 mm  | 6.35 mm |
| Static Load   | 2.52 KN | 206 KN  |
| Dynamic Load  | 1.39 KN | 60.7 KN |



## 2.39 Maedler Ball Transfer Units

Maedler has different types of Ball transfer units for various applications. Some examples are units with steel sheet or solid steel housing, with threaded stud, tolerance ring or top flange mounted.



### Selection Parameters

| Parameters    | Min   | Max     |
|---------------|-------|---------|
| Ball Diameter | 8 mm  | 38.1 mm |
| Load          | 100 N | 11000 N |

### Industries it caters to

Material Handling

## 2.40 Maedler Locknuts

Maedler Locknuts are used for unsafe, quickly to loosen applications, or for a safe connection with an additional lockwash-



### Selection Parameters


| Parameters   | Min       | Max      |
|--------------|-----------|----------|
| Thread d x p | M8 x 0.75 | M100 x 2 |

### Industries it caters to

Steel Industry

## 2.41 Maedler Lockwasher

Lockwashers are used for a safe connection with locknut.

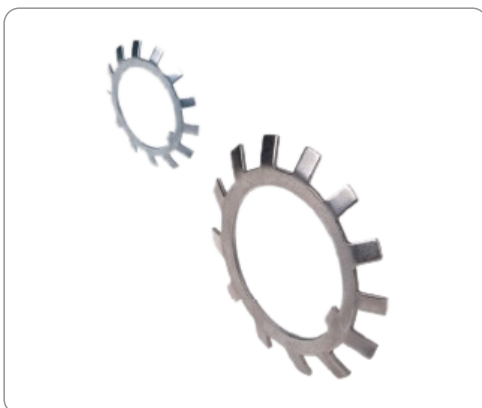

### Selection Parameters

| Parameters     | Min   | Max    |
|----------------|-------|--------|
| Inner Diameter | 10 mm | 100 mm |
| Outer Diameter | 21 mm | 142 mm |

### Industries it caters to

Steel Industry