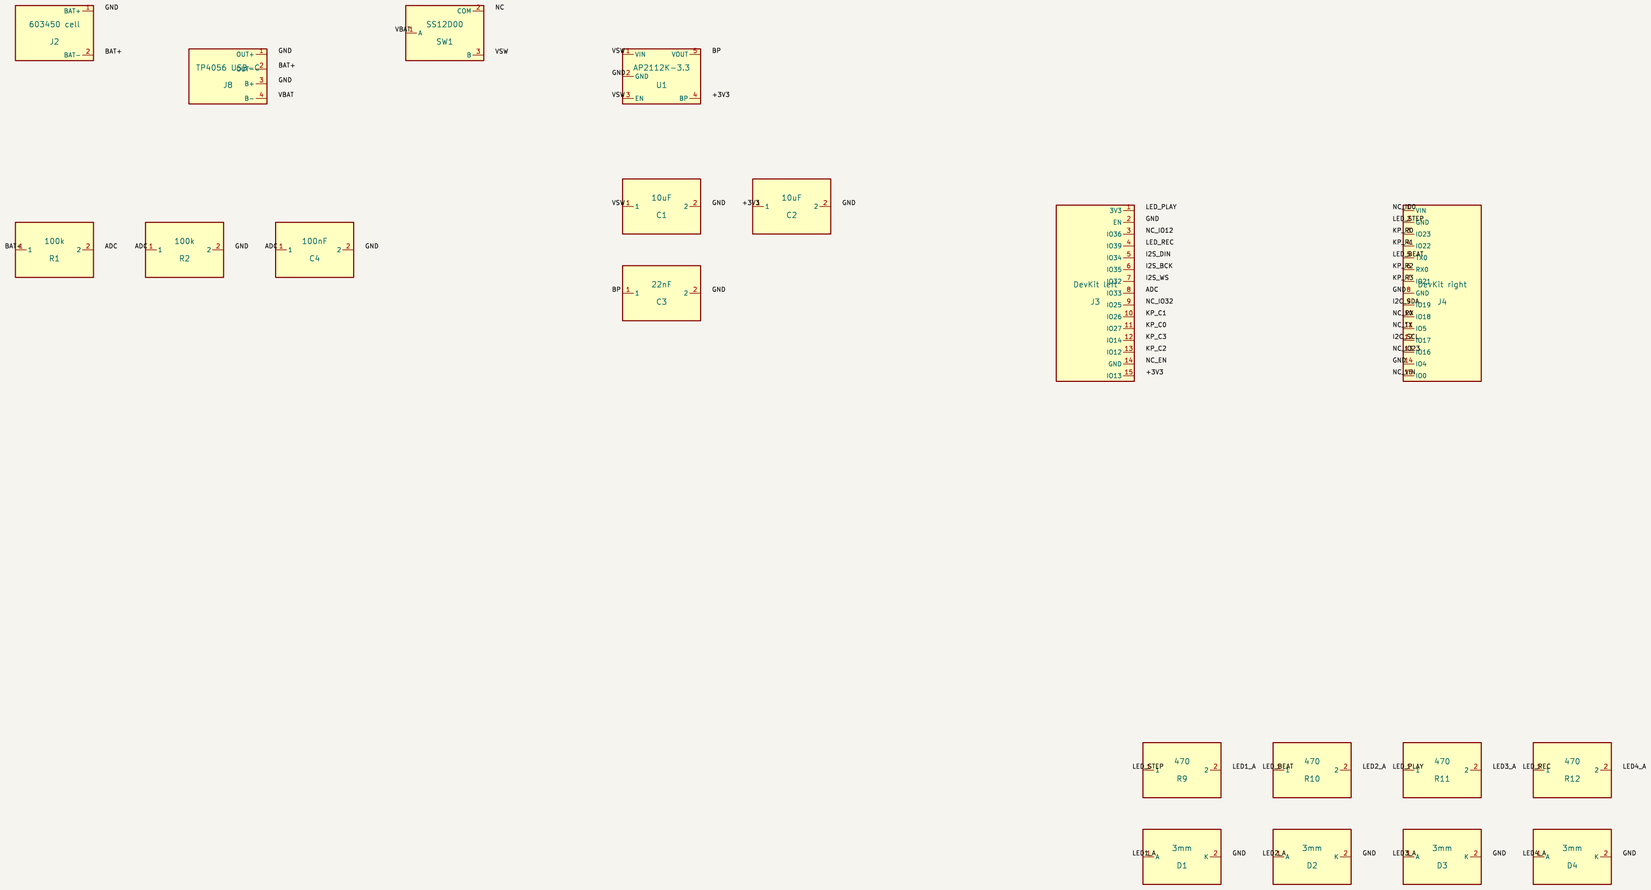


eld carrier. DOIT ESP32 DevKit V1, 30-pin, ESP32-D0WD.
d GPIO15 stay open (strapping). GPIO6-11 are inside the module.
tied to GND so the DAC PLL runs without a master clock.
and have 10k pull-ups. The membrane is rotated 90 degrees clockwise;
brane row/col to visual key order. See the README pin table.
otected OUT+ through SW1 into the AP2112. 3V3 feeds the DevKit 3V3 pin.
4 pin. The onboard AMS1117 cannot regulate a single Li-ion cell.

PCM5102A, SSD1306, HT16K33, 4x4 keypad, 4 LEDs
66 x 78 mm carrier, 2 layer

Sheet: /
File: mothdeck-handheld.kicad_sch

Title: MothDeck ESP32 DevKit handheld

Size: A2	Date: 2026-10-20	**Rev: 1**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1