


DANGER

Combustible liquid. Harmful if swallowed. Causes severe skin burns and eye damage... May cause an allergic skin reaction. Toxic if inhaled May cause damage to organs.

KEEP OUT OF REACH OF CHILDREN NET CONTENTS: 1 5 20 35 55 Gallon(s)

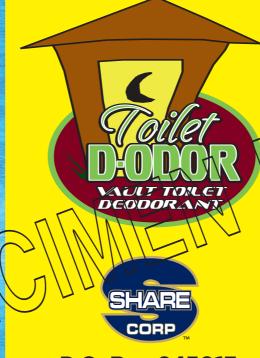

P.O. Box 245013 Milwaukee, WI 53224 (800) 776-7192 www.sharecorp.com









DANGER: Combustible liquid. Harmful if swallowed. Causes severe skin burns and eye damage. May cause an allergic skin reaction Toxic if inhaled. May cause damage

breathe mist, spray. Avoid breathing mist, spray. Wash thoroughly after handling Do not eat, drink or smoke when using this product. Use only outdoors or in well-ventilated area. Contaminated work clothing must not be allowed out of the workplace. Wear eye protection, protective clothing, protective gloves.

IF SWALLOWED: Rinse mouth, Do NOT induce vomiting. Call a POISON CENTER, a doctor if you feel unwell. IF ON SKIN (OR HAIR): Take off immediately all contaminated clothing. Rinse skin with water/shower. Wash contaminated clothing before reuse. IF INHALED: Remove person to fresh air and keep comfortable for breathing, Call a doctor, a POISON CENTER. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a doctor, a POISON CENTER

In case of fire: Use carbon dioxide (CO2), dry extinguishing powder, foam to extinguish.

Store in a well-ventilated place. Keep container tightly closed. Store in a well-ventilated place. Keep cool. Store locked up.

DISPOSAL:

0136.031517

Dispose of contents/container to comply with local/regional/national/international regulations.



TOILET D-ODOR vault toilet deodorant is a specially designed deodorizer for use in all types of chemical toilets, including tank type or recirculating toilets, holding tank systems, and portable tank toilets. When used as directed, this highly concentrated blend of powerful odor blockers and perfumes neutralizes objectionable waste odors to keep facilities fresh smelling. Extra power allows up to 7 days or more between pump outs. Contains NO **FORMAL DEHYDE!**

DIRECTIONS:

PORTABLE TOILETS: For summer use, add 8 to 12 ounces of **TOILET D-ODOR** per 60 gallons of toilet capacity. During winter or colder periods, use 3 to 6 ounces per 60 gallons of toilet capacity.

MARINE AND RV TOILETS: Add 16 ounces with sufficient water to cover the bottom of holding tank.

Note: Very warm weather, long time periods between pump-out, or heavy loading may require more treatment to adequately control odors. This product should not be used in septic systems or permanent pit toilets, as it will prevent bacterial digestion of wastes. Treated waste should be disposed of through municipal treatment plants - do not apply to farmland.

NFPA® RATINGS:

Health: 3; Flammability: 2; Reactivity: 0

CONTAINS/CAS#:

Water (7732-18-5); Alkyl(68%C12, 32%C14) dimethyl ethylbenzyl ammonium chloride (68956-79-6); Alkyl dimethyl benzyl ammonium chloride (C12-18) (68391-01-5): Linear alcohol Ethoxylate (34398-01-1); Ethanol (64-17-5); Fragrance/Mixture.

For industrial and commercial use only.

For additional information, see Safety Data Sheet.