



# RUBBER & TIRE Dressing

**SILICONIZED PROTECTANT**

**PROTECTS AND SEALS RUBBER.  
EXTENDS THE LIFE OF AUTOMOTIVE TIRES.**

## DANGER

**Flammable liquid and vapor. May be fatal if swallowed  
and enters airways. Suspected of causing cancer.**

**KEEP OUT OF REACH OF CHILDREN**


**NET CONTENTS: 1 5 20 35 55 Gallon(s)**

# RUBBER & TIRE Dressing

**SILICONIZED PROTECTANT**



**PO BOX 245013  
MILWAUKEE, WI 53224  
800.776.7192  
www.sharecorp.com**

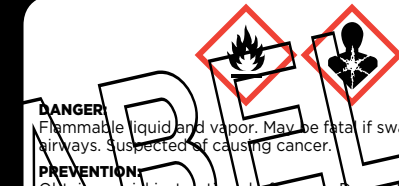

### DANGER

Flammable liquid and vapor. May be fatal if swallowed and enters airways. Suspected of causing cancer.

### PREVENTION:

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat, open flames, sparks. No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof lighting, electrical equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Wear eye protection, protective clothing, protective gloves.

### RESPONSE:

**IF SWALLOWED:** Immediately call a POISON CENTER, a doctor. Do NOT induce vomiting.

**IF ON SKIN (OR HAIR):** Take off immediately all contaminated clothing. Rinse skin with water/shower.

**If exposed or concerned:** Get medical advice/attention.

**In case of fire:** Use carbon dioxide (CO<sub>2</sub>), dry extinguishing powder, foam to extinguish.

Store in a well-ventilated place. Keep cool. Store locked up.

Dispose of contents/container to comply with local/regional/national/international regulations.

**RUBBER & TIRE DRESSING** is a specially formulated protectant and sealer for rubber surfaces, including blackwall and whitewall tires. Rubber surfaces will shine after one application, while its unique blend of polymers protects tires from the adverse effects of weather and ultraviolet radiation.

### DIRECTIONS:

**RUBBER & TIRE DRESSING** is ready to use with no measuring or unpleasant mixing. Simply spray onto the surfaces to be protected. No wiping is necessary.

### NFPA® RATINGS:

Health: 2; Flammability: 2; Reactivity: 0

### INGREDIENTS/CAS #:

Distillates (Petroleum), Hydrotreated Light (64742-47-8); Polydimethylsilicone (63148-62-9); Mixed Xylenes (1330-20-7); Cumene (98-82-8); Toluene (108-88-3).

*For industrial and commercial use only.*

*For additional information, see Safety Data Sheet.*

### WARNING:

This product contains, or may contain, trace quantities of a substance(s) known to the state of California to cause cancer and/or reproductive toxicity.



Please Recycle.

1125.052915