




P.O. Box 245013 • Milwaukee, WI 53224 • (800) 776-7192 • www.sharecorp.com

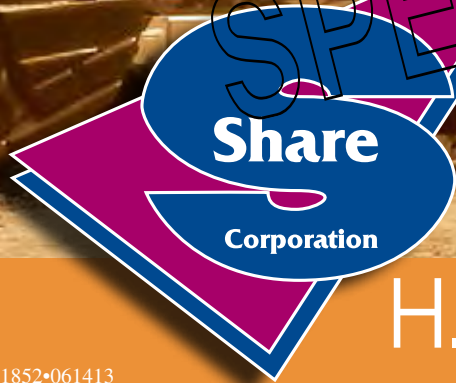


Share's H.D. MULTI-PURPOSE GREASE has a list of benefits so impressive that you won't believe we could fit such a phenomenal lubricant into one tube. A lithium based grease, H.D. MULTI-PURPOSE GREASE can endure and combat the most severe conditions your equipment or machinery may operate under. Extreme pressure and temperature will not affect its performance. In fact, H.D. MULTI-PURPOSE GREASE has a proven dropping point of over 500°F. Its excellent clinging ability ensures that it will continue to lubricate the hardest working machinery. Give H.D. MULTI-PURPOSE GREASE your toughest operating conditions and you can count on three things... adhesion, performance and endurance.

Great for use in:

- Industrial applications
- Automotive applications
- Mining applications
- Shock loading applications

Provides Protection for:

- Water pumps
- Bushings
- Slides
- Gears
- Bearings
- Press rolls
- Chassis points
- Disk brake systems



TYPICAL SPECIFICATIONS

NLGI Grade	2
Color	Blue
Thickener Type	Lithium Complex
Viscosity @ 40°C, cSt	180-240
Viscosity @ 100°C, cSt	16.5-19.0
Viscosity Index, Min	90
Operating Temperature Range	-30°F to 325°F
Penetration Worked	265-295
Dropping Point (°F)	500+
Timken OK Load (lbs)	60
4 Ball EP Weld Point, kgf	315
4 Ball Wear Scar Diameter, mm	0.60

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

H.D. Multi-Purpose Grease

Lithium Complex Extreme Pressure Grease

NET WT. 14 OZ.