



Specialist of air quality



SZ Airkey Environmental Tech & Eng Co., Ltd

EPS Panel

Polystyrene sandwich panel (EPS sandwich board) is made of outer layers both sides of prepainted steel coil and inner layer of polystyrene that covered with high-strength adhesive.



EPS roof sandwich panel




EPS wall sandwich panel

Specification:


- ① Regular thickness: 50mm, 75mm, 100mm, 125mm, 150mm, 200mm
- ② Effective width: 950mm, 1150mm
- ③ Regular length: It depends on project requirement and transportation condition



Male and female joint

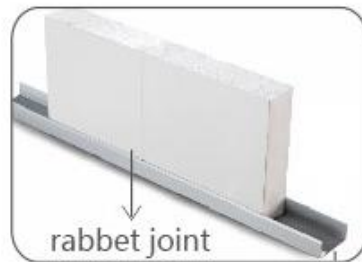

50mm trough aluminum

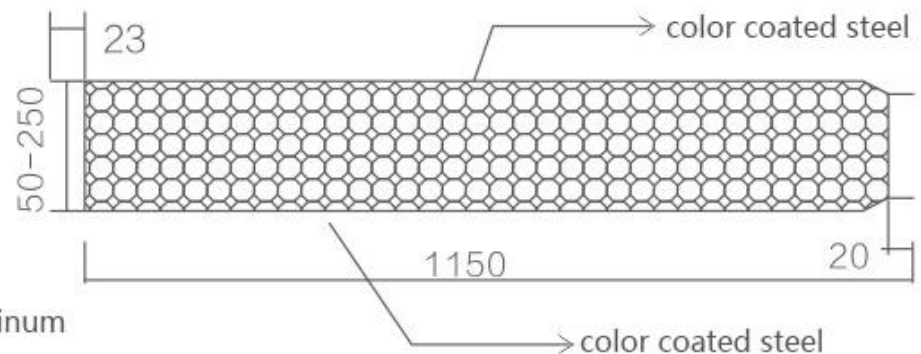

EPS Panel

Feature:


1. Light weight, 10~14kg/m²
2. Easy to install
3. Short work cycle, lower cost,
4. High-capacity, high-stiffness and intensity.
5. Flexible for using, the length of panel is according to the project requirements and term of installation and transportation.
6. Heat preservation and heat insulation, prevented sound pollution,
7. High-performance characteristic of moisturizing, the average of thermal conductivity is 0.032kcal/m
8. Lengths: As per requirement considering the transportation constraints.

Form of the spans of polystyrene sandwich panel house(Deformation controlled under L/240)

Spam Loading Kg/m	Thickness mm	50	75	100	150	200	250
25	m	5.19	6.91	8.09	9.91	11.45	12.80
50		3.74	4.96	5.72	7.01	8.09	9.05
100		2.53	3.49	4.05	4.96	5.72	6.40
150		1.90	2.70	3.31	4.05	4.67	5.23
200		1.40	2.10	2.80	3.51	4.05	4.53
250		1.10	1.70	2.30	3.13	3.62	4.05
300		0.90	1.40	1.90	2.86	3.31	3.70

EPS Panel

Tongue&Groove Type

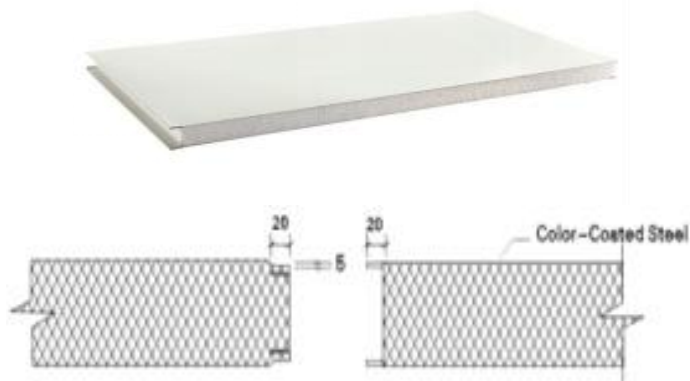


950mm width-Shapes

AK-EPS-TG950/40	AK-EPS-TG950/50
AK-EPS-TG950/75	AK-EPS-TG950/100
AK-EPS-TG950/150	AK-EPS-TG950/200
AK-EPS-TG950/250	

1050mm width-Shapes

AK-EPS-TG950/40	AK-EPS-TG950/50
AK-EPS-TG950/75	AK-EPS-TG950/100
AK-EPS-TG950/150	AK-EPS-TG950/200
AK-EPS-TG950/250	

Corrugated Type

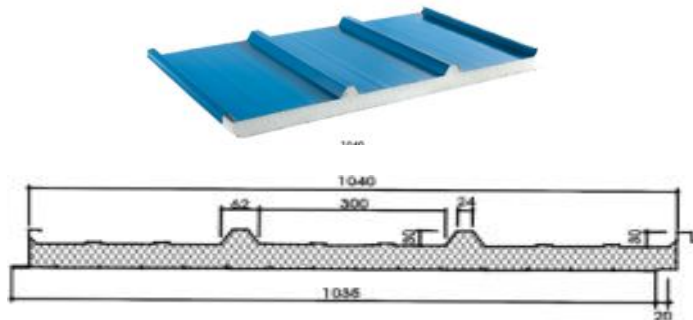

1050mm width-Shapes

AK-EPS-C1050/40	AK-EPS-C1050/50
AK-EPS-C1050/75	AK-EPS-C1050/100
AK-EPS-C1050/150	AK-EPS-C1050/200
AK-EPS-C1050/250	

EPS Panel

Applications:

Prefabricated house, Industrial sheds, Ware houses. Commercial complexes, indoor/Outdoor stadiums, cold storage, Buildings' indoor partitions , etc.



Cleanroom Stainless Steel Door



Construction:

- Door frame: 1.2mm Galvanized steel plate, 1.5mm SUS304 plate
- Door leaf: 1.0mm Galvanized steel plate, 1.0mm SUS304 plate
- Size recommended: 900x2100mm(Single), 1200x2100mm(Picture), 1500x2100mm(Double)

Feature:


- Embedded silicone rubber seal
- Seamless and adjustable hinges(Optional)
- Automatic sealing up and down door
- Silicone rubber sealing strip

Cleanroom Stainless Steel Door

Product Description

Product name	Steel Door	Stainless Steel Door
Model No.	AK-SD-2	AK-SUSD-3
Door frame	Galvanized steel	Stainless steel or SUS304
Finishing of door frame	Electrostatic powder treatment	Wiredrawing
Door leaf	Available in Galvanized steel plate and Melamine resin board	Available in stainless steel plate and Melamine resin board
Hinges type	Stainless steel hinge or Adjustable hinge	
Lock	Available in Hand lock and Hook lock	
Core material	Available in Paper honeycomb and Aluminum honeycomb	
Wall thickness available	50mm/100mm	

Cleanroom Stainless Steel Door

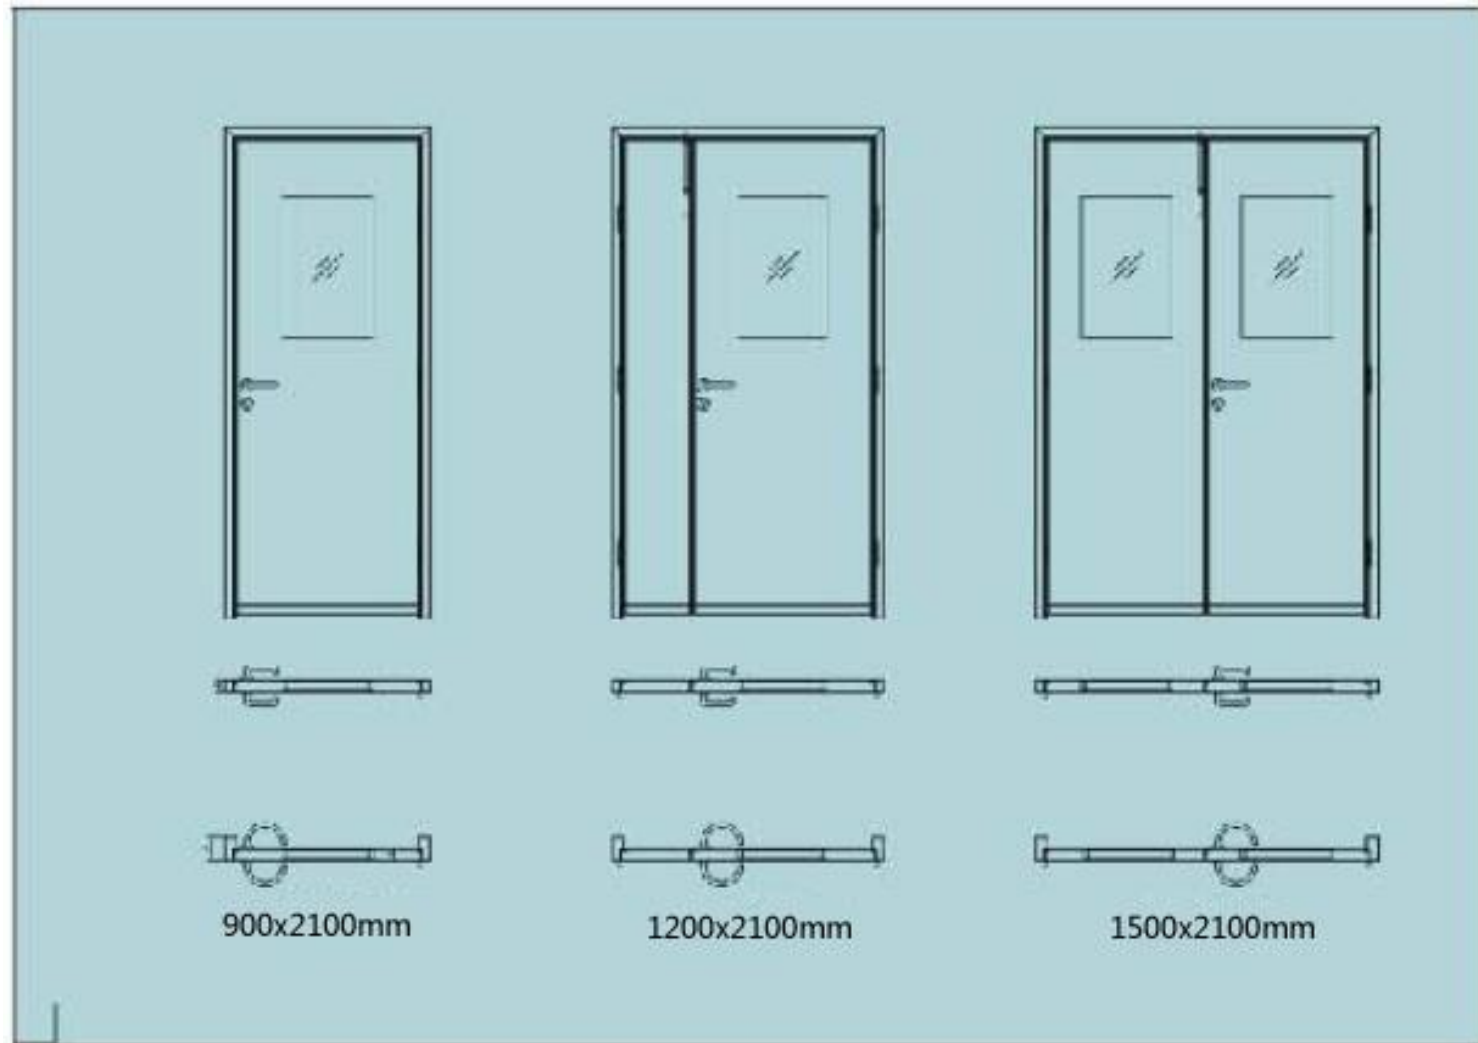

Airtight Door - Aluminum Frame



Construction:

- Aluminum frame: 1.2mm, Sandblasting and Oxidation treatment
- Door leaf: 0.5mm Sandwich panel and Melamine resin board
- Size recommended: 900x2100mm(Single), 1200x2100mm(Picture), 1500x2100mm(Double)

Feature:



- Bumper pad configuration (magnetic door)
- Seamless and adjustable hinges
- Automatic sealing up and down door
- Silicone rubber sealing strip
- Available in antimicrobial coating and anti VIP coating

Airtight Door - Aluminum Frame

Product Description

Product name	Aluminum Door / Magnetic Door
Model No.	AK-AD-1
Door frame	Aluminum
Finishing of door frame	Sandblasting and Oxidation treatment
Door leaf	Available in Sandwich panel and Melamine resin board
Hinges type	Adjustable hinge
Lock	Available in Hand lock and Hook lock
Core material	Available in Paper honeycomb and Aluminum honeycomb
Wall thickness available	50mm

Airtight Door - Aluminum Frame

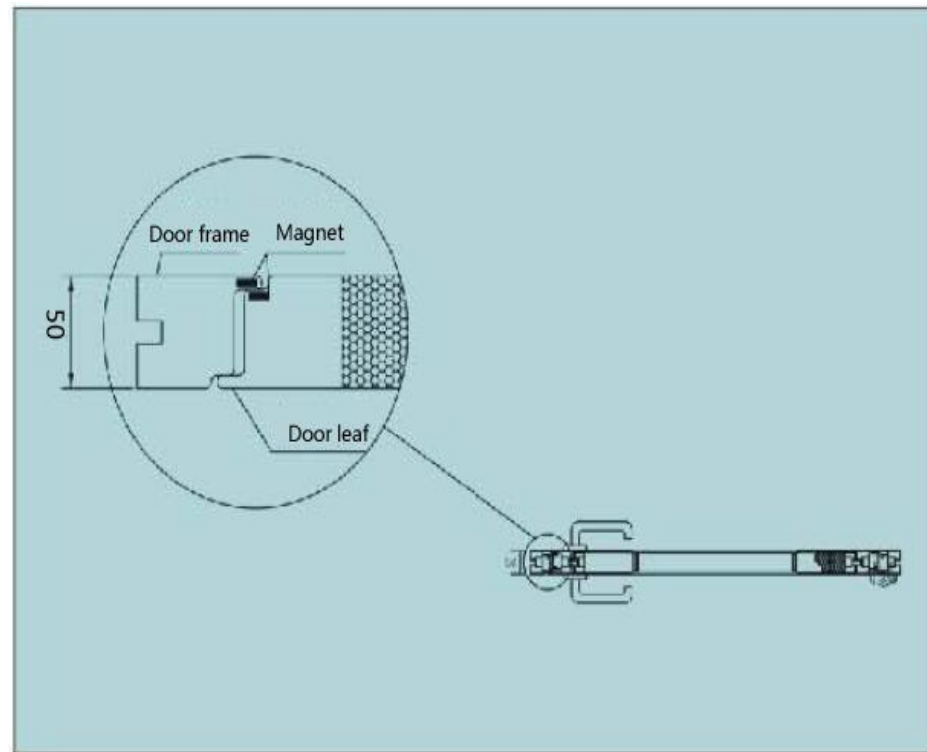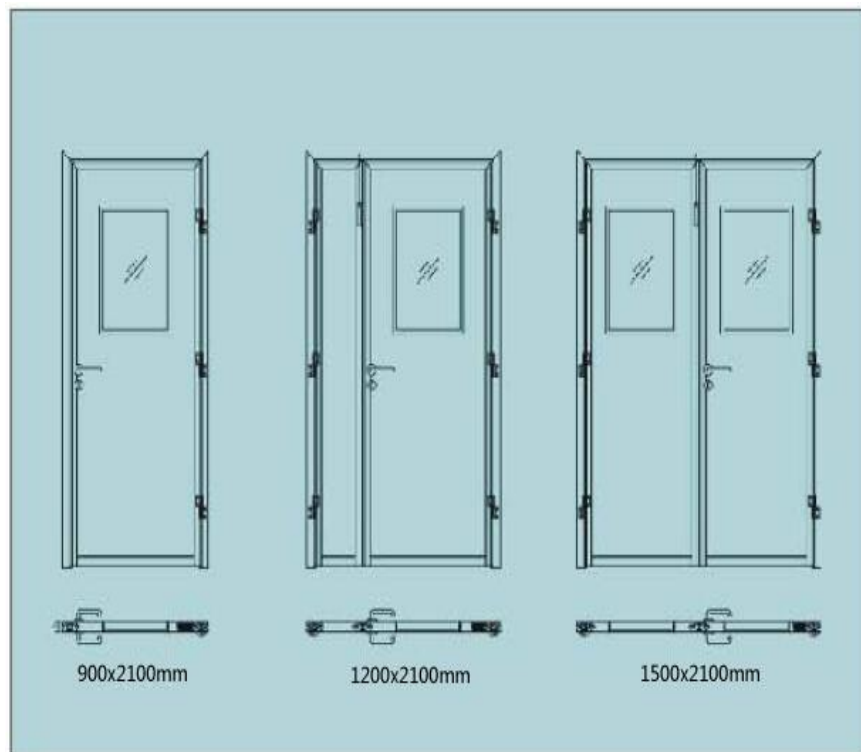

Project case





Bangladesh Walton



Walton is the latest multinational electrical, electronics, automobiles and other appliances brand in Bangladesh. We have done several HVAC clean room system for their factory, like TV workshop, Refrigerator workshop, Mobile phone workshop, PCB workshop

Interior decoration of Walton TV Project

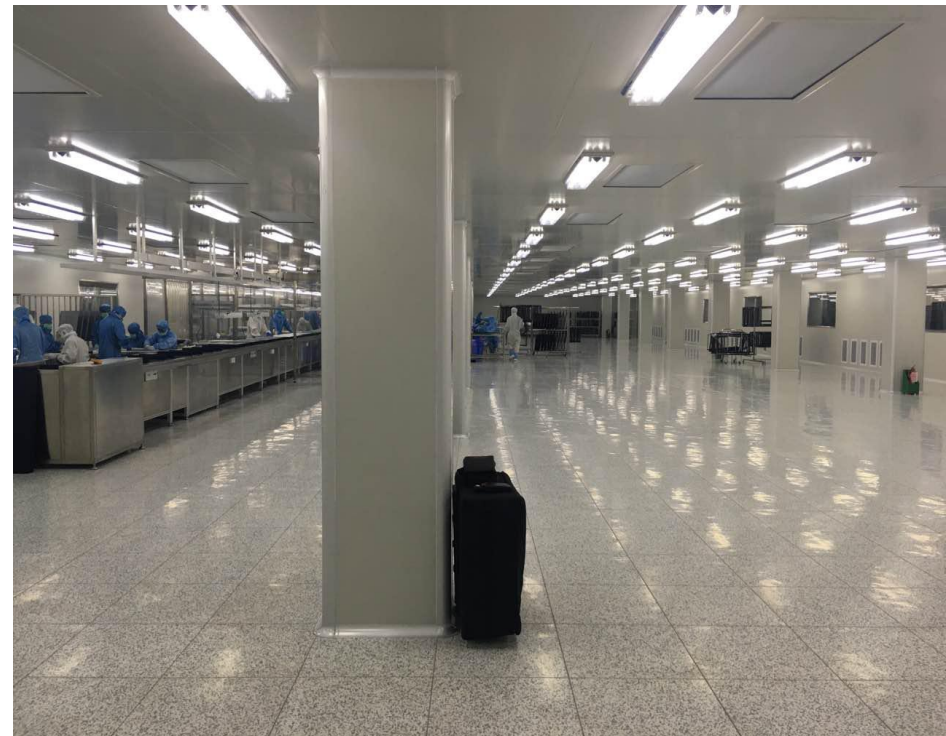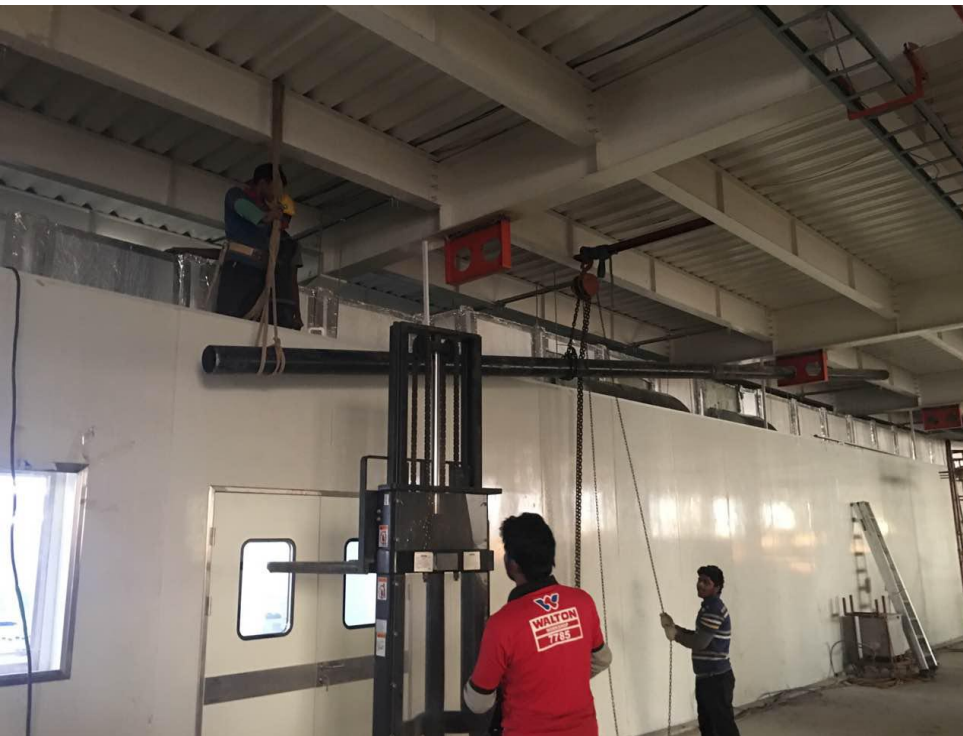

Temperature: $23 \pm 2^{\circ}\text{C}$; humidity: $55 \pm 5\%$.

Walton Compressor Project



Features:

The total area for Walton Compressor workshop is 20000sqm , and cleanroom covers 1000sqm.

Cleanroom Parameters: Class 10000; temperature: $24\pm 1^{\circ}\text{C}$; humidity: $45\pm 5\%$.

Workshop Parameters: temperature: below 30°C , humidity: below 65%

Interior decoration of COM Project

