


Primary Logomark

Primary Logomark (Positive)

The IDA logomark is set in Replica Bold. This structure has been carefully constructed and refined, and should not be altered or recreated in any way.

The positive version of the IDA logomark should be used on white and light-tone backgrounds and colors.



MINIMUM LOGO SIZE IS .75"

Primary Logomark (Negative)

The negative version of the IDA logomark should be used on black, mid- and dark-tone backgrounds and colors.



MINIMUM LOGO SIZE IS .75"


Typography

Construction & Usage

Construction

The primary logomark has been carefully constructed to balance form with functionality and legibility. Related width and spacing is reflected throughout the mark composition.


The outer dimension of the mark is constructed in a 4:3 ratio, matching the 4:3 standard aspect ratio that has been used since the invention of moving picture cameras.

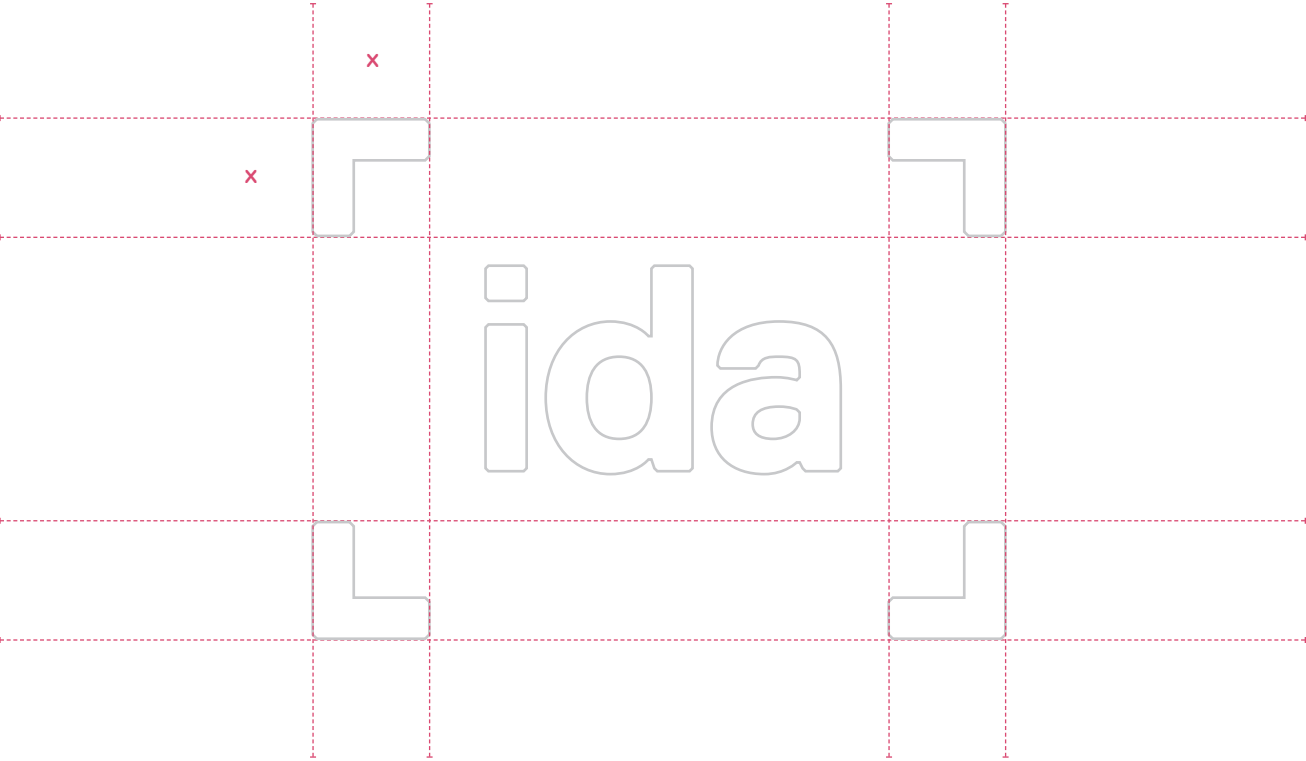

Area of Isolation

The logomark should always have a generous amount of space around it. The minimum space allowed is represented by the outer box drawn around the mark in the diagram below.

X/2 is the minimum space around the logomark. Nothing should fall within this area. The minimum space around the logomark is X/4 when used in digital applications.

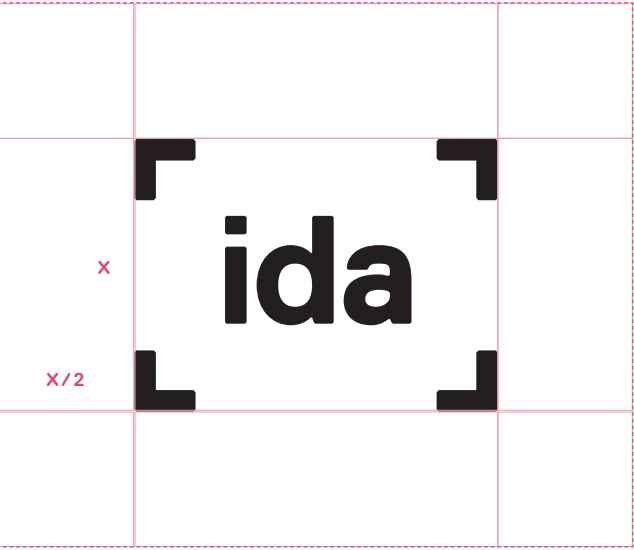

Primary Lock-up

Primary Lock-up (Positive)

The IDA lock-up is set in Replica Bold. This structure has been carefully constructed and refined, and should not be altered or recreated in any way.

The positive version of the IDA lock-up should be used on white and light-tone backgrounds and colors.



MINIMUM LOGO SIZE IS 1.5"

Primary Lock-up (Negative)

The negative version of the IDA lock-up should be used on black, mid- and dark-tone backgrounds and colors.



MINIMUM LOGO SIZE IS 1.5"

Color

Primary

Parent & Sub-brand

The IDA parent brand is drawn from a primary color palette of bold, simple and icon hues. It has been selected to pair with yet stand apart from the broader sub-brand palette on the adjacent page.

Please note: Color can shift dramatically from coated to uncoated stock so, in some cases, the coated and uncoated colors specified will have different numbers.




PMS 647C/294U
CMYK 92/67/34/0
RGB 20/84/168



PMS 348C/355U
CMYK 100/0/100/25
RGB 0/91/0



PMS 199C/U
CMYK 11/100/100/0
RGB 227/0/0



PMS 205C/U
CMYK 11/86/37/0
RGB 227/36/161




PMS 123C/115U
CMYK 0/30/100/0
RGB 255/179/0



PMS Cool Grey 11 C/U
CMYK 0/0/0/80
RGB 51/51/51



PMS Natural Black C/U
CMYK 71/64/65/68
RGB 16/29/29



PMS Cool Grey 1 C/U
CMYK 0/0/0/15
RGB 217/217/217



White