

# Algorithmic Analysis of Channel Machines Using Small Models

Jonathan Sharyari

24th November 2014

## Abstract

Verification of infinite-state systems is in general an undecidable problem, but nevertheless, solid correctness results are important in many real-life applications. It is commonly the case that such algorithms rely on unbounded buffers for their operation, communication protocols being a typical example. Building upon abstract interpretation techniques, this project presents a verification algorithm capable of verifying the correctness of algorithms relying on unbounded *lossy* buffers.

We have implemented our approach and used it to verify a number of well-known communication protocols. The experimental results are mixed, but in most cases comparable to that of other existing tools, justifying further research on the topic.

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>Notation and Terminology</b>	<b>6</b>
<b>3</b>	<b>Model</b>	<b>7</b>
3.1	Channel Systems . . . . .	7
3.2	Channel Transition Systems . . . . .	9
3.3	Reachability and Bad Configurations . . . . .	10
3.4	Traces . . . . .	10
<b>4</b>	<b>Problem Formulation</b>	<b>11</b>
<b>5</b>	<b>Abstract Interpretation</b>	<b>12</b>
5.1	Subwords and Views . . . . .	12
5.2	Abstractions and Concretizations . . . . .	12
5.3	Small Model Property . . . . .	12
5.3.1	Proofs . . . . .	13
<b>6</b>	<b>Extensions</b>	<b>14</b>
6.1	LIFO Channels . . . . .	14
6.2	Lossy Channels . . . . .	15
6.3	Channel Systems with Synchronization . . . . .	16
6.4	Alternating Bit Protocol Revised . . . . .	16
<b>7</b>	<b>Implementation of the Verification Method</b>	<b>17</b>
7.1	Naive implementation . . . . .	18
7.2	Improving the Implementation . . . . .	19
7.3	Better Implementation . . . . .	21
7.3.1	Control-State Partitioning . . . . .	21
7.3.2	Advantages of Partitioning . . . . .	21
7.4	Final Implementation . . . . .	23
7.5	Reachability Analysis . . . . .	24
7.6	Specification Language . . . . .	25
7.6.1	Example . . . . .	25
<b>8</b>	<b>Result</b>	<b>27</b>
8.1	Experimental Results . . . . .	28
8.2	Analysis of Results . . . . .	28
<b>9</b>	<b>Summary and Further Work</b>	<b>29</b>
<b>10</b>	<b>Related Work</b>	<b>30</b>
<b>A</b>	<b>Automata for the Sliding Window Protocol</b>	<b>33</b>

# 1 Introduction

Today's society grows more and more dependent on computer applications. Often they are used directly, for example the task of paying bills online. In other cases, applications are aiding us in a more abstract manner, e.g. controlling the elevator or planning a train schedule. The common factor between the online bank, the elevator relay and the train scheduler is that the correctness of these programs is of utter importance, where program failure could have devastating results on the economy, the infrastructure or even cause harm.

This has motivated research on various techniques to find and correct potential faults, particularly in safety-critical systems. The most common technique is that of *testing*, i.e. observing the system behaviour on a variety of likely or even unlikely scenarios. The widespread use of testing is well-motivated, but there are several scenarios, where testing by itself is insufficient, or difficult to carry out. It would for example be costly to verify the correctness of the aforementioned elevator only by testing, as a failure could result in damages on the system.

A technique used for verification is the process of *simulation*. In contrast to testing, simulation can be done in an early stage of the development. Rather than first implementing an algorithm, one may simulate an abstracted model of the algorithm which may help in ensuring its correctness or find a fault in the algorithm before development has begun. An important note is that simulation techniques are not intended to be used *instead* of testing, but rather in combination with testing, as an abstract model of a system can never fully represent the system as a whole.

A trend in today's computing is that applications become concurrent or distributed. Such programs are inherently difficult to verify, due to the fact that although processes themselves have finite models, the results of the behaviour of asynchronous processes may be infinite. This is the case for example when the composition of a possibly infinite number of processes is observed, a common scenario when verifying concurrent and distributed programs. Also, we are often not interested in performing verification of a *specific* composition of concurrent programs, but rather in verifying that it works for *all* compositions.

Related to this is the necessity for distributed and concurrent programs to communicate, and to do so accurately. In general, the underlying systems that we use for our communication are unreliable, in that message loss or message corruption may occur. This happens due to a variety of reasons, may that be faults in the communication links, relays or the communicating parties themselves. To overcome this problem, communication protocols are designed to be resistant to such faults, and ensuring the correctness of these protocols is paramount when ensuring reliable communication. Even when the number of communicating processes is finite, communication protocols commonly result in infinite models, as the number of sent messages may be unbounded, and there may be an infinite number of orderings thereof. The verification of such systems, which rely on communication channels, is the focus of this thesis.

The goal of *model checking* is to formally verify the correctness of concurrent

Do  
you  
mean  
I  
should  
have  
a  
reference  
for  
this?

programs with respect to a given specification. In general, given a model of a system and a specification of its intended properties, the task is to decide whether a model meets its specification or not.

Different representations of models and properties have been proposed, as well as techniques to perform the verification. One of the most successful and most common methods is that of *temporal logic model checking*. Traditionally, the model is expressed as a finite state machine and the properties as propositional logic formulae. Several verification methods for such models have been proposed[20] and although these methods have been applied to infinite models[12], the focus has in large been on the verification of finite models.

Another approach is taken by [1], in which the verification of *parameterized systems* is attempted. *Parameterized systems* are systems composed of a set of processes, where the number of processes is itself a parameter of the system. This is often the case when discussing concurrent and distributed programs. Although an undecidable problem, there are methods that can provide approximation techniques that allows us to reduce the verification task to the finite state case. These methods include *counter abstraction techniques*[22] and *invisible invariant* generation[5].

In [1], the authors take advantage of the *small model property* – if a small instance of a system is enough to exhibit the relevant behaviour of the system as a whole, that instance is a small model of the system

Didn't understand the comment regarding this

. An important contribution of [1] is that they show that this property holds for *quasi well-ordered systems*[3] (i.e. transitions systems monotonic with respect to a well-quasi ordering)

is this good enough, or did I just explain it in a circle?

, and indicates its use for yet larger sets of systems.

Using well-known techniques of *abstract interpretation* combined with the idea of small models, [1] shows that parameterized systems can in fact be reduced to finite and decidable approximations of the system, and a prototype implementation of the technique substantiates this claim by empirical results.

This essay draws the attention towards systems relying on communications over asynchronous unbounded buffers. This scenario is common in communication protocols using channels and in distributed computing[15]. An important note is that channel systems working on *perfect channels* are Turing powerful

Why powerful and not complete? difference?

, and therefore undecidable, but it has been shown that verification of safety properties of channel systems over *lossy channels*, i.e. channels that may nondeterministically lose messages, is decidable[2][7]. Channels systems need not only represent communication protocols, but may also be used to described other types of programs, such as cache coherence protocols and sensor systems[23].

Inspired by [1], I explore the possibility of using abstract interpretation techniques and small models for systems with unbounded buffers, keeping the

number of programs constant. We developed a verification technique for this purpose and the resulting model was implemented and tested.

**Reading this paper** Section 2 introduces some of the terminology and notation used in this paper, whereas section 3 contains formal definitions to some of the key concepts – these are previously known concepts, asides from their adaption to the specific context of this thesis. Section 5 introduces the concepts of small models and abstract interpretation, and relates these to buffer channels to create the theoretical model for this paper. Section 6 introduces some extensions to this model, allowing for a wider variety of modeling scenarios. In section 7, some abstractions and techniques are explained that allow for an efficient implementation of the verification algorithm. Further a protocol specification language is explained, that allows a user to define and use the verification tool without knowledge of the intricacies of the internal model. The results of the verifier when applied to a number of well-known communication algorithms is presented in section 8, as well as some comparisons against the results of other verification tools.

## 2 Notation and Terminology

In this chapter I define some of the notation and terminology used in the paper. Readers familiar with model checking terminology may want to skip this chapter.

### General Terminology

- **Model checking** is the act of verifying the correctness of a system with regard to its specification. In some literature, the term is used to denote *temporal model checking* – here it is used as a more general term.
- A **transition system** is related to the concept of finite state automata, but do not need to have a finite number of states and transitions. A transition system also has an initial state and a set of end states.

### Transition systems

- A **state** is commonly used to denote the state of an FSM. In this paper, we do not reason about particular FSMs, but only the joint behaviour of several FSMs. State is here used in the meaning **global state** or equivalently **control state**.
- With **evaluation** we refer to the state of all the channels in a system, and use  $\xi$  to denote an evaluation. We use  $\xi(ch)$  to denote the content of the channel  $ch$  of a system. The content of a specific channel is called a **word**.
- A **configuration** is used to denote a specific combination of global state and channel evaluation of a channel transition system.

### Miscellaneous

- The **Upward closure**  $U$  of a partially ordered set  $(S, \preceq)$  is the subset such that for any  $x \in U$  and  $x \preceq y$  then  $y \in U$ .

### 3 Model

Before formally defining a channel system, we present a simple protocol, the *alternating bit protocol*. This protocol will continuously serve to exemplify the theoretical concepts in this section in a practical setting. The formal definition below is associated to systems operating on FIFO buffers, other types of systems are covered in section 6.

**Alternating Bit Protocol.** The Alternating Bit Protocol (ABP) is a distributed protocol for transmitting data from a *sender* to a *receiver* in a network. The protocol uses two unbounded channels,  $ch_M$  used to transmit messages and  $ch_A$  to transmit *acknowledgements* of received messages. The sender sends a message with sequence number  $x \in \{0,1\}$  to the receiver over channel  $ch_M$ , who upon reception sends an acknowledgement with the same sequence number over channel  $ch_A$ . Both the sender and the receiver may send the same message (with the same sequence number) repeatedly. When the sender receives an acknowledgement from the receiver, the next message can be sent using the sequence number  $1-x$  (thus the name Alternating Bit Protocol).

This is a simple protocol that operates on unbounded channels. The behaviour of the sender and receiver process is illustrated in figure 1.

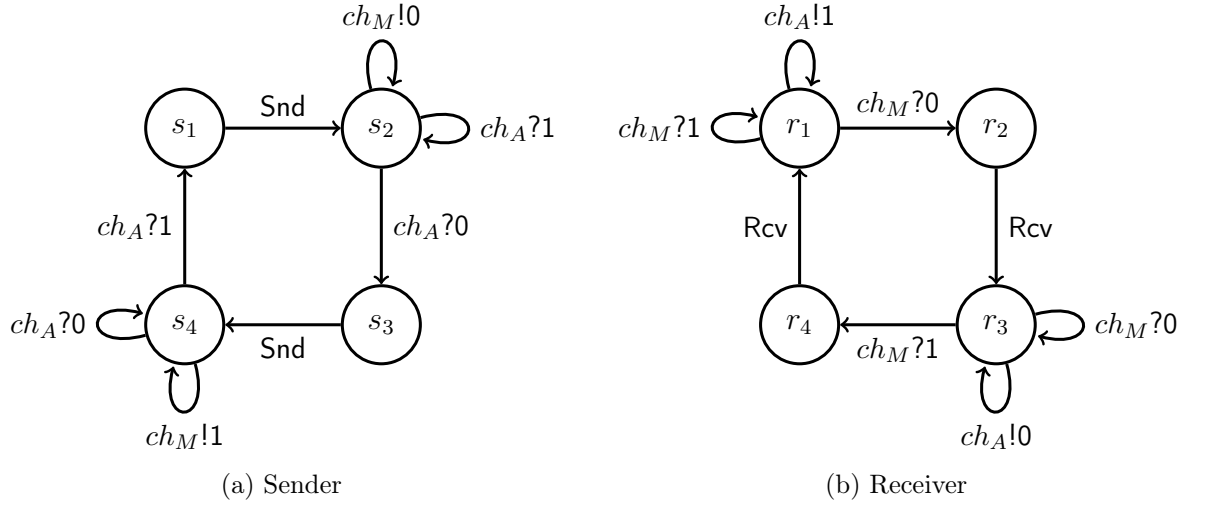


Figure 1: Program graphs of sender and receiver in the ABP protocol.

#### 3.1 Channel Systems

We present here the basic definition of a finite-state system with unbounded channels. Such a system can be seen as to having two parts, a *control part* and a *channel part*. The channel part is a set of channels, which may be empty or contain a sequence of messages, a *word*. The control part is a labeled finite-state transition system.

**Definition** Formally, a channel system  $CS$  over a set of processes  $P$  and channels  $Ch$  is a tuple  $\langle S, s_0, A, C, M, \delta \rangle$ , where

$S$  is a finite set of control states,

$s_0$  is an initial control state,

$A$  is a finite set of actions,

$Ch$  is a finite set of channels,

$M$  is a finite set of messages,

$\delta$  is a finite set of transitions, each of which is a triple of the form  $\langle s_1, op, s_2 \rangle$ , where  $s_1$  and  $s_2$  are control states, and  $op$  is a label of one of the forms

- $c!m$ , where  $c \in Ch$  and  $m \in M$
- $c?m$ , where  $c \in Ch$  and  $m \in M$
- $a \in A$ .

The finite-state control part of  $CS$  is an ordinary labeled transition system with states  $S$ , initial state  $s_0$  and transitions  $\delta$ . The channel part is represented by the set  $Ch$  of channels, which may contain a string of messages in  $M$ . The set  $A$  denotes the set of observable interactions with the environment, whereas  $\delta$  may either perform an action from  $A$ , or and unobservable action, where

$\langle s_1, c!m, s_2 \rangle$  represents a change of state from  $s_1$  to  $s_2$  while appending the message  $m$  to the tail of channel  $c$

$\langle s_1, c?m, s_2 \rangle$  represents a change of state from  $s_1$  to  $s_2$  while removing the message  $m$  to the head of channel  $c$

**Example.** The alternating bit protocol can be described by a channel system  $CS = \langle S, i, A, Ch, M, \delta \rangle$  such that  $S = \{(s, r)\}$  with  $s \in \{s_1, s_2, s_3, s_4\}$ ,  $r \in \{r_1, r_2, r_3, r_4\}$ ,  $i$  is the initial state  $(s_1, r_1)$ ,  $A = \{Snd, Rcv\}$ ,  $Ch = \{Ch_M, Ch_A\}$ ,  $M = \{1, 0\}$  and delta is the set of transitions

$\langle s_1, Snd, s_2 \rangle$	$\langle r_1, ch!1, r_1 \rangle$
$\langle s_2, ch!0, s_2 \rangle$	$\langle r_1, ch?1, r_1 \rangle$
$\langle s_2, ch?1, s_2 \rangle$	$\langle r_1, ch?0, r_2 \rangle$
$\langle s_2, ch?0, s_3 \rangle$	$\langle r_2, Rcv, r_3 \rangle$
$\langle s_3, Snd, s_4 \rangle$	$\langle r_3, ch!0, r_3 \rangle$
$\langle s_4, ch!1, s_4 \rangle$	$\langle r_3, ch?0, r_3 \rangle$
$\langle s_4, ch?0, s_4 \rangle$	$\langle r_3, ch?1, r_4 \rangle$
$\langle s_4, ch?1, s_1 \rangle$	$\langle r_4, Rcv, r_1 \rangle$



### 3.2 Channel Transition Systems

A *transition system* is an abstract machine, commonly used in model checking to describe the behaviour of a system. They are in ways similar to the notion of finite state automata, with the difference that the states and transitions in a transition system need not be finite. A state of a transition system describing a program may be determined, for example, the evaluation of all variables in the program. Transitions describe how a system in a certain state can move to another state.

**Definition** The operational behaviour of  $CS$  is defined by the infinite-state transition system  $TS = (C, \rightarrow)$  where

$C = (S \times \xi)$  is the set of its configurations, where  $\xi$  is an evaluation of the set of channels  $C$  in  $CS$

$\rightarrow \subseteq (S \times S)$  contains the following transitions

- For each observable action  $a \in A$  in  $CS$

$$\frac{s \xrightarrow{a} s'}{(S, \xi) \rightarrow (S', \xi)}$$

- For each transmission action  $\langle s_1, ch!m, s_2 \rangle$  in  $CS$

$$\frac{s \xrightarrow{ch!m} s' \wedge ch \in \xi}{(S, \xi) \rightarrow (S', \xi')}$$

with

$$\xi' = \xi[ch := \xi(ch) \bullet m].$$

- For each reception action  $\langle s_1, ch?m, s_2 \rangle$  in  $CS$

$$\frac{s \xrightarrow{ch?m} s' \wedge \xi(ch) = m \bullet w_1..w_n}{(S, \xi) \rightarrow (S', \xi')}$$

with

$$\xi' = \xi[ch := w_1..w_n].$$

At times we may use a notation for a configuration  $c$  with explicit processes and channels, so that  $c = \langle s_1, \dots, s_n, ch_1, \dots, ch_p \rangle$ , or alternatively, with explicit processes and channel evaluations,  $c = \langle s_1, \dots, s_n, \xi(ch_1), \dots, \xi(ch_p) \rangle$ .

**Example** Let  $c = \langle S, \xi \rangle$  be a configuration of the alternating bit protocol, with the channels containing the words 01 and 10 respectively. Then  $c$  may also be denoted as  $c = \langle s, r, ch_M, ch_A \rangle$  or as  $c = \langle s_1, s_2, 01, 10 \rangle$ . There are finitely many control states in this system, but an infinite set of channel evaluations. A transmission transition in this system is for example  $\langle \langle s_2, r_1, 01, 10 \rangle, ch_m!1, \langle s_2, r_1, 011, 10 \rangle \rangle$ .

### 3.3 Reachability and Bad Configurations

An instance of the *reachability problem* is defined by a channel transition system  $TS = \langle S, \xi \rangle$ , a set of initial configurations  $I \subseteq S^+$  and a set  $BAD \subseteq S^+$  of *bad configurations*. We assume that  $Bad$  is the upward closure  $\{c \mid c \in B : b \sqsubseteq c\}$  of a set of a given *finite* set of *minimal bad configurations*.

Let  $c$  denote a configuration, then  $c$  is said to be *reachable* in  $TS$ , if there are configurations  $c_1 \dots c_l$  such that  $c_0$  is an initial configuration of  $TS$  and for each  $0 \leq i < l$ ,  $\langle c_i, c_{i+1} \rangle \in \rightarrow$ .

We use  $\mathcal{R}$  to denote the set of reachable states. We say that the system  $TS$  is *safe* if there are no reachable bad configurations, i.e.  $\mathcal{R} \cap Bad = \emptyset$ .

Is  
this  
true  
in  
my  
case?

### 3.4 Traces

Suppose  $s_n$  is a bad state of a channel system  $CS$ . Then a *bad trace* is a sequence  $t = s_0 s_1 \dots s_n$  such that for each  $0 \leq i \leq (n - 1)$ ,  $\langle s_i, r, s_{i+1} \rangle \in \delta$ . If  $t$  is the shortest bad trace in the system, we call it a *minimal bad trace*.

## 4 Problem Formulation

In [1], the authors propose a verification method for *parameterized systems* and show that how they can, under certain assumptions, be verified for an unbounded number of processes. This project is based on the results of this work, and aims to adapt this method for systems working on unbounded channels. Formally defining a model for systems working on channels, and proving that such systems have a *small system property* allows us to verify their correctness by only looking at finite-state representations of the system.

The goal is further to implement the proposed verification method. For such an implementation to be useful, several extensions are proposed in order to expand the context in which the system can be used. Also, a specification language is defined with which the user can easily model problems. This type of verification generally has a high demand of computational resources, thus the efficiency of the implementation is of great importance. In order to establish correctness and evaluate the efficiency of the implementation, the method is used to model several well-known communication protocols, such as the alternating bit protocol and the sliding window protocol, in order to compare its efficiency against other verification methods and establish its correctness.

## 5 Abstract Interpretation

### 5.1 Subwords and Views

Let  $\sqsubseteq$  be the subword relation, then  $u \sqsubseteq s_1 \dots s_n = w$  iff  $u$  is an ordered subset of  $w$ . For example, if  $w = abc$ , then the set of subwords of  $w$  is  $abc, ab, bc, a, b, c$ .

We define the *views* of a configurations to be  $v'$  such that for  $c = \langle s, \xi \rangle$ ,  $v' = \langle s, \xi[ch \sqsubseteq \xi(ch)] | ch \in \xi \rangle$ . We define  $\text{size}(ch)$  to be equivalent to  $\text{size}(\xi(ch))$ , i.e. the length of the word on the channel  $ch$ . We define the size of a configuration or a view to equal the size of its longest channel.

**Example.** Suppose  $c$  is a configuration  $\langle s_1, s_2, ab, cd \rangle$ . The configuration is of size 2 and its views are

$$\begin{array}{ccccc} \langle s_1, s_2, ab, cd \rangle & \langle s_1, s_2, a, cd \rangle & \langle s_1, s_2, a, c \rangle & \langle s_1, s_2, a, d \rangle & \langle s_1, s_2, \epsilon, \epsilon \rangle \\ & \langle s_1, s_2, b, cd \rangle & \langle s_1, s_2, b, c \rangle & \langle s_1, s_2, b, d \rangle & \\ & \langle s_1, s_2, \epsilon, cd \rangle & \langle s_1, s_2, \epsilon, c \rangle & \langle s_1, s_2, \epsilon, d \rangle & \end{array}$$

### 5.2 Abstractions and Concretizations

The abstraction function  $\alpha_k : C \rightarrow 2^{C_k}$  maps a configuration  $c$  into the set  $V$  of views of size up to  $k$ , such that for each  $v \in V$ ,  $\{v \sqsubseteq c\}$ .

The concretization function  $\gamma_k : 2^{C_k} \rightarrow 2^C$  returns, given a set of views  $V$ , the set of configurations that can be reconstructed from the views in  $V$ , in other words,  $\gamma_c(V) = \{c \in C \mid \alpha_k(c) \subseteq V\}$

For a set  $V$ , we define the *post-image* of  $V$ ,  $\text{post}(V) = \{c' \mid c \rightarrow c' \wedge c \in V\}$ . The *abstract post-image* of a set  $V \in C_k$  is defined as  $A\text{post}_k(V) = \alpha_k(\text{post}(\gamma_k(V)))$ . In general,  $\gamma_k$  is an infinite set of states. We show (5.3) that we only need to consider those configurations, whose sizes are up to  $k+1$ , i.e. a finite set of configurations. We define  $\gamma_k^l(V) := \gamma_k(V) \cap C_l$  for some  $l \geq 0$ . The intuitive meaning of  $\gamma_k^l(V)$  is the set of  $l$ -size configurations for which all views of length at most  $k$  are in  $V$ .

### 5.3 Small Model Property

The property that allows us to verify infinite-state problems, is that transitions have *small preconditions*, expressed formally by the following lemma.

**Lemma 1.** For any  $k \in \mathbb{N}$ , and  $X \subseteq C_k$ ,  $\alpha_k(\text{post}(\gamma_k(X))) \cup X = \alpha_k(\text{post}(\gamma_k^{k+1}(X))) \cup X$ .

We will show that for any configuration  $c \in \gamma_k(V)$  of size  $m > k+1$  such that there is a  $c'$  induced by a transmission rule  $r \in \rightarrow$  from  $c$ , then for each  $v' \in \alpha_k(c')$ , the following holds: There is a configuration  $d \in \gamma_k(V)$  of size at most  $k+1$  with a transition  $d \xrightarrow{r} d'$  with  $v' \in \alpha_k(d')$ .

Is this really what we call the small model property?

Is this correct? Shouldn't it be the

### 5.3.1 Proofs

**Transmission rules** First we note, that for any configuration  $c \in V$ , any view  $v' \in \alpha_k(c)$  is also a valid configuration  $c' \in \gamma_k(V)$ , since  $\alpha_k(v') \subseteq \alpha_k(c)$  and thus  $v' \in \gamma_k^{k+1}(\alpha_k(c))$ . Also note that if from  $c$  a transition  $r$  can be fired, then this transition can also be fired from any configuration  $c' = v'$ , as transmission rules are guarded only by the states of the channel system and not by channel evaluations.

A transmission rule changes the evaluation of at most one channel  $ch \in c$ , and (possibly) the state of the channel system, thus we need only reason about the evaluations of a single channel  $ch$ . Let  $c = \langle S, w \rangle \xrightarrow{ch!w_{m+1}} \langle S', w \bullet m \rangle = c'$ .

The views of  $c'$  of size up to  $k$  are either of the type 1)  $\langle S', w' \sqsubseteq w \rangle$ , with  $\text{size}(w') \leq k$  (i.e. not including the newly transmitted message) or 2) of the form  $\langle S', w' \bullet m | w' \sqsubseteq w \rangle$  with  $\text{size}(w') < k$ .

For any view of type 1, there exists a configuration of size  $k$ ,  $d = \langle S, w' \rangle \in \alpha_k c$  and the transition  $r$  can be taken, resulting in  $d' = \langle S, w' \bullet m \rangle$  of size  $k+1$ . The view  $v' \in \alpha_k w'$ .

For any view of type 2, there exists a configuration of size  $k-1$ ,  $d = \langle S, w' \rangle$  and the transition  $r$  can be taken resulting in  $d' = \langle S, w' \bullet m \rangle = v'$ .

*Example.* Assume a system with two processes and a single channel. Let  $c = \langle 1, 2, abc \rangle \rightarrow ch!d \langle 2, 2, abcd \rangle$ . Assume that  $c \in \gamma_2(V)$ , then  $\alpha_2(c) \in V$ , i.e.  $\langle 1, 2, a \rangle, \langle 1, 2, b \rangle, \langle 1, 2, c \rangle, \langle 1, 2, ab \rangle, \langle 1, 2, bc \rangle, \langle 1, 2, ac \rangle$  are in  $V$  and also in  $\gamma_k(V)$ .

$\alpha_2(c') = \{ \langle 2, 2, a \rangle, \langle 2, 2, b \rangle, \langle 2, 2, c \rangle, \langle 2, 2, d \rangle, \langle 2, 2, ab \rangle, \langle 2, 2, bc \rangle, \langle 2, 2, cd \rangle, \langle 2, 2, ac \rangle, \langle 2, 2, ad \rangle, \langle 2, 2, bd \rangle \}$ . Consider a view with the newly transmitted message,  $\langle 2, 2, cd \rangle$ , it can be created by  $\langle 1, 2, c \rangle \rightarrow ch!d \langle 2, 2, cd \rangle$ . Considering instead a view without the transmitted message,  $\langle 1, 2, ab \rangle$ , it can be created by  $\langle 1, 2, ab \rangle \rightarrow \langle 2, 2, abd \rangle$  for which  $\langle 2, 2, ab \rangle$  is a view.

**Reception rules** As opposed to the transmission rules, reception rules also rely on the state of the channel in order to be fired, but only the state of that channel need be considered. Consider  $c = \langle S, m \bullet w \rangle \xrightarrow{ch?m} \langle S, w \rangle$ . For any view  $v' \in \alpha_k(c')$  with the word  $w'$  of size at most  $k$  on the channel, there exists a configuration of size at most  $k+1$ ,  $d = \langle S, m \bullet w' \rangle \in \alpha_k(c)$  such that  $d \xrightarrow{ch?m} d' = v'$ .

**Actions** Actions can in this context be seen as equivalent to a reception rule, reading the empty symbol  $\epsilon$  on some channel. The proof then follows directly from 5.3.1.

Why  
is  
that  
so?

## 6 Extensions

There are several ways the channel system and the channel transition system in 3.1 and 3.2 could be extended, in order to cope with a wider scope of application scenarios. For example, we may want to model a protocol working on LIFO buffers, rather than the FIFO buffers described above. Another context may be that of a protocol communicating over an unreliable channel, introducing the possibility of *message loss* on the channels. In this section, we shall create models for both of these scenarios. Doing this requires us to first adapt the channel system model and the corresponding channel transition system by adding appropriate transition rules and action, and second to prove that 1 holds for these models.

### 6.1 LIFO Channels

**Stack Channel System** In order to model a LIFO channel or a *stack*, we need only modify one of the transitions of the system described in 3.1 in such a way that transmissions and reception transitions append and delete messages on the same end of the channels. For simplicity, we only restate the parts of the channel system affected by these changes, all other parts of the system remain unchanged. The finite-state control part of  $CS$  is an ordinary labeled transition system with states  $S$ , initial state  $s_0$  and transitions  $\delta$ . The channel part is represented by the set  $Ch$  of channels, which may contain a string of messages in  $M$ . The set  $A$  denotes the set of observable interactions with the environment, whereas  $\delta$  may either perform an action from  $A$ , or an unobservable action, where

$\langle s_1, c!m, s_2 \rangle$  represents a change of state from  $s_1$  to  $s_2$  while appending the message  $m$  to the **head** of channel  $c$

$\langle s_1, c?m, s_2 \rangle$  represents a change of state from  $s_1$  to  $s_2$  while removing the message  $m$  to the **head** of channel  $c$

**Stack Channel Transmission System** In order to describe the transition system induced by a Channel  $CS$ , we need only modify the transition rules of 3.2 so that they reflect the changes made in 6.1. Leaving the rest of the model unchanged, we restate the definitions of the transition relations (from which only the transmission transition is changed). This results in  $\rightarrow \subseteq (S \times S)$  containing the additional transitions

- For each observable action  $a \in A$  in  $CS$

$$\frac{s \xrightarrow{a} s'}{(S, \xi) \rightarrow (S', \xi)}$$

- For each transmission action  $\langle s_1, ch!m, s_2 \rangle$  in  $CS$

$$\frac{s \xrightarrow{ch!m} s' \wedge ch \in \xi}{(S, \xi) \rightarrow (S', \xi')}$$

with

$$\xi' = \xi[ch := m \bullet \xi(ch)].$$

- For each reception action  $\langle s_1, ch?m, s_2 \rangle$  in CS

$$\frac{s \xrightarrow{ch?m} s' \wedge \xi(ch) = m \bullet w_1..w_n}{(S, \xi) \rightarrow (S', \xi')}$$

with

$$\xi' = \xi[ch := w_1..w_n].$$

**Proof of Lemma 1** Only the part of the proof of lemma 1 regarding transmission rules is affected by the changes made to this system. Such a proof follows in a straightforward manner from the proof 5.3.1, by considering configurations of the form  $\langle S, m \bullet w' \rangle$  rather than  $\langle S, w' \bullet m \rangle$ .

## 6.2 Lossy Channels

A lossy channel system is a system similar to 3.1, with the difference that the messages on channels may be lost. In practice, data loss may appear in several contexts, e.g. data corruption, inconsistencies on weak memory models or message loss during data transmission over a network.

**Lossy Channel Systems** A lossy channel system is described by 3.1 with an additional transition  $\langle s, ch*, s \rangle$  such that  $\xi(ch) = w_1w_2..w_l \rightarrow w_1..w_{i-1}w_{i+1}..w_l$  for some  $0 \leq i \leq l$ .

**Lossy Channel Transition Systems** A lossy channel transition system TS is described by 3.2 with an additional transition rule

$$\frac{s \xrightarrow{ch*} s \wedge \xi(ch) = w_1..w_{p-1} \bullet m \bullet w_{p+1}..w_n}{(S, \xi) \rightarrow (S, \xi')}$$

with

$$\xi' = \xi[ch := w_1..w_n].$$

**Extended Proof of Lemma 1** Consider a configuration  $c'$  such that  $c \xrightarrow{r} c'$ , where  $r$  is a channel loss transition, as described above. Then one channel  $ch$  in  $c$  of length  $n \leq k$ ,  $\xi(ch) = w_1..w_{p-1} \bullet m \bullet w_{p+1}..w_n$  loses the symbol  $m$ , resulting in the channel evaluation  $\xi(ch') = w_1..w_n$  in  $c'$ .

Since  $c'$  is also a view of  $c$ ,  $c \in V$ , it follows that the proofs as presented in 5.3 hold also for the lossy channel transition system.

### 6.3 Channel Systems with Synchronization

It is not uncommon that distributed programs rely on *synchronization* in their program behaviour. With synchronization, we mean that two or more programs take a joint step, i.e. a synchronization transition cannot be taken unless all programs affected by it take the transition simultaneously. This is particularly common in parallel programs, which may perform independent calculations but occasionally rendezvous and synchronize. As we shall see, 2, synchronization can also be used as a modelling technique even if the program being modelled does not synchronize.


A channel system is in a sense the interleaving of multiple *program graphs*. When operating such a level of detail, a synchronization action with a label  $l$  corresponds to an action that cannot be taken, unless each program where such an action is present take the action simultaneously.

As the working model in this paper, i.e. the channel system described in 3.1 and the corresponding transition system, have a higher level of abstraction, they have the mechanisms needed in order to model synchronizing programs. In essence, synchronizing and non-synchronizing actions are the same at this level of abstraction and cannot be differentiated.

### 6.4 Alternating Bit Protocol Revised

The alternating bit protocol is a protocol designed to be resistant to message loss, therefore it is reasonable to model it using a lossy model. The transition system induced by the program graphs 1 does not provide an intuitive way to describe a set *Bad* of bad states. This can easily be overcome by introducing an *observer* program, which synchronizes with the sender and receiver.

Figure 2: An observer machine which takes synchronized transitions with the sender and the receiver.

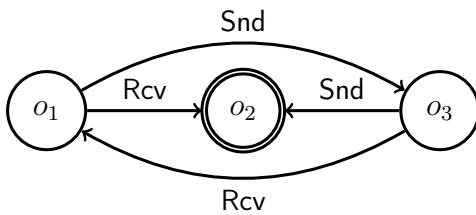

The observer synchronizes with the sender over transitions with the label *Snd* and with the receiver over *Rcv*. If either the sender performs two transmissions (with different sequence numbers) without the receiver having received in between, or if the receiver receives two messages without the sender having transmitted in between, the observer would reach its accepting state  $o_3$ . This state can therefore be considered to be a minimal bad state, and any configurations describing a system with the observer in its bad state is a bad configuration.



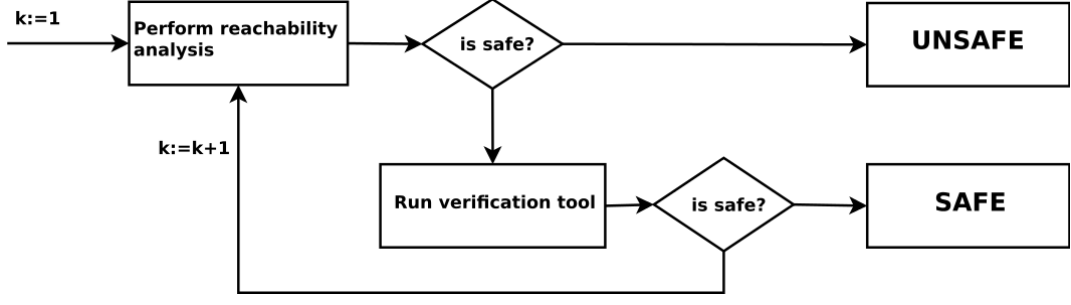


Figure 3: The general flow of the verifier.

## 7 Implementation of the Verification Method

As a result of lemma 1, if  $\gamma_k^{k+1} \cap Bad = \emptyset$  for any  $k \geq 1$ , then  $\gamma_k(V) \cap Bad = \emptyset$  for any buffer size larger than  $k$ . Given a set of bad states  $Bad$ , a set of initial states  $I$  and a set of transitions, Verification of a system can be done with algorithm 1, which was first presented in [1].

---

### Algorithm 1 General Verification algorithm

---

```

1: for  $True$  do
2:   if  $\mathcal{R}_k \cap Bad \neq \emptyset$  then
3:     return Unsafe
4:   end if
5:    $V := \mu X. \alpha_k(I) \cup Apost_k(X)$ 
6:   if  $\gamma_k(V) \cap Bad = \emptyset$  then
7:     return Safe
8:   end if
9:    $k := k+1$ 
10: end for

```

---

The algorithm begins by performing a reachability analysis in order to compute  $\mathcal{R}_k$  and check for bad states. For any buffer size  $k$ , if a bad state is found to be reachable in  $\mathcal{R}_k$ , the system is unsafe and the algorithm terminates. If no such bad state was found, the algorithm continues by computing an *overapproximation* of configurations of size  $k$ , reachable through configurations of size at most  $k+1$  and checking for bad configurations. This is done by computing  $Apost_k$  iteratively until a fixpoint  $V$  is reached. If at this point no bad configuration has been found, the system can be said to be safe (due to the result of 1) and the algorithm terminates. If on the other hand a bad state was found, the system is not necessarily unsafe, as  $V$  is an over-approximation of the reachable states in  $\mathcal{R}_k$ , the process is repeated with a buffer size of  $k+1$ . This process is abstractly described in the flowchart in figure 3.

In this rest of this section, we show how to implement this algorithm in an efficient way. We do this by beginning with a naive algorithm computing the configurations, and then step by step locating and addressing the performance issues.

Is  
the  
al-  
gorith  
guar-  
an-  
teed  
to

## 7.1 Naive implementation

A naive way to generate configurations would be to perform the described operations such that they correspond directly to the mathematical notations as described in section 5.2. This is possible, as most programming languages have built-in datastructures that support set operations.

A transition in the transition system corresponds to one or more *rules* in the implementation. A rule  $r \in R$  is a description of a transition, seen as a set of state-predicates, channel-predicates, state-effects and channel-effects. If all predicates are true for a configuration  $c$ , the effects of the rule are applied to  $c$  resulting in a post-value  $c'$ .

In this naive approach, all configurations are stored in a *set*, such that each configuration is stored uniquely. For each element  $c$  of the set  $V$ , the function *gamma*, *step* and *alpha* are performed in order, until a *fix-point* is reached, i.e. continuing the process does not result in any more configurations being found. Assuming that a set of channel symbols and a set of rules  $R$  describing the transitions are known, the algorithm does the following:

1. Generate a set  $\Gamma(V)$ : For each configurations  $c \in V$ , generate all potential concretizations  $con$  such that  $|con| = |c|+1$ . For any such potential concretization  $con$ , remove those for which  $\alpha_k(c') \notin V$ .
2. Generate the  $post(V)$ : For every  $con \in \Gamma(V)$ ,  $r \in R$ , compute  $r(con)$ .
3. Generate  $Apost(V)$ : For each element  $p \in post(V)$ , compute its views of size  $k$ . If  $V' \cup V = V$ , a fixpoint has been reached, otherwise the processes repeats with  $V := V \cup V'$ .

The bottle-neck in this algorithm lies in *gamma*. It first creates all potential concretizations of a configuration  $c$ , i.e. all combinations of channel evaluations where at least one of the channels is of a larger size than in  $c$ . Additionally, for each of these, all their views must be computed in order to determine whether the concretization should be refuted or not. Although this method is correct, there is significant overlap of concretizations; it is often possible to create the same concretization  $con$  in several ways, and each time,  $\alpha_k con$ ,  $post(con)$  and  $Apost(con)$  need be performed. In the next section, we show abstractions of the functions *alpha* and *gamma* that are less computationally expensive.

## 7.2 Improving the Implementation

We look closer at  $\gamma$ , in order to address the issues mentioned above. We show that all concretizations can be found, while considering only a subset of the potential concretizations. Furthermore, it is possible to determine whether a concretization should be accepted or not, examining only a subset of its views.

**Abstracting the Concretizations.** Given a configuration  $c$ , with channel evaluations  $\xi$  such that all channels have size smaller or equal to  $k$ , a potential

concretization of  $c$  is any configuration  $con$  such that  $con$  can be created from  $c$  by appending a symbol to at least one of the channels of  $c$ . As this is a large number of potential configurations, it is desirable to consider only a subset thereof, while still ensuring that all valid concretizations are eventually found.

We show that it is sufficient to in each iteration consider only the potential concretizations of  $c$ , for which only one channel has been modified, and only modifications where a symbol has been added at the **end** (or alternatively the beginning) of a channel.

Consider a potential concretization  $con$  of  $c$ , where  $n$  channels have been extended by a symbol. If such a potential concretization is valid, any evaluation where  $n' < n$  channels have been modified in a similar way will also be a valid concretization. Therefore,  $con$  will eventually be considered also when only one channel is extended in each iteration, but more iterations are required in order to find it.

As an example, consider a concretization with channel evaluation  $e = w_1..w_l$ , created by extending some configuration with a single symbol, not necessarily at the end of the channel. If  $con$  is a valid concretization, then a configuration  $c'$  must be in  $V$  such that  $c'$  has the channel evaluation  $w_1..w_{l-1}$ , since  $c' \in \alpha_k(con)$ . This channel evaluation can be extended to  $con$  by adding the symbol  $w_l$  at the end of the channel.

This shows that any valid concretization will eventually be created, even if only a subset of potential concretizations are created in each iteration. This result highly reduces the number of potential concretizations inspected. If  $s = |\text{symbols}|$ ,  $t$  is the number of channels and  $n = |V|$ , the naive method creates  $O(n * (s^k)^t)$  potential concretizations in each iteration. Using this abstraction, the number of potential concretizations is reduced to  $O(n * s * t)$ .

**Reducing the views.** Suppose we want to determine whether  $c \in \gamma_k(V)$  given a configuration  $c$  and a set  $V$ . This would require that all views  $v \in \alpha_k(c)$  are in  $V$ . Consider a view  $v = \langle S, \xi(ch) = w \rangle$  with  $\text{size}(w) = k$ ; if  $v \in V$  then necessarily, any  $v' = \langle S, \xi(ch) = w' \rangle$  with  $w' \sqsubseteq w \in V$ . Consequently, it is sufficient to assure that all configurations  $c = \langle S, \xi(ch_i) = w_i \rangle$  are in  $V$ , with

- $\text{size}(w_i) = k$  if  $\text{size}(\xi(ch)) \geq k$
- $\text{size}(w_i) = \text{size}(\xi(ch))$  if  $\text{size}(\xi(ch)) < k$ .

**Example.** Suppose we want to determine whether the potential concretization  $con = \langle S, abc, de \rangle$  is an element of  $\gamma_2$ . It is then sufficient to check that  $c_1 = \langle S, ab, de \rangle$  and  $c_2 = \langle S, bc, de \rangle$  are in  $V$ . The potential concretization must have been created from either  $c_1$  or  $c_2$ . Because of this, it is always sufficient to check for the existence of a single configuration, to determine whether  $con$  should be accepted.

Using these abstraction, the computational complexity of the verifier is greatly reduced, but there are yet several ways to optimize the procedure. The

bottle-neck with the procedure at its current state is the choice of a *Set* as lone data structure to store configurations. We expect the number of configurations to grow rather large, due to state-space explotion which cannot be avoided automatically (in certain cases, it could be reduced by further abstraction of the model under testing or by removing unnecessary redundancy in the model). Assuming the *Set* is ordered, inserting an element to the set and finding an element in the set is done in  $O(\log n)$  where  $n$  is the number of elements in the set. As a consequence, the function *alpha* which determines whether the views of a certain configuration are in the set has complexity  $O(p \cdot \log n)$  where  $p = |\alpha_k(c)|$ . We observe that by definition, a view (and a configuration) is of type  $(S \times \xi)$ . For any configuration  $c = \langle s \rangle \xi$ , it's views will be of the type  $\langle s \rangle \xi'$ , i.e., the configuration and its views have identical control-parts. It is therefore reasonable to divide the single *Set* into a Set of *Sets*, where each *Set* corresponds to a specific control-state. With such a division, it is sufficient to check whether the views of a configuration reside in the *Set* that corresponds to its control-state.

In a best-case scenario, there would be an equal number of configurations for every state in the system. The complexity of checking whether  $\alpha_k(c) \in V$  is reduced to  $O(p \cdot \log(n/s))$  where  $s$  denotes the number of states in the system. The gains of these modifications in terms of computational complexity is difficult to determine, as the number of configurations with a certain control-state are not necessarily well-distributed, but we anticipate that the gains in many cases will be close to the best case scenario.

## 7.3 Better Implementation

### 7.3.1 Control-State Partitioning

Above it was suggested that the set  $V$  could be divided into several sets, distinguished by control-states. The number of control-states in a system is finite and unique; For a system with  $n$  processes, the number of states is  $\prod_{i=1}^n |p_i|$ . This makes it possible to partition the set of configurations into several smaller disjoint sets, such that all configurations in a set have equal control-state. These sets can be stored in a hashmap indexed by control-state.

### 7.3.2 Advantages of Partitioning

Using this partitioning, each node in the hashmap is a *Set* with equal-state configurations, addressed by the common control-state. Compared to the previous solution, this leads to a speed-up when inserting, retrieving and looking for the existence of elements in the sets, as the size of the sets will be smaller than before. Retrieving and inserting nodes into the hashmap is done in constant time in practice (the number of elements will be static, avoiding the need of resizing the hashmap).

Having partitioned the configurations, consider the act of applying a rule in order to create a new configuration. Recall that any rule has a state-predicate,

a channel-predicate, a state-event and a channel-event. If the predicates are fulfilled, a new configuration can be created by applying the events to the current configuration.

By organizing the set of *rules* or transitions in a similar way in a hashmap of rules, we can ensure that the state-predicate is fulfilled without specifically testing for it. A state-predicate is a (possible empty) predicate on the states of the processes in the system, requiring that one or more processes are in a specific state. It is therefore possible to generate a static hashmap of rules, addressed again by control-states.

Considering a transition  $t_2$  with no requirements on any processes, the state-predicate will be fulfilled by any configuration, thus a corresponding rule is created in every node of the tree. Consider then instead a transition  $t_2$  with requirements on all the processes in the system, i.e. there is only one valid control-state. Such a transition corresponds to a single rule in the node addressed by that control-state. Last, consider a transition  $t_3$  with requirements on a true subset of the processes in the system, then the transition can be taken from a number of control-states. These control states can be generated, and the transition will correspond to a set of rules in the nodes corresponding to those control-states.

**Example.** Consider yet again the alternating bit protocol, as described in 2. The system has three processes *Sender*, *Receiver* and *Observer* with 4, 4 and 3 states respectively. Consider then the transition with the predicates that the sender is in state 3, the observer in state 3 and they may take the synchronized transition with the action *Snd* to states 4 and 2 respectively. This transition has no requirements on the receiver, thus it corresponds to four rules,  $(3,1,3) \rightarrow (4,1,2)$ ,  $(3,2,3) \rightarrow (4,2,2)$ ,  $(3,3,3) \rightarrow (4,3,2)$ ,  $(3,4,3) \rightarrow (4,4,2)$ . These rules are inserted in the nodes  $(3,1,3)$ ,  $(3,2,3)$ ,  $(3,3,3)$  and  $(3,4,3)$ .

There is a small one-time cost of creating the rule tree, but after creation, it is highly effective. The division by itself ensures that the state-predicate is fulfilled, if not, we never even attempt to apply the rule to a configuration. We illustrate this in figure 4

## 7.4 Final Implementation

An efficient algorithm in this context is largely an algorithm that avoids performing unnecessary calculations. This can either be done by avoiding to create unnecessary configurations such as was done with the rule hashmap above or by avoiding re-calculating previously calculated results. The algorithm as described above reproduces its steps each iteration; if a configuration  $c$  can be extended to a concretization  $con$  at any point in the verification process, then  $con$  can and will be created in every following iteration. This includes checking whether  $\alpha_k(con) \subset V$ , applying a set of rules to the configuration and then adding all the views of the resulting configurations to the set. Each time the calculations are performed, the result will be duplicates and no new views are added to the system.

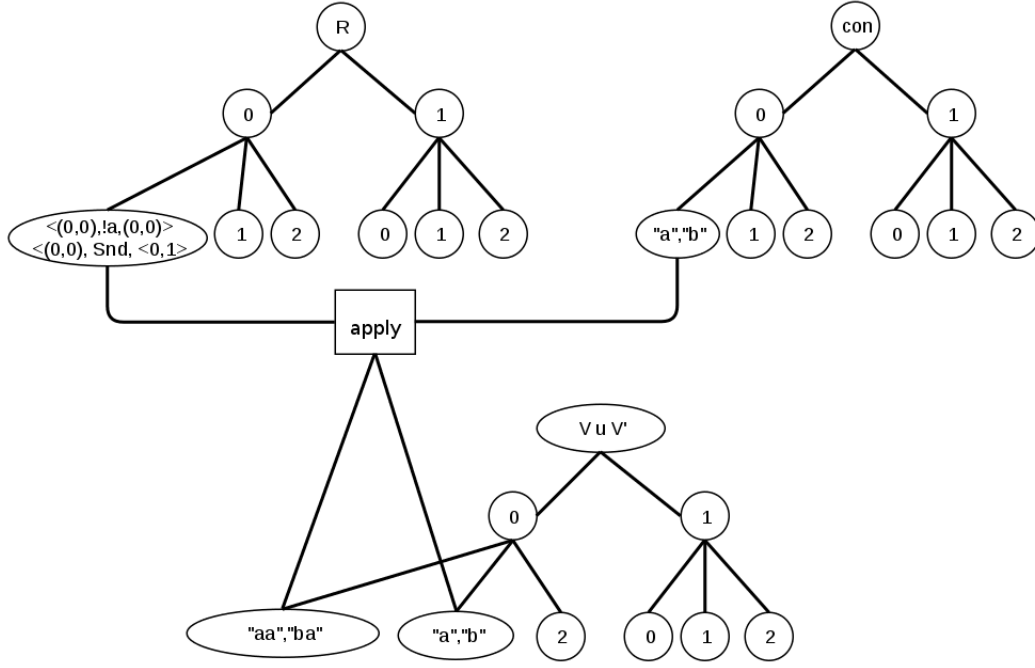


Figure 4: This picture shows the process of applying rules. For each control-state, each rules with that state are applied on each configuration with the same state. This will generate new configurations, not necessarily with the same control-state. This is visualized in a tree, rather than a hashmap, only since hashmap are less intuitive to draw.

We solve this by maintaining another hashmap, *seen*, of configurations in parallel, containing exactly those concretization that have been accepted. If a configuration  $c$  can be extended to the concretization  $con$ , then we first check if  $con$  is an element of *seen*. If it is, we discard  $con$ , otherwise we add  $con$  to *seen* and also to the set of concretizations to be evaluated in this iteration.

Yet another source of repetition is the fact that there are multiple ways to create the same channel evaluations. Therefore, after a rule has been applied to a concretization, it may result in a configuration already in the set. Instead of performing the costly  $\alpha$ -calculation, we first check if the newly created configuration is not in fact a duplicate by checking if it is already in  $V$ . If so, the configuration can again be discarded.

The final algorithm amounts to the following pseudo-code representation:

## 7.5 Reachability Analysis

An important step of the verification process which has yet to be covered is that of performing a reachability analysis, in order to find bad states, if any such states are reachable and find a minimal bad trace leading up to the bad state. See sections 3.3 and 3.4 for formal definitions of bad states and traces respectively.

Below, a simple technique of finding a minimal bad trace is presented,

---

**Algorithm 2** The verification algorithm from section 1 in somewhat higher detail. This version includes

---

```

1: Gamma (V, Seen):
2:    $\text{con}' := \text{concretizations}(\text{V})$ 
3:    $\text{con} := c \mid c \in \text{con} \wedge c \notin \text{Seen}$ 
4:
5: Step (Con, Rules):
6: for  $\text{state} \in \text{nodes}(\text{V})$  do
7:    $S := r(c) \mid \forall c \in \text{con}(\text{state}) \wedge \forall r \in \text{Rules}(\text{state})$ 
8: end for
9:
10: Alpha (V, S):
11:    $V := V \cup \text{views}(C)$ 
12:
13: Verifier (V, Rules, Bad):
14: for True do
15:   if  $\mathcal{R}_k \cap \text{Bad} \neq \emptyset$  then
16:     return Unsafe
17:   end if
18:    $V := \mu\text{Alpha}(\text{Step}(\text{Gamma}(V)))$ 
19:   if  $\gamma_k(V) \cap \text{Bad} = \emptyset$  then
20:     return Safe
21:   end if
22:    $k := k+1$ 
23: end for

```

---

accompanied with a proof that the trace is in fact minimal.

**Finding Minimal Traces** When running the verification, if a bad state is found we want to produce a trace leading up to the bad state. Preferably, this would be a minimal trace that leads to the bad state.

The proposed verification method generates a finite set of reachable states (nodes in this context), but it does not record the available transitions between the nodes (i.e. the edges). It is possible to for each node  $n$  to save all nodes  $n$  from which an edge to  $n'$  exists, and thus build the complete reachability graph of the problem. There exists efficient algorithms to solve such a problem, e.g. *dijkstra shortest path*, or even the shortest path between any two nodes, e.g. flow-network techniques. Although these algorithms are efficient, building the complete reachability graph would be costly in terms of memory space, as the number of edges may be much larger than the number of states.

We show that due to the method of iteratively constructing the graph, nodes are created in such a way, that if a node  $n_i$  created in the  $i$ :th iteration is reached by a node  $n_{i-1}$  over an edge  $e_{i-1}$ , the shortest path from the initial node  $n_0$  will necessarily be a path  $e_1 \dots e_{i-1}$ .

*Proof.* This is proven using an induction proof. We hypothesize that, if

at the point of creation of  $n_i$ , choosing the parent node  $n_{i-1}$  from which an edge  $e_{i-1}$  can be taken  $n_i$ , the path  $e_1..e_i$  will be the shortest path to  $n_i$  and has length  $i$ . Note that the node  $n_{i-1}$  must have been created in the previous iteration; had it been created earlier, the edge  $e_i$  could have been taken in a previous iteration, and so  $n_{i+1}$  would already be a node in the tree.

The base case is that for any node reachable from  $n_0$  over any edge  $e_0$ ,  $e_0$  will be the shortest path and has length 1. This is trivially true.

Now suppose a node  $n_{i+1}$  is reachable over an edge  $e_i$  from a node  $n_i$ , and the node  $n_{i+1}$  is not yet in the system. The induction hypothesis states that the path  $e_1..e_i$  is the shortest path leading up to  $n_i$ . If  $e_0..e_{i-1}e_i$  would not be the shortest path to  $n_{i+1}$ , there would be a path  $e'_0..e'_{k-1}$  to another node  $n_k$  with  $k < i$  from which  $n_{i+1}$  can be reached. But any such node would have been created in the  $k$ :th iteration of the algorithm, which would contradict the fact that the node  $n_{i+1}$  was not already in the system.

Having shown this, we need only record the information of a single parent of a node, in order to build up a tree from which the shortest path from  $n_0$  to any node in the system can efficiently be found.

## 7.6 Specification Language

In order for the verification algorithm to be easily used, a specification language is needed in which algorithms can be formally defined. We expect such a specification language to

- be expressive enough to express all algorithms that are in the scope of the verification program
- be independent of the internal representations of the verifier and to demand as little knowledge of the actual verification process as possible from the user
- to be as clear as possible in order to ensure that the model at hand in fact corresponds to the actual algorithm, the way it was intended

The specification language used is an adaption of previous works in [4]. The language simply uses XML to describe an algorithm. There are minor differences between the specification language used here, with respect to that used in by the MPass verification algorithm, and correspond to different expressivness of the models. More specifically, the MPass verifier allows for joint reception and transmission transitions, i.e. a single transition may read a message from a channel and write a message to a channel at the same time. On the other hand, it does not allow for synchronized transitions, this has therefore been added to the language.

### 7.6.1 Example

We return yet again to the Alternating Bit Protocol to exemplify the specification language. Bearing in mind the formal definition in section 3.1, a model needs a set of messages, channels, actions and transitions.



We begin by specifying a new protocol, it's name and that it is operating on FIFO buffers. We then specify a set of messages, a set of channels and a set of actions in a similar manner.

```

1 <protocol name="Alternating_Bit_Protocol" medium="FIFO">
2 <messages>
3   <message>ack0</message>
4   <message>ack1</message>
5   <message>mesg0</message>
6   <message>mesg1</message>
7 </messages>
8
9 <channels>
10  <channel>c1</channel>
11  <channel>c2</channel>
12 </channels>
13
14 <actions>
15  <action>Rcv</action>
16  <action>Snd</action>
17 </actions>

```

We then continue by defining the different processes in the system, i.e. the sender, receiver and observer. Such a process is defined by its states and its transitions. In the specification language, we differentiate between transitions over an action, and transitions that modify a channel. The latter type is called a *rule* in the specification language, in order to comply with the names used in the MPass specification language. This should not be confused with the word as used earlier in this section.

```

1 <role name="SENDER">
2   <states>
3     <state type="initial">Q0</state>
4     <state>Q1</state>
5     <state>Q2</state>
6     <state>Q3</state>
7   </states>
8   <action>
9     <current_state>Q0</current_state>
10    <type>Snd</type>
11    <next_state>Q1</next_state>
12  </action>
13  <rule>
14    <current_state>Q1</current_state>
15    <send_message>mesg0</send_message>
16    <next_state>Q1</next_state>
17    <channel>c1</channel>
18  </rule>

```

Last, we specify that the processes **SENDER** and **OBSERVER**, and **RECEIVER**

and OBSERVER are to be synchronized over the actions Snd and Rcv respectively.

```
1 <synchronize>
2   <first_role>SENDER</first_role>
3   <second_role>OBSERVER</second_role>
4   <action>Snd</action>
5 </synchronize>
6 <synchronize>
7   <first_role>RECEIVER</first_role>
8   <second_role>OBSERVER</second_role>
9   <action>Rcv</action>
10 </synchronize>
```

## 8 Result

An implementation of this method has been written in the *Haskell* programming language (<https://www.haskell.org/haskellwiki/Haskell>). It was used to verify a number of parameterized systems, all of which are communication protocols;

ABP	The alternating bit protocol, as described in 1 with the extension suggested in 2. The Alternating Bit Protocol corresponds to the <i>Sliding Window Protocol</i> with $k=2$ . Automatas for the the Sliding Window Protocol can be found in A.
ABP_F	A purpously faulty version of the ABP.
SW3	The sliding window protocol, with $k=3$ .
ABP_F	A purpously faulty version of the SW3.
SW4	The sliding window protocol, with $k=3$ .
SW5	The sliding window protocol, with $k=3$ .
BRP	The <i>Bounded Retransmission Protocol</i> , a variant of the alternating bit protocol.
BRP_F	A purpously faulty version of the BRP.

The **Backward** verifier uses *backward reachability* for verification, and follows the algorithm described in [2]. The algorithm was implemented as part of this project with the purpose of comparison in mind. It was therefore implemented in such a way that it accepts exactly the same specification language, as that of the verifier of this project.

The *MPass* verifier addresses the verification bounded-phase reachability problem, i.e. every process may perform only a bounded number of *phases* during a run in the system. This problem is then translated into a satisfiability formula (a quantifier-free Presburger formula to be exact) which in turn is solved by a third party SMT-solver (Z3 SMT-solver, <http://z3.codeplex.com>).

**Note on the MPass verification results.** The input language used in this project (see 7.6) was based on that of the *MPass* verifier, but does not fully coincide. The tool ships with some example protocols (ABP, ABP\_F, SW3\_F, BRP), which with minor changes could be adapted such that they would comply to the specification language used here. The remaining protocols were written from scratch, and use specification artifacts not comprehensible by *MPass*. Reformulating these would result in very different models, making it difficult to draw any conclusions from a comparison. For this reason, *MPass* was only used to verify a subset of the protocols mentioned above.

It should be mentioned that the time estimation for the *MPass* solver is part the time to generate an *SMT* formula, and part to verify that formula with a third party *SMT*-solver. The times generated in the latter part were approximated to full seconds, meaning the values have a measurement error up to  $\pm 0.5$  seconds.

## 8.1 Experimental Results

The results can be seen in 1. The table shows the size of the variable  $k$ , whether the result was safe or unsafe, the runtime and the amount of working memory used by the verifier for each of the communication protocols above. Further, the table shows the runtime and result of two other verifiers, verifying the same protocols. For these verifiers, only the runtime and the safety result is specified.

The results were generated on a 3.2GHz Intel Core i3 550 with 4GB of memory, running Debian Linux, using a single core.

## 8.2 Analysis of Results

The results in 1 show that the verification tool is in large efficient, yielding comparable verification times to backward reachability and faster than the *MPass* verifier for all of the protocols tested. Further, all verifiers yield the same safety results, which is to be expected as all three solvers are free from both false positives and negatives.

Examining the sliding window protocols of increasing size, i.e. ABP, SW3, SW4 and SW5, it is evident that the verifier suffers from a higher degree of exponential growth with respect to the problem size, than does the backward reachability verifier (which also suffers from exponential growth, as this is a inherent property of the model). First and foremost, it is the amount of working memory that is the bottleneck.

Increasing the size of the sliding window protocol means increasing the window size of the protocol – this not only means that the value of  $k$  for which the protocol can be found safe increases, but also that there is additional symbols to consider, and that the number of states and transitions increase (i.e. 1 compared to A). The number of potential configurations depend on exactly these factors and due to the overapproximation configurations, we expect that a large set of these will be reachable. As the verification tool stores *all* reachable configurations, without approximation or abstraction, this leads to memory becoming a bottle-neck for this particular protocol.

	??					Backward			MPass	
	k	size(V)	Result	Time	Mem	Size V	Result	Time	Result	Time
ABP	2	108	Safe	0.00s	1MB	56	Safe	0.01s	Safe	1.04s
ABP_F	1	–	Fail	0.00s	1MB	–	Fail	0.01s	Fail	6.04s
SW3	3	4247	Safe	0.10s	3MB	270	Safe	0.17s	–	–
SW3_F	1	–	Fail	0.00s	1MB	–	Fail	0.10s	Fail	26.08s
SW4	4	98629	Safe	3.64s	36MB	840	Safe	2.03s	–	–
SW5	5	1834345	Safe	120.20s	924MB	2028	Safe	24.31s	–	–
BRP	2	45	Safe	0.02s	3MB	–	??	Timeout	Safe	1.23s
BRP_F	1	–	Fail	0.00	2	–	Fail	0.15	–	–

Table 1: Runtime and verification results for the verification method in this paper, in comparison to backward reachability and the MPass verifier.

## 9 Summary and Further Work

In this paper I have investigated the possibility of verifying systems depending on lossy channels. The approach was to model such systems as parameterized systems and to use abstract interpretation techniques in order to bound systems with otherwise infinite reachable states, to a carefully chosen finite subset of those states. This method is influenced by and builds upon previous work[1], adapting the existing verification method to work for unbounded lossy channels.

The verification method was implemented, and a protocol specification language was designed, influenced by the XML-layout used by the MPASS verification language[4]. Experimental results with the verifier, in comparison to that of the MPASS verifier and a verification algorithm based on backward reachability analysis[2], show that the method achieved comparable or better results on most of the protocols tested.

A notable weakness of the verification method is that it struggles with the space and time complexity caused by an increased number of messages, but copes relatively well with an increase of local states in the processes, because all reachable channel evaluations are explicitly stored. This is a point that could be improved, by finding a method to abstractly represent a larger number of channel evaluations more compactly, possibly by introducing further overapproximation.

In addition to this, an important theoretical issue has been largely overlooked in this paper, i.e. the fact that the verifier is not guaranteed to ever converge towards a solution. Considering that the verifier terminates for all tested protocols, it is likely that the verification algorithm could leave such a guarantee for at least some classes of problems, as is done in [1]. Identifying and formally proving such guarantee of termination would be a valuable theoretical addition worth investigation.

## 10 Related Work

*Parameterized model checking* focuses verification scenarios where the size of the problem under observation is a parameter of the system, and the size has no trivial upper bound. The goal is to verify the correctness of the system regardless of the value of the parameter. As this generally corresponds to a transition system of infinite size, research in this field of verification focuses on techniques to limit the size of the transition system.

One such method is the *invisible invariants* method[5], which similar to [1] and [21] use *cut-off* points to check invariants. Such cut-off points can be found dynamically[18] or be constant[13]. The works of Namjoshi[21] show that methods based on process invariants or cut-offs are complete for safety properties.

Small model systems have been investigated in [18], which combines it with infinite state backward coverability analysis. Such methods prevent its use on undecidable reachability problems, such as those considered in [1]. The work of [1] also show that the problem is decidable for a large class of well quasi-ordered systems, including Petri Nets[1]. Practical results indicate that these methods may be decidable for yet larger classes of systems. More on well-structured infinite transition systems can be found in [14].

Abstract interpretation techniques were first described by Cousot and Cousot[9][10]. Similar work to [1] can be found in [17, 16].

Edsger Dijkstra was the first to consider the interaction between processes communicating over channels[11][6]. In [8], the authors show that verification of perfect channels systems is undecidable, by relating it to the simulation of a Turing Machine[8]. The decidability of lossy channels has been researched in [2, 7].

Similar to this thesis, [19] make use of abstract interpretation to channel systems, applying the technique to regular model checking. MPass[4] is a verification tool for channel systems, that restates the verification problem to an equivalent first-order logic, which is then solved by an SMT solver. Its input language is roughly the same as this thesis, although the tool is more general, being applicable also on *stuttering* and unordered channels.

## References

- [1] ABDULLA, P., HAZIZA, F., AND HOLÍK, L. All for the price of few. In *Verification, Model Checking, and Abstract Interpretation*, R. Giacobazzi, J. Berdine, and I. Mastroeni, Eds., vol. 7737 of *Lecture Notes in Computer Science*. Springer Berlin Heidelberg, 2013, pp. 476–495.
- [2] ABDULLA, P., AND JONSSON, B. Verifying programs with unreliable channels. In *Logic in Computer Science, 1993. LICS '93., Proceedings of Eighth Annual IEEE Symposium on* (Jun 1993), pp. 160–170.
- [3] ABDULLA, P. A. Well (and better) quasi-ordered transition systems. *Bulletin of Symbolic Logic* 16, 4 (12 2010), 457–515.
- [4] ABDULLA, P. A., ATIG, M. F., CEDERBERG, J., MODI, S., REZINE, O., AND SAINI, G. Mpass: An efficient tool for the analysis of message-passing programs.
- [5] ARONS, T., PNUELI, A., RUAH, S., XU, Y., AND ZUCK, L. Parameterized verification with automatically computed inductive assertions? In *Computer Aided Verification*, G. Berry, H. Comon, and A. Finkel, Eds., vol. 2102 of *Lecture Notes in Computer Science*. Springer Berlin Heidelberg, 2001, pp. 221–234.
- [6] BAIER, C., KATOEN, J.-P., ET AL. *Principles of model checking*, vol. 26202649. MIT press Cambridge, 2008.
- [7] BERTRAND, N., AND SCHNOEBELEN, P. Model checking lossy channels systems is probably decidable. In *Foundations of Software Science and Computation Structures*, A. Gordon, Ed., vol. 2620 of *Lecture Notes in Computer Science*. Springer Berlin Heidelberg, 2003, pp. 120–135.
- [8] BRAND, D., AND ZAFIROPULO, P. On communicating finite-state machines. *Journal of the ACM (JACM)* 30, 2 (1983), 323–342.
- [9] COUSOT, P., AND COUSOT, R. Abstract interpretation: a unified lattice model for static analysis of programs by construction or approximation of fixpoints. In *Proceedings of the 4th ACM SIGACT-SIGPLAN symposium on Principles of programming languages* (1977), ACM, pp. 238–252.
- [10] COUSOT, P., AND COUSOT, R. Systematic design of program analysis frameworks. In *Proceedings of the 6th ACM SIGACT-SIGPLAN symposium on Principles of programming languages* (1979), ACM, pp. 269–282.
- [11] DIJKSTRA, E. W. Information streams sharing a finite buffer. *Information Processing Letters* 1, 5 (1972), 179 – 180.
- [12] EMERSON, E., AND NAMJOSHI, K. On model checking for non-deterministic infinite-state systems. In *Logic in Computer Science, 1998. Proceedings. Thirteenth Annual IEEE Symposium on* (Jun 1998), pp. 70–80.

- [13] EMERSON, E. A., AND NAMJOSHI, K. S. Reasoning about rings. In *Proceedings of the 22nd ACM SIGPLAN-SIGACT symposium on Principles of programming languages* (1995), ACM, pp. 85–94.
- [14] FINKEL, A., AND SCHNOEBELEN, P. Well-structured transition systems everywhere! *Theoretical Computer Science* 256, 1 (2001), 63–92.
- [15] FREDLUND, L.-Å., AND SVENSSON, H. Mcerlang: a model checker for a distributed functional programming language. In *ACM SIGPLAN Notices* (2007), vol. 42, ACM, pp. 125–136.
- [16] GANTY, P., RASKIN, J.-F., AND VAN BEGIN, L. A complete abstract interpretation framework for coverability properties of wsts. In *Verification, Model Checking, and Abstract Interpretation* (2006), Springer, pp. 49–64.
- [17] GEERAERTS, G., RASKIN, J.-F., AND VAN BEGIN, L. Expand, enlarge, and check. In *Proceedings of MOVEP06: MOdeling and VERifying parallel processes* (2006), p. 4.
- [18] KAISER, A., KROENING, D., AND WAHL, T. Dynamic cutoff detection in parameterized concurrent programs. In *Computer Aided Verification* (2010), Springer, pp. 645–659.
- [19] LE GALL, T., JEANNET, B., AND JÉRON, T. Verification of communication protocols using abstract interpretation of fifo queues. In *Algebraic Methodology and Software Technology*. Springer, 2006, pp. 204–219.
- [20] MCMILLAN, K. L. *Symbolic model checking*. Springer, 1993.
- [21] NAMJOSHI, K. S. Symmetry and completeness in the analysis of parameterized systems. In *Verification, Model Checking, and Abstract Interpretation* (2007), Springer, pp. 299–313.
- [22] PNUELI, A., XU, J., AND ZUCK, L. Liveness with  $(0,1, \infty)$ - counter abstraction. In *Computer Aided Verification*, E. Brinksma and K. Larsen, Eds., vol. 2404 of *Lecture Notes in Computer Science*. Springer Berlin Heidelberg, 2002, pp. 107–122.
- [23] ZUCK, L., AND PNUELI, A. Model checking and abstraction to the aid of parameterized systems (a survey). *Computer Languages, Systems & Structures* 30, 3–4 (2004), 139 – 169. Analysis and Verification.



## A Automata for the Sliding Window Protocol

