

HYBRID ARTIFICIAL POTENTIAL FIELD FOR PATH PLANNING AND OBSTACLE AVOIDANCE

Shashwat Sinha

University of Nottingham
School of Computer Science
Nottingham, United Kingdom

ABSTRACT

Path planning is a critical component in robotics, enabling autonomous systems to navigate efficiently while avoiding obstacles. Traditional techniques such as Artificial Potential Fields (APF) face challenges like local minima and inefficiencies in dynamic environments. Hybrid algorithms, combining APF with A*, offer promising solutions by leveraging A*'s heuristic capabilities to guide potential field-based navigation. This paper reviews the theoretical foundations of APF and A*, explores their integration, and presents simulation results illustrating the efficacy of the hybrid approach in diverse environments. The study discusses implications, limitations, and future research directions for improving robotic navigation.

Index Terms— Artificial Potential Field, Hybrid Algorithm - A* Combined APF, Obstacle Avoidance, Heuristic Search, Path Planning

1. INTRODUCTION

Path planning remains an essential element in robotics, enabling autonomous systems to navigate efficiently from start to finish points while avoiding obstacles. Such capabilities are pivotal in high-stakes applications like autonomous driving and robotic-assisted medical procedures, where precision and dependability are essential. Conventional path planning techniques, such as Artificial Potential Fields (APF), face challenges like local minima, where robots can get stuck at non-goal points due to inadequate potential function configurations. Additionally, these methods may underperform in complex environments filled with multiple dynamic obstacles, leading to inefficiencies in time and energy usage, which are vital for the effectiveness of autonomous operations [1], [2]. Dynamic hybrid algorithm crafted by Han, Wu, and Sun (2023), adept at swiftly adjusting to unforeseen obstacles while integrating instantaneous local planning. This innovation markedly enhances navigational efficiency in dynamic environments [1]. Furthermore, Bonetti and Sabattini (2023) have introduced specialized algorithms tailored for industrial contexts—Roadmap Hybrid A* and Waypoints Hybrid A*.

Leveraging environmental mapping, these algorithms optimize navigation within confined spaces [2]. These advancements showcase the heightened adaptability and versatility of hybrid path planning techniques, promising to reshape robotic navigation across diverse sectors. This research aims to compare the traditional APF method with a hybrid method that integrates APF with the A* algorithm. The study investigates whether combining APF with the heuristic navigation capabilities of A* can effectively mitigate the issue of local minima.

2. BACKGROUND REVIEW

Artificial Potential Fields (APF) have been a cornerstone in robotics for navigation and pathfinding since the concept was popularized by Khatib in the 1980s [3]. The fundamental idea behind APF is to model the robot's environment using potential fields wherein obstacles apply repulsive forces, and goals apply attractive forces. This method translates the task of navigation into a problem of dynamics and control, guiding a robot along the path of the steepest descent of the potential field [4].

APF is advantageous due to its simplicity and real-time performance, making it suitable for dynamic environments where decisions need to be rapidly made [5]. However, the method is not without limitations. The most significant challenge is the local minima problem, where a robot gets stuck at a local minimum or saddle point in the potential field, unable to reach the goal [6]. Another issue is path oscillations and inefficient route choices when navigating around obstacles [7].

In practical applications, APFs have been widely used, "from autonomous vehicles navigating urban environments to robots operating in hazardous areas where human intervention is risky" [8]. Despite its widespread use, the adaptation of APF to complex environments often requires careful tuning of the potential fields and may still be prone to errors due to the inherent issues mentioned earlier.

The A* algorithm introduced by Hart, Nilsson, and Raphael in 1968, achieves optimal pathfinding performance by combining features of greedy best-first search and Dijk-

stra's algorithm [9]. The core mechanism of A* involves maintaining a priority queue of paths based on their cost, along with an estimate of the cost required to reach the goal from each node, thus balancing between path optimization and performance. A*'s major strength lies in its versatility and efficiency, applicable across various fields, from video game AI to robotic pathfinding. A* is especially effective in environments where an accurate heuristic can significantly enhance pathfinding efficiency [10]. Despite its efficacy, A* can be computationally intensive in large graphs or complex grids due to its exhaustive nature, which requires exploring all potential paths to find the optimal route [11].

Hybrid pathfinding techniques, which combine heuristic methods like A* with potential fields, aim to mitigate the limitations of both approaches while harnessing their strengths. These methods have been increasingly explored in recent studies, seeking to enhance robotic navigation systems in complex and dynamic environments [1].

One significant hybrid approach integrates A* with APF, utilizing A*'s efficient pathfinding capabilities to guide the potential field approach away from local minima and ensure goal-oriented behavior. This integration allows robots to efficiently plan paths in complicated environments by leveraging the heuristic assessment of A* to inform the directionality of the potential field, thus avoiding inefficient oscillations and dead-ends typically associated with APF [2].

Further studies have focused on refining these hybrid models, introducing adaptive elements that adjust the influence of heuristic and potential field components based on real-time environmental feedback [12]. For instance, the dynamic weighting of A* and APF components can vary depending on the proximity to obstacles or the overall goal, providing a more responsive and adaptive navigation system [13].

3. THEORETICAL FRAMEWORK

In the theoretical framework, I will explore the foundational principles and inherent challenges of the Artificial Potential Fields (APF) method and the A* algorithm, focusing on their applications in robotic path finding. This discussion extends to the integration of A* with APF, highlighting how this hybrid approach enhances navigation efficiency and mitigates common obstacles like local minima.

3.1. Artificial Potential Field

The Artificial Potential Fields (APF) method is a navigational and path finding technique widely employed in robotics, where the environment is modeled as a field of forces exerted by obstacles and goals. At its core, the APF method uses potential fields where each obstacle generates a repulsive force, while the goal exerts an attractive force, guiding the robot along a path of minimal potential energy.

Mathematically, the potential at a point \mathbf{x} in the field is given by $U(\mathbf{x}) = U_{\text{att}}(\mathbf{x}) + U_{\text{rep}}(\mathbf{x})$, where $U_{\text{att}}(\mathbf{x})$ and $U_{\text{rep}}(\mathbf{x})$ are the attractive and repulsive potentials, respectively.

The attractive potential is typically modeled as a quadratic function centered at the goal location \mathbf{x}_{goal} :

$$U_{\text{att}}(\mathbf{x}) = \frac{1}{2}\xi\|\mathbf{x} - \mathbf{x}_{\text{goal}}\|^2,$$

where ξ is a positive scaling factor that adjusts the steepness of the gradient.

Conversely, the repulsive potential from an obstacle is formulated to increase as the robot approaches the obstacle, often defined as:

$$U_{\text{rep}}(\mathbf{x}) = \frac{1}{2}\eta\left(\frac{1}{\rho(\mathbf{x})} - \frac{1}{\rho_0}\right)^2 \text{ for } \rho(\mathbf{x}) \leq \rho_0,$$

with $\rho(\mathbf{x})$ representing the shortest distance from the robot to the nearest obstacle, ρ_0 being the influence radius of the obstacles, and η a constant determining the strength of the repulsive forces.

One significant drawback of using a pure Artificial Potential Field (APF) approach for path planning is its susceptibility to local minima. This issue arises when the robot encounters obstacle configurations that create potential wells, where the combined repulsive forces from obstacles and the attractive force towards the goal balance in such a way that the robot gets stuck, unable to find a path to the goal. Additionally, APF methods can produce oscillatory movements near obstacle boundaries due to conflicting repulsive forces, leading to inefficient and erratic paths. These characteristics can severely limit the effectiveness of APF in complex environments with multiple or closely spaced obstacles.

3.2. A* Algorithm

The A* algorithm is a heuristic-based search technique that provides an optimal and complete solution to the shortest path problem in graph traversal. Central to its functionality is the heuristic function, which estimates the cost to reach the goal from a given node. This heuristic is crucial for combining the reliability of Dijkstra's algorithm—which ensures the shortest path—with the efficiency of Greedy Best-First-Search, which optimizes for speed by focusing on nodes presumed to be closer to the goal. By leveraging this heuristic, A* prioritizes nodes based on their potential to lead to the quickest path, significantly reducing the search space and computation time.

One of the primary benefits of the A* algorithm in pathfinding is its adaptability and accuracy across various applications, from grid-based games to real-world robotic navigation. A* proves especially valuable in environments where an accurate cost heuristic can be formulated, allowing it to outperform other pathfinding algorithms by quickly and

efficiently finding the shortest path, even in complex and densely populated spaces.

The efficiency of the A* algorithm is attributed to its use of the following cost function to evaluate each node:

$$f(n) = g(n) + h(n)$$

where:

- $f(n)$ - total estimated cost of the path n ,
- $g(n)$ - cost from the start node to node n ,
- $h(n)$ - heuristic estimated cost from node n to the goal.

This cost function allows A* to effectively search by considering both the known costs incurred and the estimated costs remaining. The heuristic function $h(n)$ is particularly critical as it must be admissible, meaning it never overestimates the actual cost to reach the goal. This admissibility ensures the optimality and completeness of A* when searching for a path in diverse environments.

3.3. Combining A* with APF

The integration of the A* algorithm with Artificial Potential Fields (APF) presents a robust theoretical foundation for overcoming some of the inherent limitations of APF, notably its susceptibility to local minima. The A* algorithm, with its heuristic-based pathfinding capabilities, enhances APF by offering a structured approach to navigate towards the goal. It does this by considering both the gradients of the potential fields and the heuristic evaluation of potential costs, thus enabling a balance between global path optimization and local obstacle avoidance. This synergy allows the system to bypass local minima which APF alone might inaccurately assess as destination points.

Mathematically, in an environment defined by a potential field $U(x, y)$, the combined field is calculated as $U(x, y) = U_{\text{att}}(x, y) + U_{\text{rep}}(x, y)$, where $U_{\text{att}}(x, y)$ is the attractive potential pulling towards the goal, and $U_{\text{rep}}(x, y)$ is the repulsive potential pushing away from obstacles. A* uses this composite field by assessing paths based on both the proximity to the goal and the potential cost, which includes penalties for paths that traverse too close to obstacles or fall into local minima. The cost C from a node n to n' under the influence of this potential field is thus defined as $C(n, n') = g(n) + U(n') + h(n')$, where $g(n)$ represents the cost from the start node to n , $U(n')$ is the potential at node n' , and $h(n')$ is the heuristic estimate from n' to the goal [23]. This formulation ensures that the selected path minimizes both the actual travel distance and the potential energy, guiding the robot through an optimal path that strategically avoids obstacles.

While this combined approach effectively enhances pathfinding in complex environments, it also introduces additional computational overhead. The need to evaluate potential fields

alongside standard A* computations increases the path planning time, which can become significant in large or densely cluttered environments. Nevertheless, the advantage of more reliable and safer navigation in intricate scenarios often justifies the extra computational effort, especially in critical robotic applications where ensuring navigational safety is paramount.

This dual methodology of A* and APF not only mitigates the limitations of each individual approach but also leverages their strengths to improve robotic navigation significantly in environments where traditional methods might falter.

4. METHODOLOGY

4.1. Simulation Setup

Path planning is simulated in a 2D environment using Python, utilizing libraries such as NumPy for numerical operations, Matplotlib for visualization, and SciPy for distance transforms. Parameter tuning has been achieved using hit and trail method.

4.2. Artificial Potential Field

Algorithm 1 Artificial Potential Field

```

1:  $nrows, ncols \leftarrow$  dimensions of the field
2:  $d_0, \nu \leftarrow$  parameters for repulsion
3:  $\xi \leftarrow$  scaling factor for attraction
4:  $X, Y \leftarrow$  meshgrid for the environment dimensions
5:  $obstacle, repulsive, X, Y \leftarrow$ 
   GenerateObstacle( $nrows, ncols$ )
6:  $attractive, X, Y \leftarrow$  GenerateAttractive( $goal, \xi, X, Y$ )
7:  $f \leftarrow$  repulsive + attractive
8:  $route \leftarrow$  empty list
9:  $current \leftarrow$  start position
10: while not reached goal AND within max iterations do
11:    $gx, gy \leftarrow$  ComputeGradients( $-f$ )
12:    $current \leftarrow$  UpdatePosition( $current, gx, gy$ )
13:   Append  $current$  to  $route$ 
14: end while
15: return  $route$ 

```

Parameter	Value	Description
$nrows$	400	Grid rows count
$ncols$	600	Grid columns count
d_0	2	Repulsion distance threshold
ν	450	Repulsion coefficient
ξ	0.0025	Attraction coefficient
$max\ iterations$	1000	Maximum number of iterations

Table 1: Parameters of the Artificial Potential Field Algorithm

4.3. Hybrid Algorithm - A* Combined APF

In this hybrid approach, the A* search algorithm is augmented with artificial potential fields (APF) to better handle environments with obstacles. By incorporating potential field values into its cost function, A* is not only guided by the traditional cost of travel from node to node but also influenced by the potential costs associated with moving closer to obstacles or away from the goal. This dual consideration enables the algorithm to effectively prioritize pathways that not only aim towards the goal but also cleverly navigate around obstacles, thus avoiding common pitfalls such as local minima which pure potential field methods may encounter. The integration effectively balances the search for the shortest possible route with strategic detours necessitated by obstacle configurations, making it particularly adept in handling complex spatial challenges.

By combining A*'s systematic grid search with the responses of APF to environmental changes, the algorithm achieves more reliable and safer path planning. This approach minimizes the risk of deadlock in high-density obstacle configurations and ensures smoother navigation by adapting the path in real-time based on the surrounding potential fields.

Algorithm 2 A* Combined APF

- 1: Initialize grid dimensions, obstacle configurations, and potential fields
 - 2: Define start and goal positions
 - 3: Calculate potential fields: attractive and repulsive
 - 4: Combine fields to create a total potential landscape
 - 5: Implement A* search to find the path considering potential costs:
 - 6: **while** open set not empty **do**
 - 7: Pop current node from priority queue (lowest f-score)
 - 8: If current node is goal, reconstruct and return path
 - 9: **for** each neighbor of current **do**
 - 10: Calculate tentative g-score for neighbor
 - 11: If neighbor not visited or tentative g-score is lower than previously found
 - 12: Update neighbor's g-score, f-score, and path
 - 13: Push neighbor to priority queue
 - 14: **end for**
 - 15: **end while**
 - 16: **return** failure if no path found
-

Parameter	Value	Description
<i>nrows</i>	400	Rows in the grid
<i>ncols</i>	600	Columns in the grid
d_0	20	Repulsive potential impact
ν	1000	Repulsive potential strength
ξ	0.0025	Attractive potential strength
<i>start</i>	(350, 50)	Start coordinate (Y, X)
<i>goal</i>	(50, 350)	Goal coordinate (Y, X)
<i>maxIter</i>	1000	Iterations

Table 2: Parameters of the Hybrid Algorithm

5. DISCUSSION

5.1. Interpretation of Results

5.1.1. APF Result

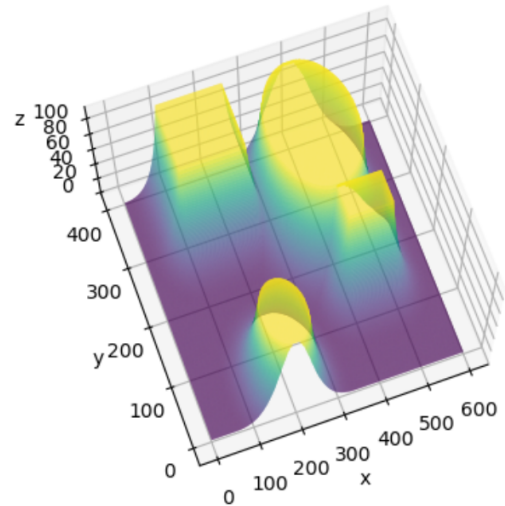


Fig. 1: Repulsive Potential Field - Map 1

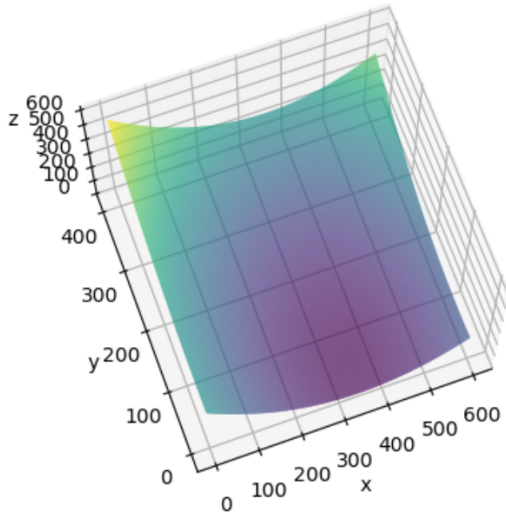


Fig. 2: Attractive Potential Field - Map 1

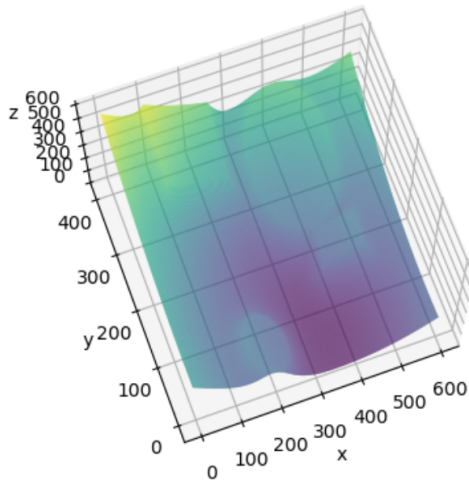


Fig. 3: Total Potential Field - Map 1

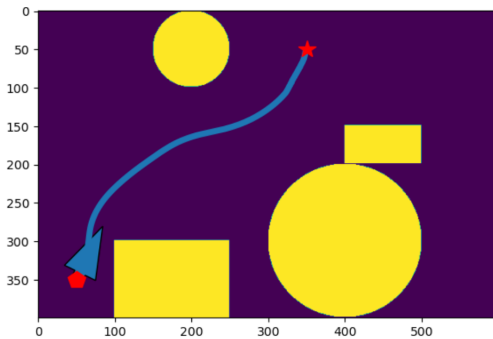


Fig. 4: Trajectory - Map 1: Successful

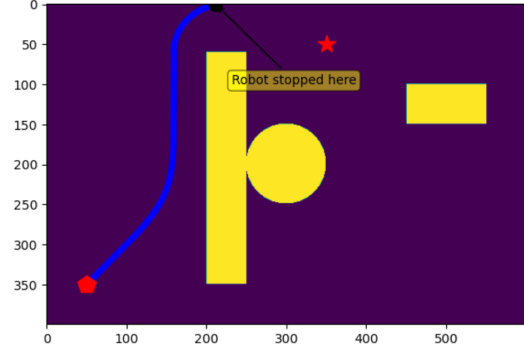


Fig. 5: Trajectory - Map 2: Stuck in Local Minima

In Fig. 4, the robot successfully circumnavigates the obstacles, following a path that curves around the centrally located large obstacle and stops successfully at the designated goal. This indicates effective interaction between the attractive and repulsive forces modeled by the APF algorithm.

Conversely, Fig. 5 illustrates a scenario where the robot fails to reach the goal and stops prematurely. This failure is attributable to the robot encountering a local minimum in the potential field, a common limitation in APF algorithms. The configuration and interaction of obstacles create a scenario where the repulsive forces from nearby obstacles overwhelm the attractive pull of the goal, trapping the robot in a local minimum of the potential field without a feasible path to continue towards the goal. This exemplifies one of the critical challenges of APF methods in complex environments, where multiple closely spaced obstacles can significantly alter the navigational outcomes.

5.1.2. Hybrid Algorithm Result

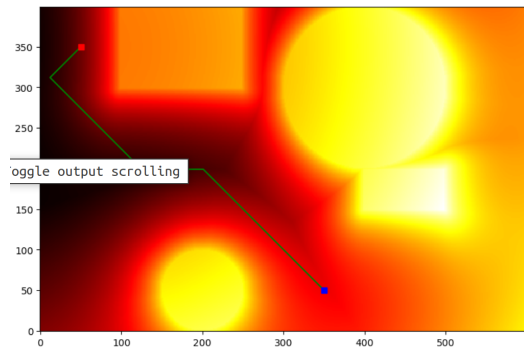


Fig. 6: Trajectory - Map 1: Successful

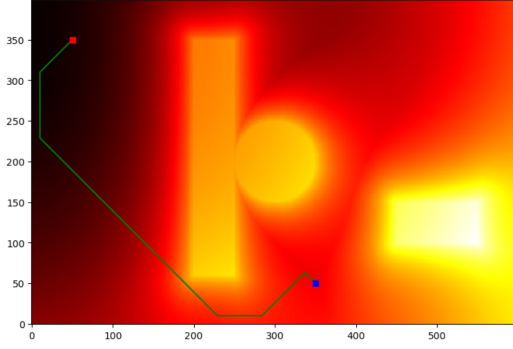


Fig. 7: Trajectory - Map 2: Successful

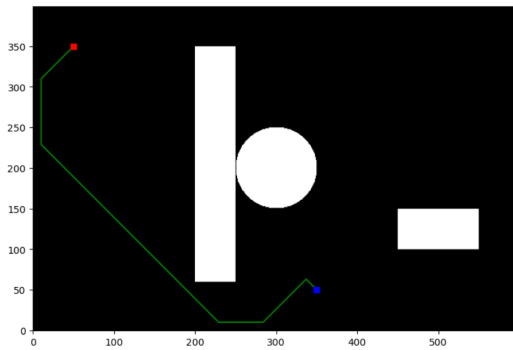


Fig. 8: Trajectory - Map 2: Successful

The visualizations illustrate the heightened pathfinding proficiency achieved by the hybrid A* with APF algorithm across two distinct obstacle configurations. In each scenario, the algorithm adeptly guides the robot from its initial position to the designated goal while circumventing obstacles along the way. These findings underscore the reliability and efficacy of the hybrid algorithm in diverse environmental settings.

5.2. Implications

This hybrid methodology not only enhances navigational efficacy and obstacle circumvention but also establishes a paradigm for integrating advanced, physics-based frameworks within pathfinding algorithms. Prospective developments may delve into dynamic heuristic mechanisms capable of real-time adaptation to evolving environments, potentially leveraging machine learning techniques for predictive refinements.

5.3. Limitations and Challenges

The integration of A* with artificial potential fields (APF) offers promising navigation enhancements, yet several limitations emerged. The computational complexity of dynamically adjusting the potential field for varying environments

could strain resources, hindering scalability. Accurate parameter tuning for path optimality versus obstacle avoidance is challenging and time-consuming. Additionally, reliance on predetermined heuristics in A* and the static nature of APF may lead to suboptimal performance, particularly in dynamic or unforeseen obstacle scenarios. These limitations may impact result interpretation, potentially overstating efficacy. Future research should explore adaptive parameter tuning, real-time sensor data integration, and broader environmental evaluations to address these challenges.

6. REFERENCES

- [1] L. Han, X. Wu, X. Sun, "Hybrid path planning algorithm for mobile robot based on A* algorithm fused with DWA," 2023.
- [2] A. Bonetti, L. Sabattini, "Improved path planning algorithms for non-holonomic autonomous vehicles in industrial environments with narrow corridors: Roadmap Hybrid A* and Waypoints Hybrid A* Pseudocodes," 2023.
- [3] O. Khatib, "Real-time obstacle avoidance for manipulators and mobile robots," 1985.
- [4] J. Borenstein and Y. Koren, "The vector field histogram - fast obstacle avoidance for mobile robots," IEEE Journal of Robotics and Automation, 1991.
- [5] S. Quinlan and O. Khatib, "Elastic bands: Connecting path planning and control," in Proceedings of the IEEE International Conference on Robotics and Automation, 1993.
- [6] T. Balch and R. C. Arkin, "Behavior-based formation control for multi-robot teams," IEEE Transactions on Robotics and Automation, 1998.
- [7] D. Fox, W. Burgard, and S. Thrun, "The dynamic window approach to collision avoidance," IEEE Robotics Automation Magazine, 1997.
- [8] M. A. Peshkin and A. C. Sanderson, "Planning robotic manipulation strategies for workpieces that slide," IEEE Journal of Robotics and Automation, 1988.
- [9] P. E. Hart, N. J. Nilsson, and B. Raphael, "A formal basis for the heuristic determination of minimum cost paths," IEEE Transactions on Systems Science and Cybernetics, 1968.
- [10] S. Russell and P. Norvig, "Artificial Intelligence: A Modern Approach," Prentice Hall, 2010.