


THUNDERBOLT® PRO



ICCONS®
Serious Connections®


SCREWBOLT ANCHOR

TDS | 1032.2

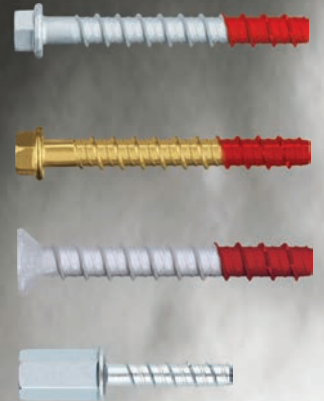



THUNDERBOLT® PRO HEX HEAD

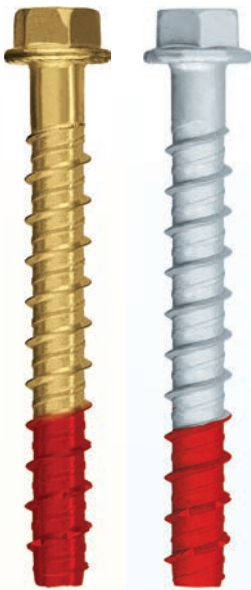

FEATURES & BENEFITS

- Optimum high-performance concrete and masonry screwbolt anchor
- AS 5216 compliant
- ETA assessed for cracked concrete and fire performance
- Flanged hex head design with "lightning bolt" locking serrations for a secure fix
- Also available in CSK and Internal thread head designs
- Stamped head markings for easy identification and traceability
- Zinc and corrosion resistant Nautilus® C coating options
- Fast installation at reduced torque
- No expansion, ideal for close to edge applications
- Suitable for installation with impact drivers
- Removable
- Available on ICCONS Designfix software

APPLICATIONS

- Structural fixings in cracked and uncracked concrete.
- Glazing, windows and storefronts
- Racking and shelving
- Attaching railings, handrails and balustrades
- Fixings wood structures in concrete.

ETA 20/0902-Option 1

ETA 20/0901 (RNSS)

RNSS = Redundant Non-Structural Systems

ZINC YELLOW	NAUTILUS® C		Drill Diameter (mm)	Min. Anchor Embedment (mm)	Drill Depth (mm)	Clearance Hole in Fixture (mm)	Max. Fixture Thickness (mm)	Head / Socket Size (mm)	*Max. Impact Tool Torque T _{max} (Nm)	 ETA Option	 qty	 qty
Part No.	Part No.	Description										
SXTB05050	SXTB05050G	5 x 50mm	5	35	45	8	15	8	250	RNSS	100	1600
SXTB06040	SXTB06040G	6 x 40mm	6	35	45	9	5	10	250	Option 1 & RNSS	100	1200
SXTB06050	SXTB06050G	6 x 50mm					15				100	1200
SXTB06075	SXTB06075G	6 x 75mm		55	65		20				100	600
SXTB06100	SXTB06100G	6 x 100mm					45				100	600
SXTB08055	SXTB08055G	8 x 55mm	8	50	60	12	5	13	250	Option 1	100	600
SXTB08060	SXTB08060G	8 x 60mm					10				100	600
SXTB08075	SXTB08075G	8 x 75mm			75		25				100	400
SXTB08100	SXTB08100G	8 x 100mm		65			35				100	400
SXTB10060	SXTB10060G	10 x 60mm	10	55	65	14	5	17	250	Option 1	50	300
SXTB10075	SXTB10075G	10 x 75mm					20				50	300
SXTB10100	SXTB10100G	10 x 100mm		75	85		25				50	200
SXTB10120	SXTB10120G	10 x 120mm					45				50	200
SXTB12080	SXTB12080G	12 x 80mm	12	75	90	16	5	19	600	Option 1	50	200
SXTB12100	SXTB12100G	12 x 100mm					25				50	100
SXTB12120	SXTB12120G	12 x 120mm			120		45				25	150
SXTB12150	SXTB12150G	12 x 150mm		105			45				25	100
SXTB14080	SXTB14080G	14 x 80mm	14	75	90	18	5	21	600	Option 1	25	150
SXTB14100	SXTB14100G	14 x 100mm					25				25	150
SXTB14130	SXTB14130G	14 x 130mm			130		55				25	100
SXTB14150	SXTB14150G	14 x 150mm					75				25	100
SXTB16100	SXTB16100G	16 x 100mm	16	90	110	19	10	24	600	Pending	15	90
SXTB16150	SXTB16150G	16 x 150mm					60				15	60
SXTB18100	SXTB18100G	18 x 100mm	18	90	110	22	10	26	600	Option 1	20	80
SXTB18150	SXTB18150G	18 x 150mm					60				15	60
SXTB18170	SXTB18170G	18 x 170mm		140	160		30				15	60
SXTB18200	SXTB18200G	18 x 200mm					60				10	40

* Max. power output of impact screw gun | RNSS = ETA Redundant Non Structural System | Option 1 = ETA Option 1 = AS 5216 Compliant

Excessive torque during installation may damage the anchor. Training, expertise and good judgement is required. Always adhere to anchor installation max. impact torque tool settings.

ETA assessment pending



THUNDERBOLT® PRO COUNTERSUNK HEAD



NAUTILUS® C Part No.	Description	Drill Diameter (mm)	Min. Anchor Embedment (mm)	Max Fixture Thickness (mm)	Dia. of CSK Drill Size (mm)	CSK Head Height (mm)	Drive Type (Torx)	*Max. Impact Tool Torque T _{max} (Nm)	ETA Option	qty	qty
SXTBCS06050G	6 x 50mm	6	35	15	15	4.5	T30	250	Option 1 & RNSS	100	1200
SXTBCS06075G	6 x 75mm		55	20						100	600
SXTBCS08060G	8 x 60mm	8	50	10	21	6.5	T45	250	Option 1	100	600
SXTBCS08075G	8 x 75mm			25						100	400
SXTBCS08100G	8 x 100mm			50						100	400
SXTBCS10065G	10 x 65mm	10	55	10	24.5	7.3	T50	250	Option 1	50	200
SXTBCS10075G	10 x 75mm			20						50	200
SXTBCS10100G	10 x 100mm			45						50	200
SXTBCS12085G	12 x 85mm	12	75	10	28	8	T55	600	Option 1	50	200
SXTBCS12100G	12 x 100mm			25						50	200
SXTBCS12150G	12 x 150mm			75						20	120

RNSS = ETA Redundant non-structural systems | Option 1 = ETA Option 1 = AS 5216 Compliant

* Max. power output of impact screw gun

Excessive torque during installation may damage the anchor. Training, expertise and good judgement is required. Always adhere to anchor installation max. impact torque tool settings.

THUNDERBOLT® PRO ROD HANGERZ™



ZINC CLEAR Part No.	Description	Drill Diameter (mm)	Min. Drill Depth (mm)	Head Socket Size (mm)	Internal Thread (metric)	*Max. Impact Tool Torque T _{max} (Nm)	ETA Option	qty	qty
SXTB-IM0635	6 X 35 ETA Rod Hanger (M8/M10)	6	45	13	M8/M10	250	Option 1 & RNSS	50	200
SXTB-IM0655	6 X 55 ETA Rod Hanger (M8/M10)		65					50	200
SXTB-IM0635-BK	6 X 35 ETA Rod Hanger (M8/M10) Bucket		45				Option 1 & RNSS	500	n/a
SXTB-IM0655-BK	6 X 55 ETA Rod Hanger (M8/M10) Bucket		65					500	n/a


RNSS = ETA Redundant non-structural systems | Option 1 = ETA Option 1 = AS 5216 Compliant

Excessive torque during installation may damage the anchor. Training, expertise and good judgement is required. Always adhere to anchor installation max. impact torque tool settings.

RANGE IDENTIFICATION

Code	Size	Description	Material
SXTB _____	Ø5 - Ø18	Hexagonal head with flange screw anchor	Carbon Steel Zinc Yellow Coating ≥ 5 µm plus Red Tip
SXTB _____ G	Ø5 - Ø18	Hexagonal head with flange screw anchor	Carbon Steel NAUTILUS®C Coating plus Red Tip
SXTBCS _____ G	Ø6 - Ø12	Countersunk screw anchor	Carbon Steel NAUTILUS®C Coating plus Red Tip
SXTB-IM _____	Ø6	Rod hanger internal thread screw anchor	Carbon steel, zinc plated coating ≥ 5 µm

ICCONS Nautilus® C corrosion resistant coating

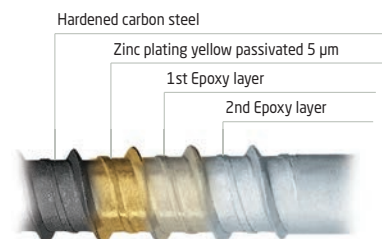


Nautilus® C corrosion resistant coating is a multi layered corrosion resistant coating designed for indoor applications as well as outdoor applications based on urban and industrial atmospheres, moderate sulfur dioxide pollution and coastal areas with low salinity. This is typically covered in EN ISO 12944-2, corrosivity category environment C3 and durability range HIGH according to EN ISO 12944-1. Under these conditions the Nautilus® C coating offers a typical minimum life expectancy of between 15 to 25 yrs. This information is based on testing in accordance with EN ISO 12944.6 and provides average life expectancy data for typical applications. The final decision on coating suitability should be made by the customer/design professional responsible for the application and based on local specific environmental conditions.



INSTALLATION DATA

TDS | 1032.2

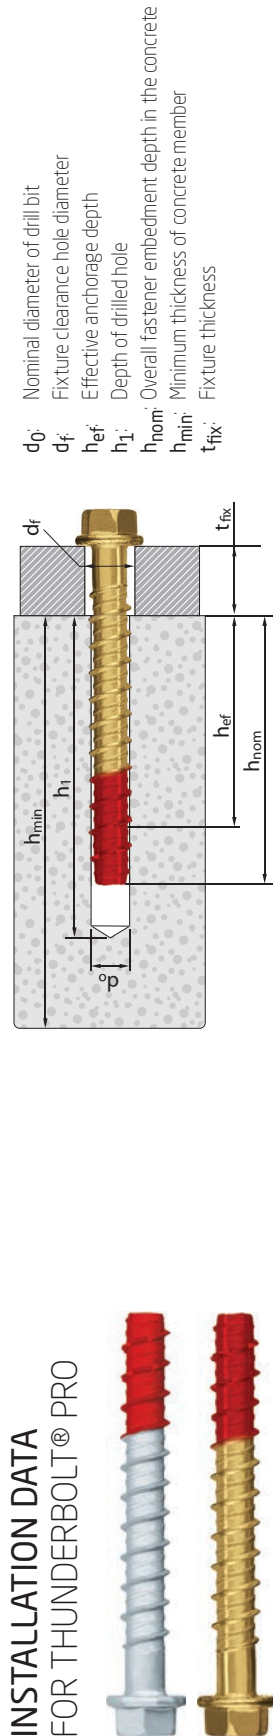


INSTALLATION DATA FOR THUNDERBOLT® PRO


General Installation parameters										Standard Installation depth (h _{ef, std})							Reduced Installation depth (h _{ef, red})											
Thunderbolt® PRO	Part No	Size	Assessed	d ₀ (mm)	d _f (mm)	Spanner SW/Tx [°]	T _{max} [Nm]	S _{min} (mm)	Minimum allowable edge distance	Minimum concrete thickness	h ₁ (mm)	h _{nom} (mm)	h _{ef} (mm)	t _{fix} (mm)	S _{crN} (mm)	C _{crN} (mm)	S _{crsp} (mm)	C _{crsp} (mm)	h _{min} (mm)	Depth of drill hole	Installation depth	Effective anchorage depth	t _{fix} (mm)	S _{crN} (mm)	C _{crN} (mm)	S _{crsp} (mm)	C _{crsp} (mm)	
	SXTB05050/G	Ø5 x 50	✓	RNSS	5	8	Sw 8	250	35	35	100	50	45	350	5	105	53	105	53	80	45	35	26.5	15	80	40	80	40
	SXTB06040/G	Ø6 x 40	✓			Sw 10				-	-	-	-	-	-	-	-	-	-				5					
	SXTB06050/G	Ø6 x 50	✓			Sw 10	250	35	35	-	-	-	-	-	-	-	-	-	-	100	45	35	26.0	15	78	90	90	45
	SXTB06075/G	Ø6 x 75	✓		6	9	Sw 10			100	65	55	430	20	129	65	170	85	85	100	45	35	40	65	39	90	45	45
	SXTB06100/G	Ø6 x 100	✓			Sw 10				100	65	55	430	45	129	65	170	85	85	100	45	35	65	65	78	90	45	45
	SXTB08055/G	Ø8 x 55	✓			Sw 13				-	-	-	-	-	-	-	-	-	-				5					
	SXTB08060/G	Ø8 x 60	✓			Sw 13	250	35	35	-	-	-	-	-	-	-	-	-	-	100	60	50	37.5	10	113	57	130	65
	SXTB08075/G	Ø8 x 75	✓		8	12	Sw 13			100	75	65	505	10	152	76	200	100	100	100	60	50	37.5	25	113	57	130	65
	SXTB08100/G	Ø8 x 100	✓			Sw 13				100	75	65	505	35	152	76	200	100	100	100	60	50	37.5	50	113	57	130	65
	SXTB10060/G	Ø10 x 60	✓			Sw 17				-	-	-	-	-	-	-	-	-	-				5					
	SXTB10070/G	Ø10 x 70	✓			Sw 17				-	-	-	-	-	-	-	-	-	-				15					
	SXTB10075/G	Ø10 x 75	✓		10	14	Sw 17	250	50	40	-	-	-	-	-	-	-	-	-	100	65	55	41.5	20	125	63	140	70
	SXTB10100/G	Ø10 x 100	✓			Sw 17				135	95	85	670	15	201	101	210	105	105	100	65	55	41.5	65	125	63	140	70
	SXTB10120/G	Ø10 x 120	✓			Sw 17				135	95	85	670	35	201	101	210	105	105	100	65	55	41.5	85	125	63	140	70

Note: Add "G" to the part no for Nautilus® C option. e.g. **SXTB05050G**. RNSS = Redundant Non-Structural Systems.

INSTALLATION DATA FOR THUNDERBOLT® PRO

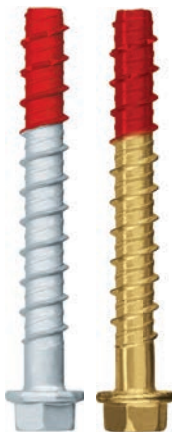

d_0 : Nominal diameter of drill bit
 d_f : Fixture clearance hole diameter
 h_{ef} : Effective anchorage depth
 h_1 : Depth of drilled hole
 h_{nom} : Overall fastener embedment depth in the concrete
 h_{min} : Minimum thickness of concrete member
 t_{fx} : Fixture thickness

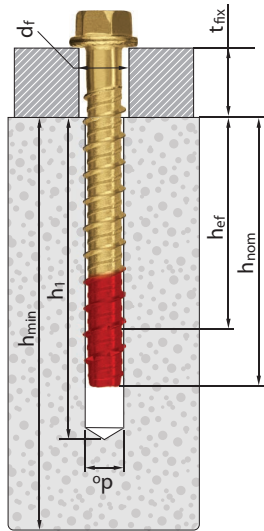

General Installation parameters										Standard Installation depth (h _{ef, std})								Reduced Installation depth (h _{ef, red})											
Thunderbolt® PRO	Part No	Size	Assessed	ETA	Drill bit diameter	Fixture clearance hole	Spanner	Impact tool torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	h _{nom} (mm)	Effective anchorage depth	Thickness of fixture	S _{CcN} (mm)	C _{CcN} (mm)	S _{CcSp} (mm)	C _{CcSp} (mm)	Minimum concrete thickness	Depth of drill hole	h _{nom} (mm)	Effective anchorage depth	Thickness of fixture	S _{CcN} (mm)	C _{CcN} (mm)	S _{CcSp} (mm)	C _{CcSp} (mm)	
SXTB12080/G		Ø12 x 80	✓				SW19					-	-	-	-	-	-	-	-	-	120	90	75	580	5				
SXTB12100/G		Ø12 x 100	✓		12	16	SW19	600	75	45	-	-	-	-	-	-	-	-	-	-	120	90	75	580	25	174	87	190	95
SXTB12120/G		Ø12 x 120	✓				SW19				170	120	105	83.5	15	251	126	220	110					45					
SXTB12150/G		Ø12 x 150	✓				SW19								45										75				
SXTB14080/G		Ø14 x 80	✓				SW21				-	-	-	-	-	-	-	-	-	-	120	90	75	580	5				
SXTB14100/G		Ø14 x 100	✓		14	18	SW21	600	80	50	-	-	-	-	-	-	-	-	-	-	120	90	75	580	25	174	87	190	95
SXTB14130/G		Ø14 x 130	✓				SW21				185	130	115	92.0	15	276	138	230	115					55					
SXTB14150/G		Ø14 x 150	✓				SW21								25										75				
SXTB18100/G		Ø18 x 100	✓				SW26				-	-	-	-	-	-	-	-	-	-	140	110	90	69.5	10				
SXTB18150/G		Ø18 x 150	✓		18	22	SW26	600	90	55	-	-	-	-	-	-	-	-	-	-	140	110	90	69.5	60	209	105	230	115
SXTB18170/G		Ø18 x 170	✓				SW26				225	160	140	112.0	30	336	168	350	175					80					
SXTB18200/G		Ø18 x 200	✓				SW26								60										110				

Note: Add "G" to the part no for Nautilus® C option. e.g. **SXTB12080G**




INSTALLATION DATA

TDS | 1032.2

INSTALLATION DATA FOR THUNDERBOLT® PRO NAUTILUS® C



d_k : Diameter of CSK head
 d_0 : Nominal diameter of drill bit
 d_f : Fixture clearance hole diameter
 h_{ef} : Effective anchorage depth
 h_1 : Depth of drilled hole
 h_{nom} : Overall fastener embedment depth in the concrete
 h_{min} : Minimum thickness of concrete member
 t_{fix} : Fixture thickness
 d_1 : Diameter of CSK drill size

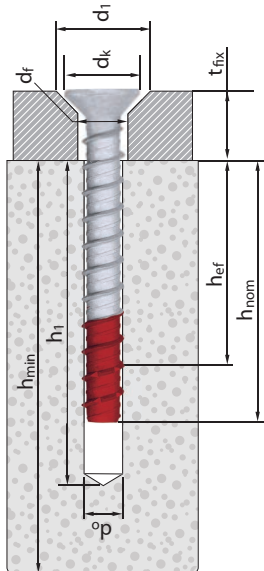

General Installation parameters				Standard Installation depth (h _{ef, std})								Reduced Installation depth (h _{ef, red})																				
Part No	Size	Assessed	ETA	d ₀ (mm)	d _f (mm)	d _k (mm)	d ₁ (mm)	Spanner Sw/Tx	T _{max} [Nm]	S _{min} (mm)	C _{min} (mm)	h _{min} (mm)	h ₁ (mm)	h _{nom} (mm)	h _{ef} (mm)	t _{fix} (mm)	S _{cr,N} (mm)	C _{cr,N} (mm)	S _{cr,sp} (mm)	C _{cr,sp} (mm)	h _{min} (mm)	h ₁ (mm)	h _{nom} (mm)	h _{ef} (mm)	t _{fix} (mm)	S _{cr,N} (mm)	C _{cr,N} (mm)	S _{cr,sp} (mm)	C _{cr,sp} (mm)			
Thunderbolt® PRO	SXTBCS06050G	✓	Ø6 x 50	6	9	12.4	15	TX30	250	35	35	-	-	-	-	-	-	-	-	-	-	100	45	35	26.0	15	40	78	39	90	45	
	SXTBCS06075G	✓	Ø6 x 75					TX30				100	65	55	43.0	20	129	65	170	85												
	SXTBCS08060G	✓	Ø8 x 60					TX45	250	35	35	-	-	-	-	-	-	-	-	-	-											
	SXTBCS08075G	✓	Ø8 x 75	8	12	18	21	TX45				100	75	65	50.5	10	152	76	200	100			100	60	50	37.5	25	50	113	57	130	65
	SXTBCS08100G	✓	Ø8 x 100					TX45																								
	SXTBCS10065G	✓	Ø10 x 65					TX50	250				-	-	-	-	-	-	-	-	-	-										
	SXTBCS10075G	✓	Ø10 x 75	10	14	21	24.5	TX50		50	40	-	-	-	-	-	-	-	-	-	-	100	65	55	41.5	20	45	125	63	140	70	
	SXTBCS10100G	✓	Ø10 x 100					TX50				135	95	85	67.0	15	201	101	210	105												
	SXTBCS12085G	✓	Ø12 x 85					TX55					-	-	-	-	-	-	-	-	-	-										
SXTBCS12100G	✓	Ø12 x 100	12	16	24	28	TX55	600	75	45	-	-	-	-	-	-	-	-	-	-	120	90	75	58	25	75	174	87	190	95		
SXTBCS12150G	✓	Ø12 x 150					TX55				170	120	105	83.5	45	251	126	220	110													




INSTALLATION DATA

TDS | 1032.2

INSTALLATION DATA FOR THUNDERBOLT® PRO ZINC PLATED



d_0 : Nominal diameter of drill bit
 h_{ef} : Effective anchorage depth
 h_1 : Depth of drilled hole
 h_{nom} : Overall fastener embedment depth in the concrete
 h_{min} : Minimum thickness of concrete member

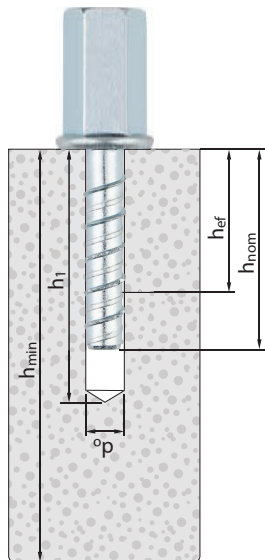

General Installation parameters					Standard Installation depth ($h_{ef, std}$)							Reduced Installation depth ($h_{ef, red}$)												
Part No	Size	ETA Assessed	d_0 (mm)	Spanner SW/Tx [-]	T_{max} [Nm]	S_{min} (mm)	C_{min} (mm)	Minimum allowable edge distance	Minimum concrete thickness h_{min} (mm)	Depth of drill hole l_h (mm)	Installation depth h_{nom} (mm)	Effective anchorage depth h_{ef} (mm)	Critical spacing (concrete cone) $S_{cr,N}$ (mm)	Critical edge distance (cone) $C_{cr,N}$ (mm)	Critical spacing (splitting) $S_{cr,sp}$ (mm)	Critical edge distance (splitting) $C_{cr,sp}$ (mm)	Minimum concrete thickness h_{min} (mm)	Depth of drill hole l_h (mm)	Installation depth h_{nom} (mm)	Effective anchorage depth h_{ef} (mm)	Critical spacing (concrete cone) $S_{cr,N}$ (mm)	Critical edge distance (cone) $C_{cr,N}$ (mm)	Critical spacing (splitting) $S_{cr,sp}$ (mm)	Critical edge distance (splitting) $C_{cr,sp}$ (mm)
SXTB-IM0635	Ø6 x 35 (M8-M10)	✓	6	SW 13	250	35	35	35	-	-	-	-	-	-	-	-	100	45	35	26.0	78	39	90	45
SXTB-IM0655	Ø6 x 55 (M8-M10)	✓		SW 13													100	65	55	43.0	129	65	170	85



THUNDERBOLT® PRO Performance in accordance with AS 5216

Parameters: Qualification based on AS 5216

Concrete: 20 MPa

Conditions: Single anchor, no edge distance, min recommended concrete thickness

Thunderbolt® PRO

Design Resistance Capacities - 20 MPa


Diameter	Installation Depth h_{nom} (mm)	Effective Depth h_{ef} (mm)	Uncracked concrete Tension N_{Rd} (kN)	Cracked concrete Tension N_{Rd} (kN)	Uncracked Concrete Shear V_{Rd} (kN)	Cracked concrete Shear V_{Rd} (kN)
6	35	26.0	2.78	2.54	7.43	5.20
	55	43.0	9.25	6.47	8.35	7.44
8	50	37.5	6.28	4.39	11.30	7.91
	65	50.5	11.77	8.24	13.05	10.46
10	55	41.5	8.77	6.14	17.10	11.97
	75	58.5	14.67	10.27	18.27	13.56
	85	67.0	17.99	12.59	18.27	18.27
12	75	58.0	14.49	10.14	24.83	23.63
	105	83.5	25.02	17.52	24.83	24.83
14	75	58.0	14.49	10.14	35.15	25.86
	115	92.0	28.94	20.26	35.15	35.15
18	90	69.5	19.00	13.30	50.54	35.38
	140	112.0	38.87	27.21	53.85	53.85

THUNDERBOLT® PRO Performance for use in redundant non-structural systems

Design Resistance Capacities - 20 MPa

Diameter	Installation Depth h_{nom} (mm)	Effective Depth h_{ef} (mm)	Uncracked concrete Tension N_{Rd} (kN)	Cracked concrete Tension N_{Rd} (kN)	Uncracked Concrete Shear V_{Rd} (kN)	Cracked concrete Shear V_{Rd} (kN)
5	35	26.5	4.47	3.13	4.47	3.13
	45	35.0	6.79	4.75	5.46	4.75
6	35	26.0	3.62	2.54	3.62	2.54
	55	43.0	9.25	6.47	8.35	6.47

INSTALLATION (SOLID CONCRETE)

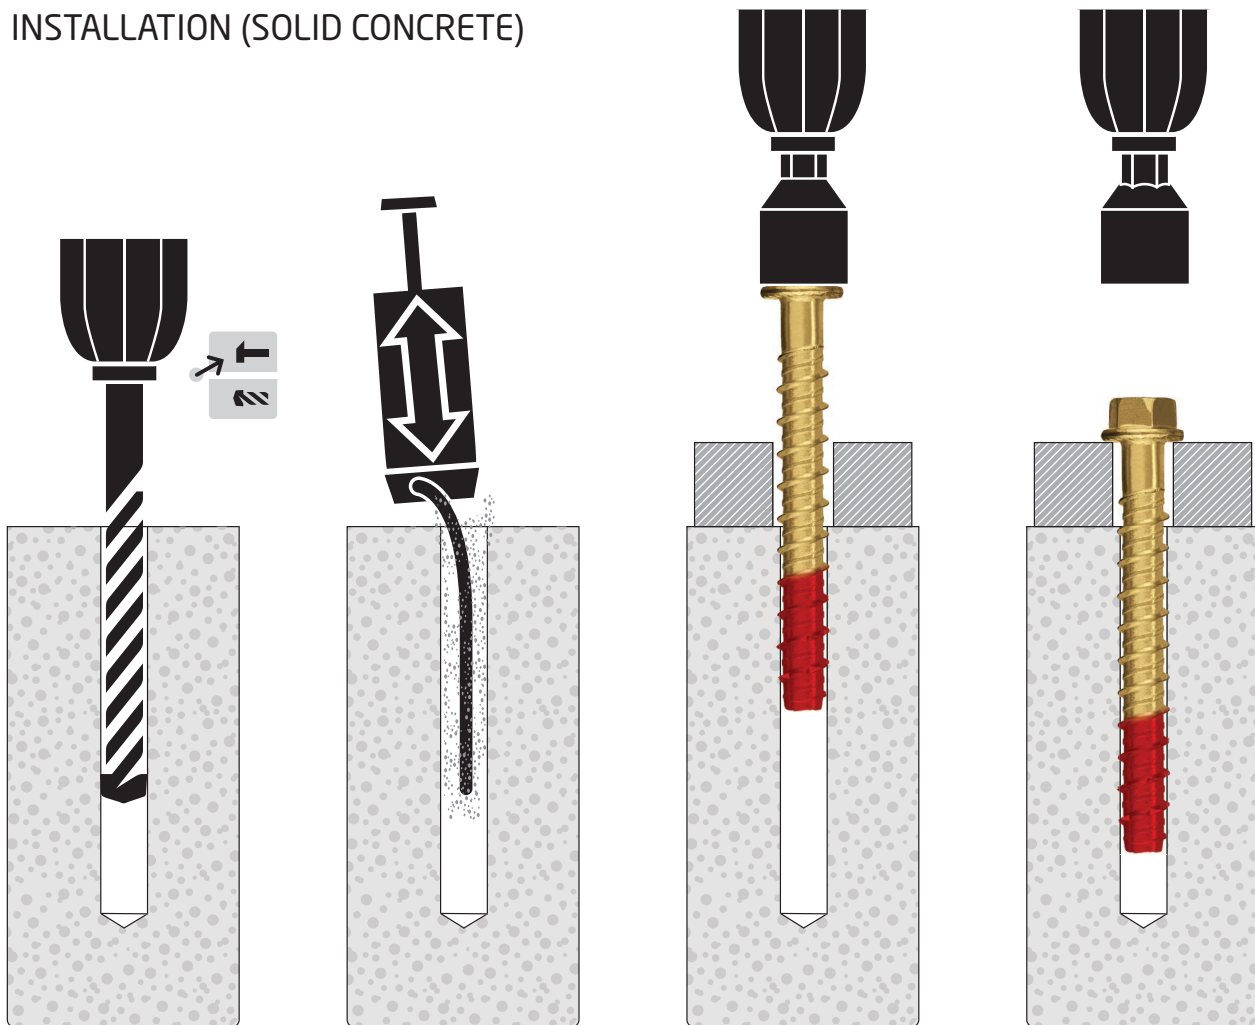

1. Drilling

Check the concrete is well compacted and without significant porosity.
Suitable for dry, wet and flooded holes.
Use drill in hammer mode.
Drill according to specified depths in previous tables.

2. Blow and clean

Clean the hole from dust and concrete remains.
Use blow pump and brush.

3. Install

Select a powered impact wrench or a torque wrench that does not exceed the maximum torque indicated in previous tables.
Attach an appropriate size hex socket to the wrench.
Mount the screw anchor head in the socket.

4. Apply torque


Drive the anchor with an impact driver or a torque wrench through the fixture and into the hole until the anchor head washer comes in contact with the fixture. The anchor must be snug after installation. Do not spin the hex socket off the anchor to disengage.



THUNDERBOLT® PRO Performance for use in redundant non-structural systems - prestressed hollow core slabs (C30/37 to C50/60)

Design Resistance Capacities

Diameter d_o	Min. Bottom Flange Thickness d_b (mm)	Effective Depth h_{ef} (mm)	Tension N_{Rd} (kN)	Shear V_{Rd} (kN)
5	25	20.0	2.44	2.44
	30	22.0	2.82	2.82
	40	26.5	3.73	3.73
6	25	20.0	2.44	2.44
	30	22.0	2.82	2.82
	40	26.0	3.62	3.62

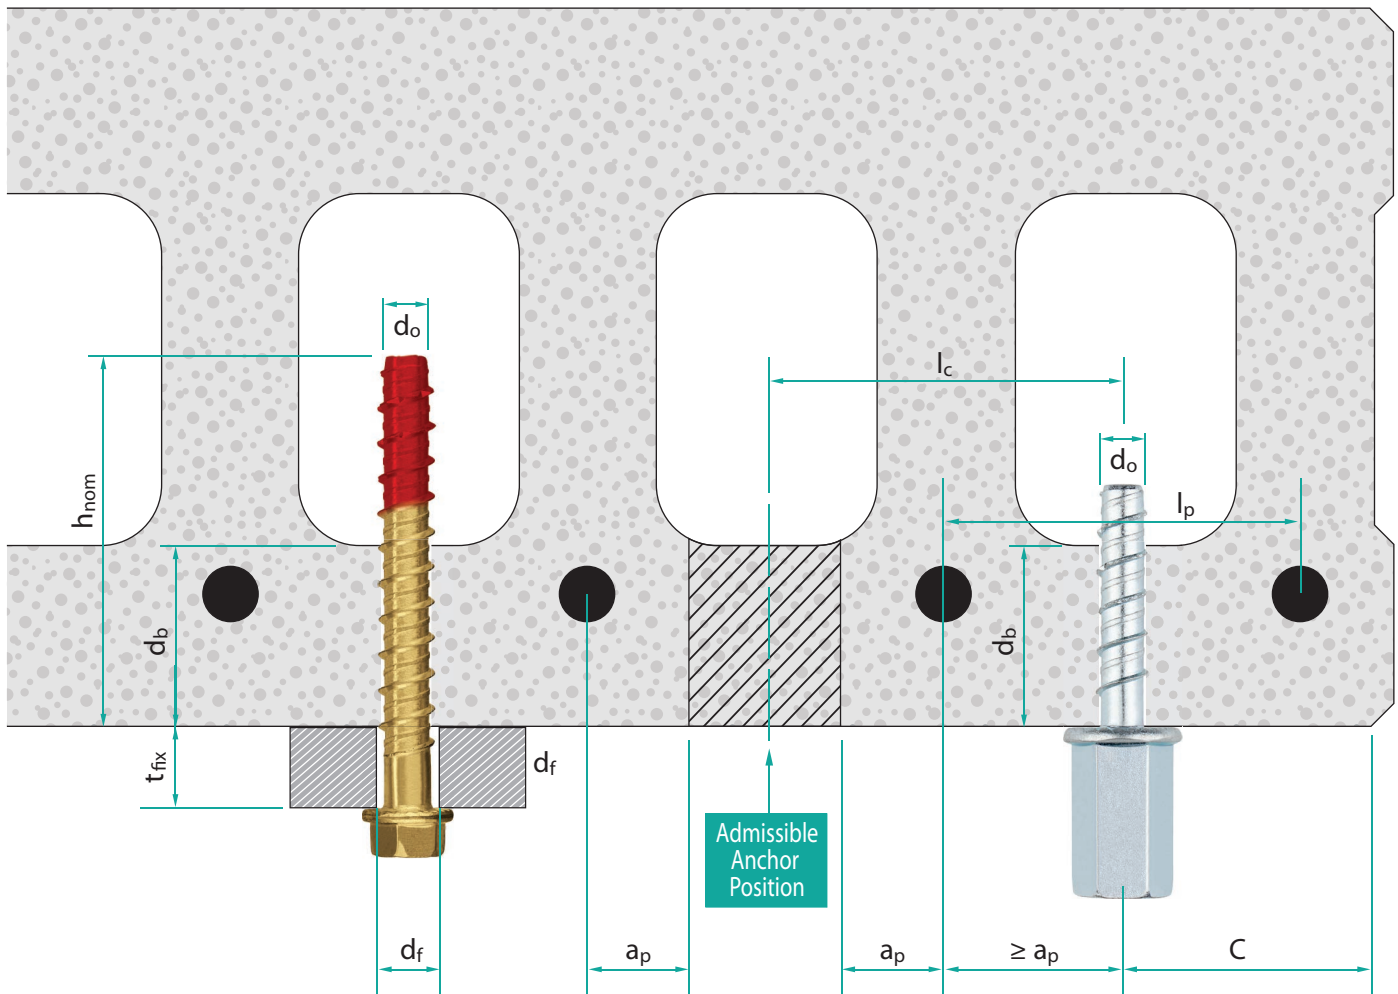

- d_o : Nominal diameter of drill bit
- d_f : Fixture clearance hole diameter
- d_b : Bottom flange thickness
- a_p : Distance between anchor position and prestressing steel ≥ 50 mm
- l_c : Core spacing distance ≥ 100 mm
- l_p : Steel reinforcement spacing distance ≥ 100 mm
- t_{fix} : Fixture thickness
- C : Edge distance



Anchoring

Adhesive

PURE
EPOXY
GEN³

ICCONS®


DESIGNFiX®
anchor design made easy

- An innovative 3D visual user interface, utilizing EN 1992-4 design methodology and suitable for design in accordance with AS 5216.
 - Seismic design under earthquake loads according to EN 1992-4, TR 045, TR 049
 - Finite element analysis steel baseplate design
- ICCONS DesignFiX® is a simple, intuitive and free to download (registration required) anchor design program for design engineers, project managers, site engineers and end users. Complex mechanical or chemical heavy duty anchor arrangements can be calculated in minutes.

INCLUDES THE NEW BIS PE GEN3 PURE EPOXY WITH 100 year design service life assessed in accordance with EAD 330499-01-0601

Optimum BIS Injection System anchorage depth

When selecting a BIS Adhesive Injection System, ICCONS DesignFiX allows for the automatic calculation of the most effective anchorage depth, taking into consideration the minimal and maximum values of the ETA.

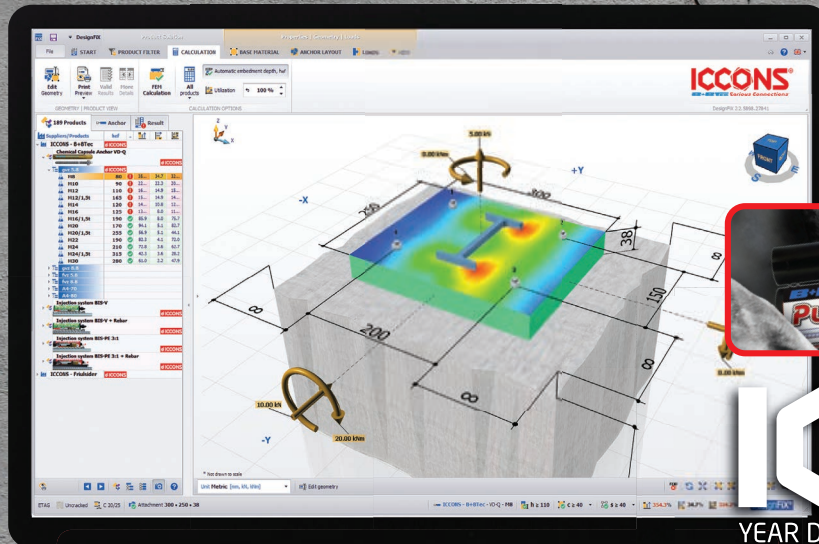100+
YEAR DESIGN LIFE

FREE DOWNLOAD www.iccons.com.au/software/anchor-design-software

Input freedom & 3D user interface


ICCONS DesignFiX offers complete freedom to select an anchor pattern and base plate configuration, as well as the position and direction of load combinations. Changes are made directly into the 3D user interface.

Anchor type comparison

ICCONS DesignFiX displays the usability of the various anchor types (according to EN 1992-4) including the values for each load type. This allows you to compare the calculation results of the different anchor types in a single easy to read panel. Design results suitable for use in accordance with AS 5216:2018.

Calculate base plate thickness

The integrated FEM-Calculation Method (Finite Element Method) in ICCONS DesignFiX allows you to calculate the base plate thickness based upon the stresses in the base plate in combination with the base plate configuration.





SCREWBOLT ANCHOR

TDS | 1032.2

ICCONS® PTY LTD

VICTORIA - HEAD OFFICE
383 Frankston Dandenong Rd,
Dandenong South,
Vic, 3175
P: **03 9706 4344**

NSW Branch
Unit A, 17 Seddon Street,
Bankstown,
New South Wales, 2200
P: **02 9791 6869**

QLD Branch
42-44 Nealdon Dr
Meadowbrook,
Queensland, 4131
P: **07 3200 6455**

S.A Branch
29-31 Weaver Street,
Edwardstown,
South Australia 5039
P: **08 8234 5535**

W.A. Branch
90 Christable Way,
Landsdale,
Western Australia, 6065
P: **08 6305 0008**

NORTHERN TERRITORY
Unit 1, 14 Menmuir Street,
Winnellie,
Northern Territory 0820
P: **08 8947 2758**

NEW ZEALAND

Sesto Fasteners
5E Piermark Road,
Albany, Auckland,
New Zealand 0630
P: **+64 9415 8564**
E: sestofasteners@gmail.com

THAILAND

ICCONS (Thailand) Co. Ltd.
55 Phetkasem 62/3, Bangkhuae,
Bangkok 0160
P: **+ 66 2 801 0764**
F: **+ 66 2 801 0764**
M: **+ 66 8 1 710 8745**
E: icconsthailand@hotmail.com