



ABN:09 090 840 412

Marine Report 1ST & Final - NON-SURVEY VESSEL – WORKBOAT

3 March 2026

CLIENT: GREATER GEELONG CONSTRUCTIONS

DATE: 2 March 2026

VESSEL: 6.0m Nicholson Work Punt by Allsea Boats

HIN: CN-ASB600250803

SITE: Taren Point, NSW



Figure 1:6.0m Nicholson Work Punt by Allsea Boats

The vessel a 2025 Nicholson 6m Work Punt by Allsea Boats was inspected and found to be structurally sound and compliant for use as a Non-Survey Work Boat Vessel, 2D – 1 Crew – 4 Special Personnel.

The measured length of this vessel is 5.76m with a beam of 2.24m.

The vessel is constructed to AS1799.1C and the rated horsepower for this vessel is 200Hp. The vessel is rated as carrying a maximum of 5 people @ 80 kgs or 400kgs. With a maximum load of 1070kgs

The vessel is fitted with a 2026, 115hp/86kW Yamaha Motor, Model F115LB with serial number 1148401. The horsepower rating of the vessel has not been exceeded.

The vessel is fitted with a portable OEM Fuel tank that complies to Australian and ISO Standards.

The vessel is fitted with level flotation; however life jackets will be required during operation.

The vessel is required to carry safety equipment as outline in NSCV Part G

The operator is required to produce and have a compliant SMS onboard at all times.

One issued the UVI must be displayed on both port and starboard rear quarters of the vessel.

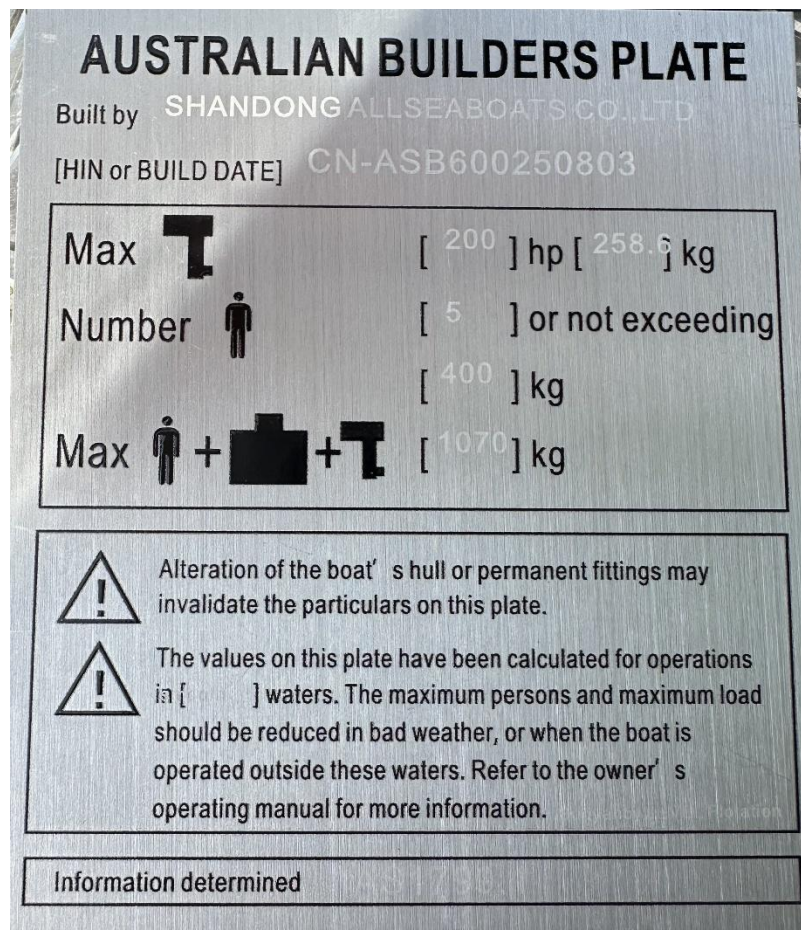


Figure 2: ABP



Figure 3: Outboard ID Plate



Figure 3: Outboard Installation

Kind Regards

Gavin Clark

Gavin Clark

Marine Surveyor | Shipwright



AMSA Accredited Marine Surveyor 6383-5378 3

Ph: 0418 442 515





Československý Lloyd

Notified Body 2371

EXAMINATION REPORT – STABILITY AND BUOYANCY No. 860162516

This is to certify that Československý Lloyd has undertaken the relevant examination procedure for the recreational craft identified below, which was found to meet the Essentials requirements of the Part A of Annex I to Directive 2013/53/EU (RCD) within the following scope 3.2 Stability and freeboard, 3.3 Buoyancy and flotation.

MANUFACTURER:

ShanDong Seaking Ocean Engineering Technology Co., Ltd.
Room 101&301, Building 7, 106 Xiangyang Road, Chengyang Street,
Chengyang District, Qingdao City, Shandong Province, China

PRODUCT DESCRIPTION:

Aluminium Fishing Boat

BOAT TYPE:

SK600

**Conformity Assessment
Module:**

**A1 – (a) test of stability in accordance with RCD point 3.2 of Part A of Annex I ;
(b) test of buoyancy characteristics in accordance with RCD point 3.3 of Part A
of Annex I.**

The certificate is valid only for the product specified in this certificate.

Product shall be marked with the identification number of the Notified Body 2371.



30.09.2019, Prague

Date, Place of issue

Jiří Hendrych

CS Lloyd

Terms and validity conditions:

The product liability rests with the manufacturer, his representative or, in the absence of a representative, the importer, in accordance with the General Product Safety Directive 2001/95/EC and Recreational Craft Directive 2013/53/EU.

The following conditions may render this document invalid:

- Changes in construction of the product as regards the examined technical file.
- Changes or amendments to the RCD.
- Changes or amendments in the standards with form basis for documenting compliance with the essential requirements of the RCD.

validity code: **A1267928-22C** Check validity of the certificate using this code on www.csllloyd.com

CS Lloyd, spol. s r.o., Pobřežní 620/3, Prague, Czech Republic

Page 1 of 2, F-505A (R4)

Description of product:	Aluminium Fishing Boat
--------------------------------	-------------------------------

Type of boat:	SK600	
Design Category:	-	C
No of hulls:	-	1
Maximum number of persons:	CL	5
Length of hull:	L_H (m):	6,00
Beam of hull:	B_H (m):	2,24
Draught:	T (m):	0,42
Propulsion	-	Engine
Type of engine:	-	Outboard
Max. engine power:	(kW / HP)	147,1 / 200
Max. weight of engine:	(kg / lbs)	258,6 / 570,1
Number of engines	-	1
Light craft condition mass:	m_{LC} (kg)	1070
Manufacturer's max. recommended load according to ISO 14945:	m_L (kg)	750¹
Loaded displacement mass:	m_{LDC} (kg)	1670
Construction material:	-	Aluminium Alloy
Moulded depth / Tube diameter:	H/H_t, (m)	1,09
Buoyancy elements volume:	(m ³)	2,0
Number of chambers:	-	-
Applied standards:	-	EN ISO 12217-3:2017

¹ Including the weight of the engine.

Notes:

Reviewed without comment.