


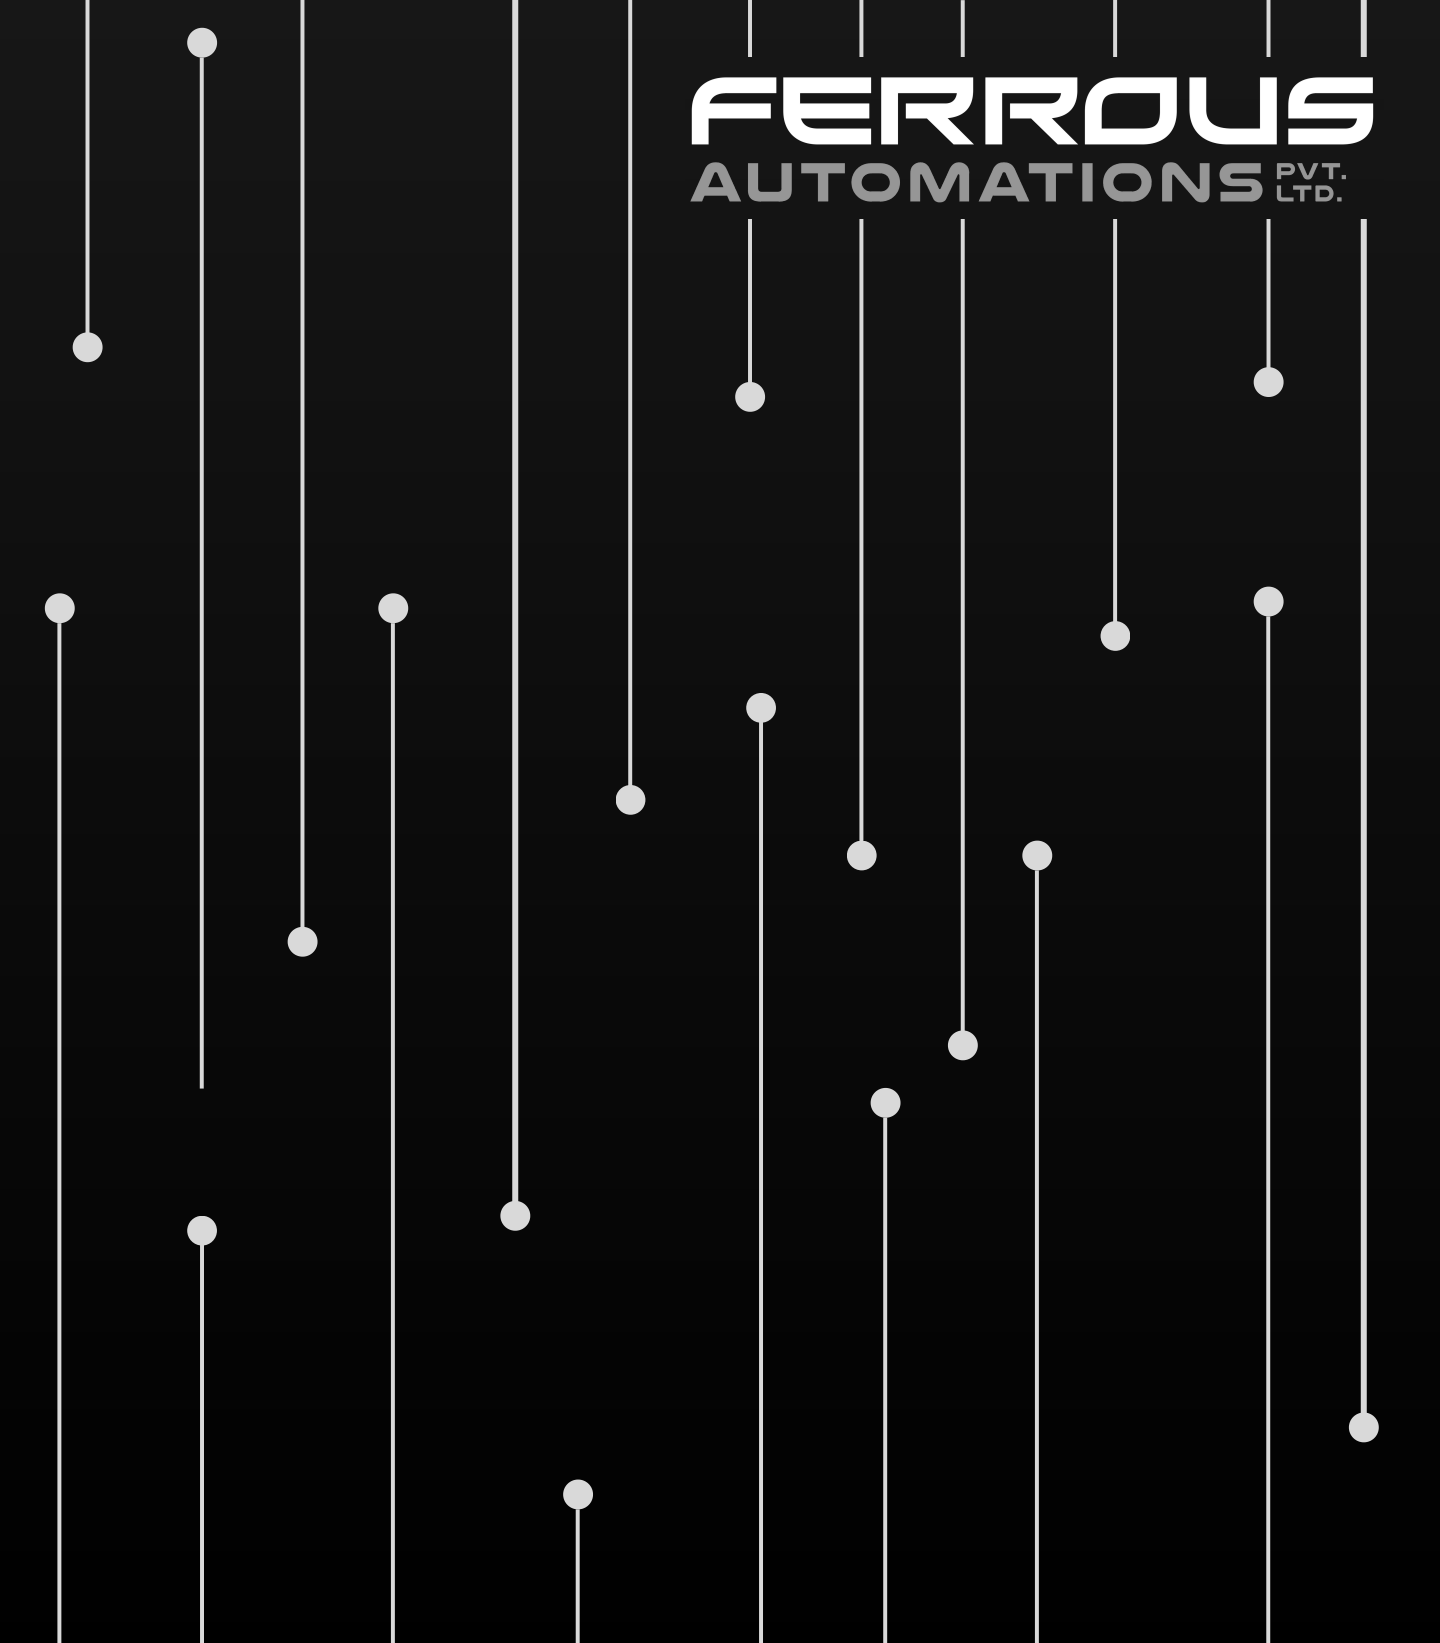

FERROUS
AUTOMATIONS PVT. LTD.

TELESCOPIC BELT CONVEYOR

BROCHURE

Telescopic Belt Conveyors are conveyors whose length can be varied by telescoping slides on the frame. They are popular at receiving and shipping docks where the conveyor is extended into inbound or outbound trailers for loading or unloading. Used across shipping, logistics, distribution centers, airports, warehouses, and stations — they are easy to set up, require minimal training, and are height-adjustable to match any truck bed or loading dock.

Maximum Conveyor

50 KG/M

Load Capacity

Upto

60%

Efficiency Gain

35 m/min; Customizable Upto

50 M/MIN

Belt Speed



HIGHLIGHT FEATURES

24/7 TESTED

Built and proven for round-the-clock operation

EASY TO OPERATE

Minimal training required

SAFETY FIRST

Engineered with safety as the top priority

MAXIMUM REACH

Designed to extend as far as your job demands

ERGONOMIC DESIGN

Reduces operator strain in daily use

BUILT TO LAST

Sturdy, durable, long service life

SPARE PARTS READY

Surplus critical spare parts always in stock

PREMIUM QUALITY

High-grade materials and components throughout

TRUSTED ELECTRICALS

Only reputable electrical brands used

CUSTOM COLOURS

Exterior colour customizable to your brand

MULTIPLE MODELS

Variants available to suit your needs

FULLY CUSTOMIZABLE

Adaptable to your specific application

QUALITY & BRANDS

RAW MATERIAL	Jindal / TATA / AMNS / SAIL	SWITCHGEAR	Schneider / Siemens / Equivalent
CONVEYOR BELT	Forbo / Equivalent	CABLES	Igus / Polycab
MOTORS	SEW / Nord / Bonfiglioli	GRAB CHAIN	Igus / Equivalent
CHAIN	Diamond / Renold	SENSORS	Pepperl+Fuchs / SICK / Equivalent
BEARINGS	SKF / FAG / NTN / IKO	FABRICATION	CNC laser cut for accuracy
PLC	Siemens / Delta / Equivalent	FINISH	Powder coated for durability
VFD	Siemens / Delta / Equivalent	STRUCTURE	One-piece formed side pressings

SAFETY FEATURES

-  Safety stickers at all required points
-  4 emergency stop switches — panel, both sides, and front
-  Anti-collision bumper
-  Proximity sensors for front obstacle detection
-  Gap plates at all pinch areas
-  Side brush to prevent dust and debris entry
-  Tower lamp and buzzer
-  Pop-up rollers to prevent operator finger injury
-  Underguards (optional)
-  End sensor to prevent overflow/goods falling off (optional)

OPTIONAL UPGRADES

-  **Easy Control**
Joystick at the front with load, unload, stop, and emergency stop — single-operator use, no assistance needed.
-  **Hydraulic Tilting**
Optional hydraulic system to match container height — no expensive high docks required.
-  **LED Front Lights**
Built-in powerful LED lights for low-visibility and dark workspaces.

SPECIFICATIONS & NUMBERS

BELT WIDTH

600/800 millimetres

BELT TYPE

PVC (3 millimetres thickness)

STANDARD BELT SPEED

Variable 0 – 35 metres/minute

OPTIONAL BELT SPEED

Variable 0 – 50 metres/minute

EXTENSION SPEED

Variable 0 – 15 metres/minute

EXTENSION MOTOR




0.55 kW gear motor

BELT MOTOR


2.2kW Gear Motor

POWER

AC 3-phase 440V

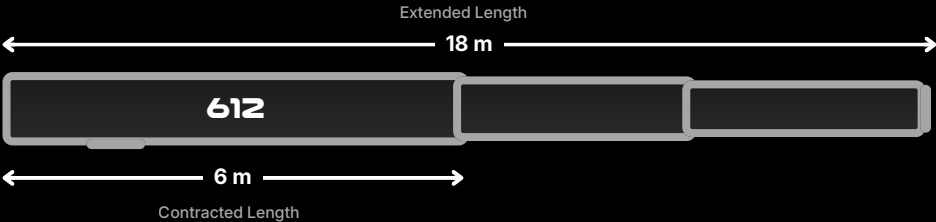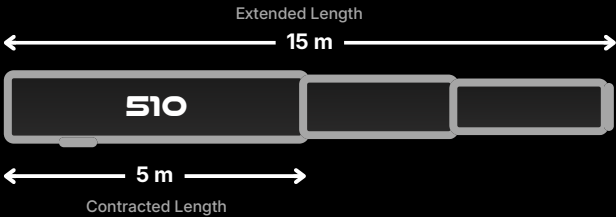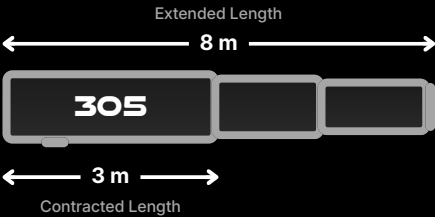

GENERAL APPLICATIONS

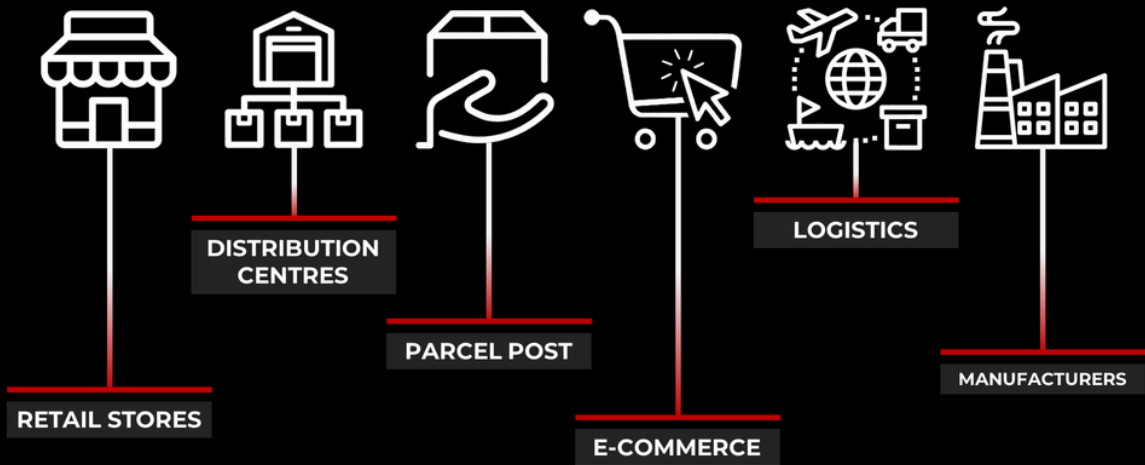



FERROUS

**TO BE OUR HAPPY CUSTOMER,
CONNECT WITH US AT:**

Website: www.ferrous.co.in/fapl

E-mail ID: fapl@ferrous.co.in

Phone number: +91 94221 36143