

Single STS3215 native PID | measured encoder response | no software outer PID


5 deg step | solid: +, dashed: -

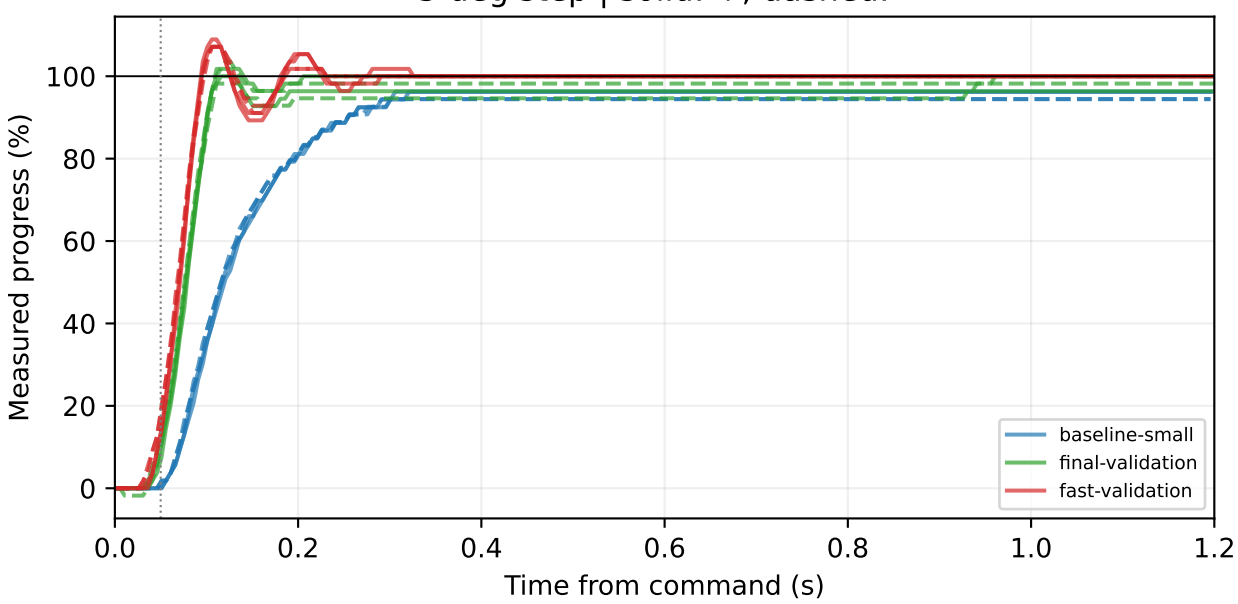


15 deg step | solid: +, dashed: -

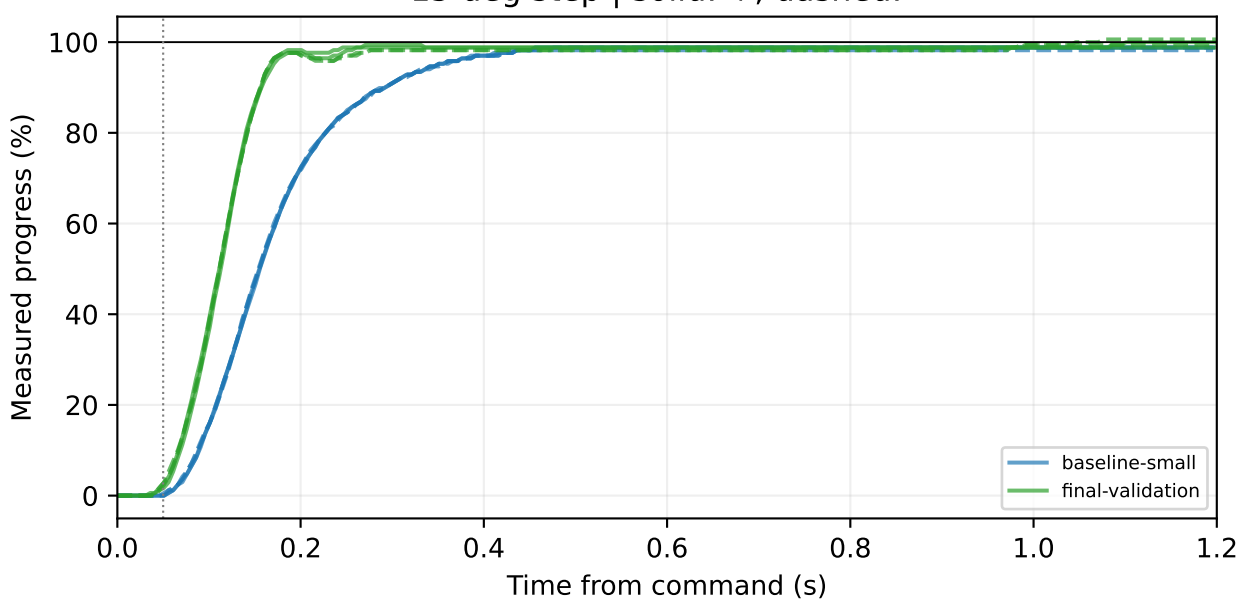


30 deg step | solid: +, dashed: -

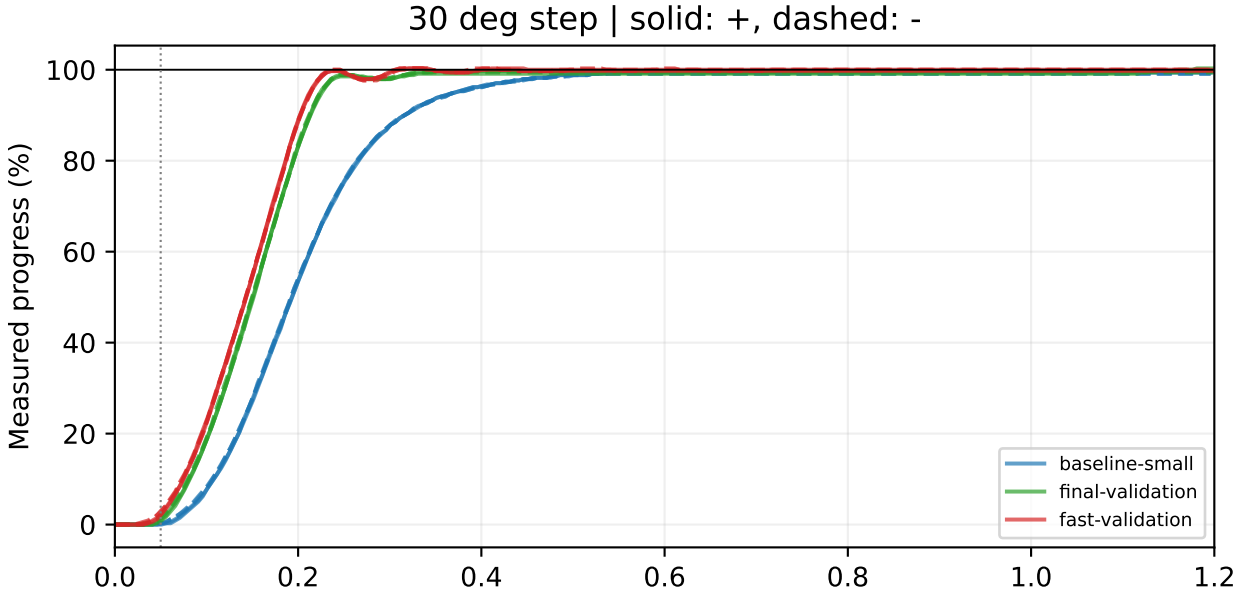


60 deg step | solid: +, dashed: -

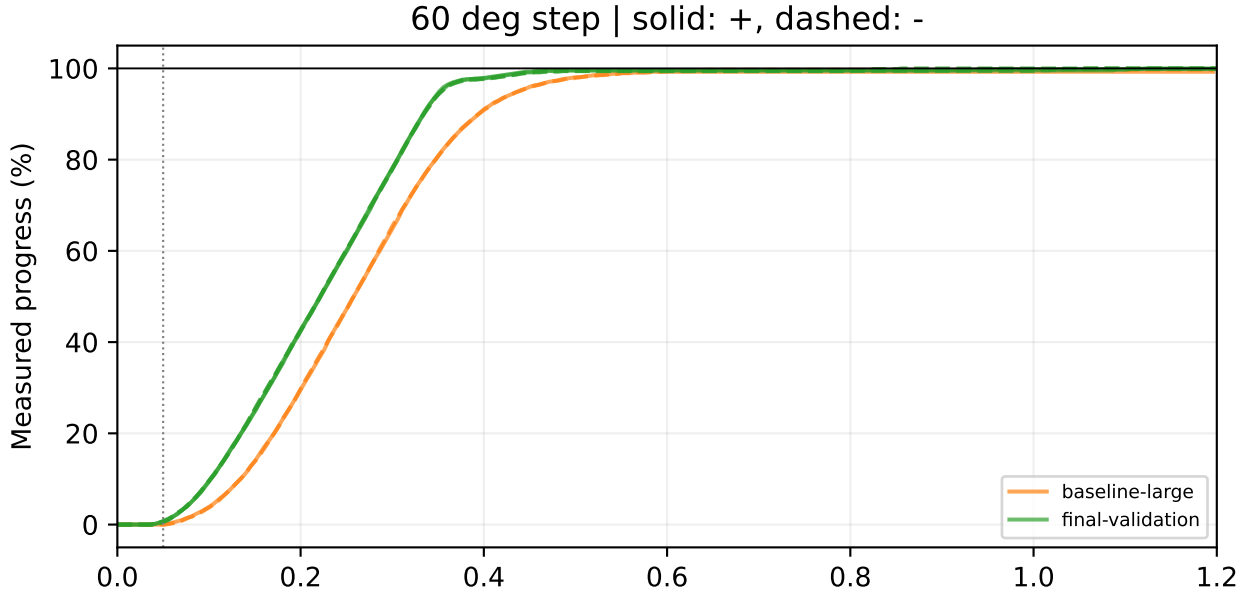

90 deg step | solid: +, dashed: -

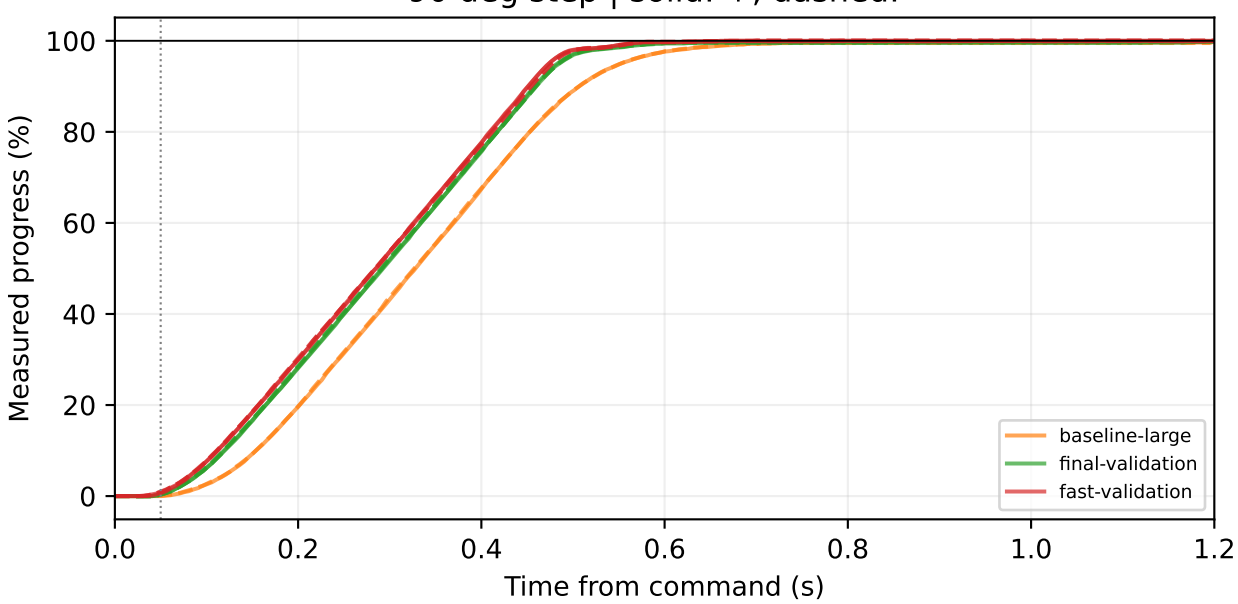

150 deg step | solid: +, dashed: -

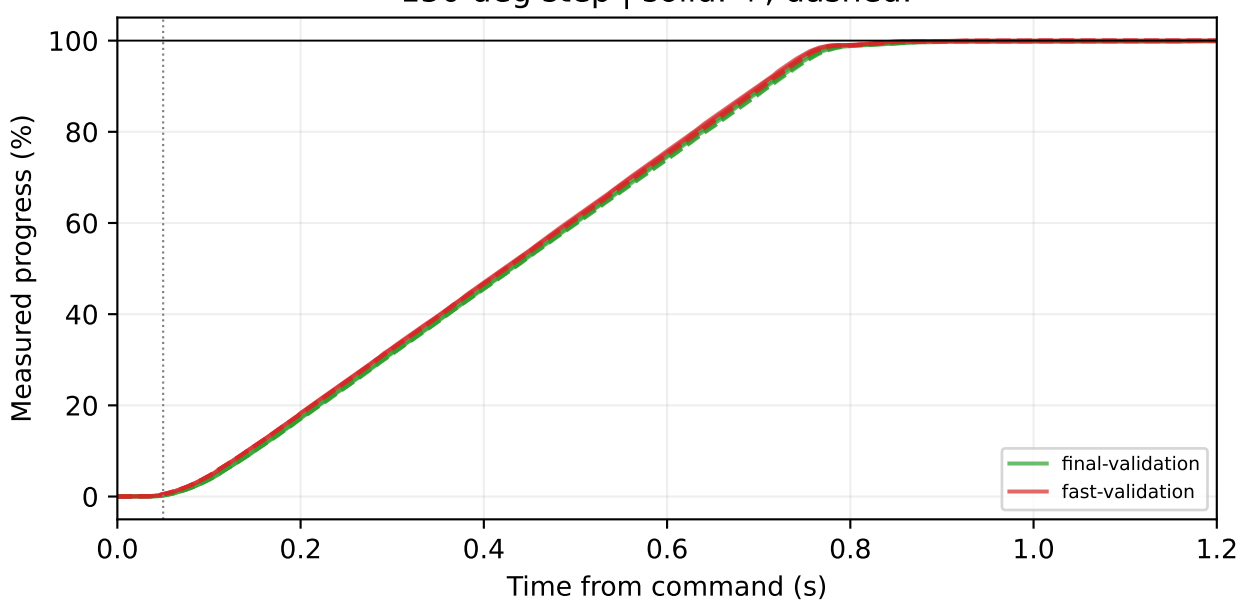

Return to user-defined encoder zero | settled window

