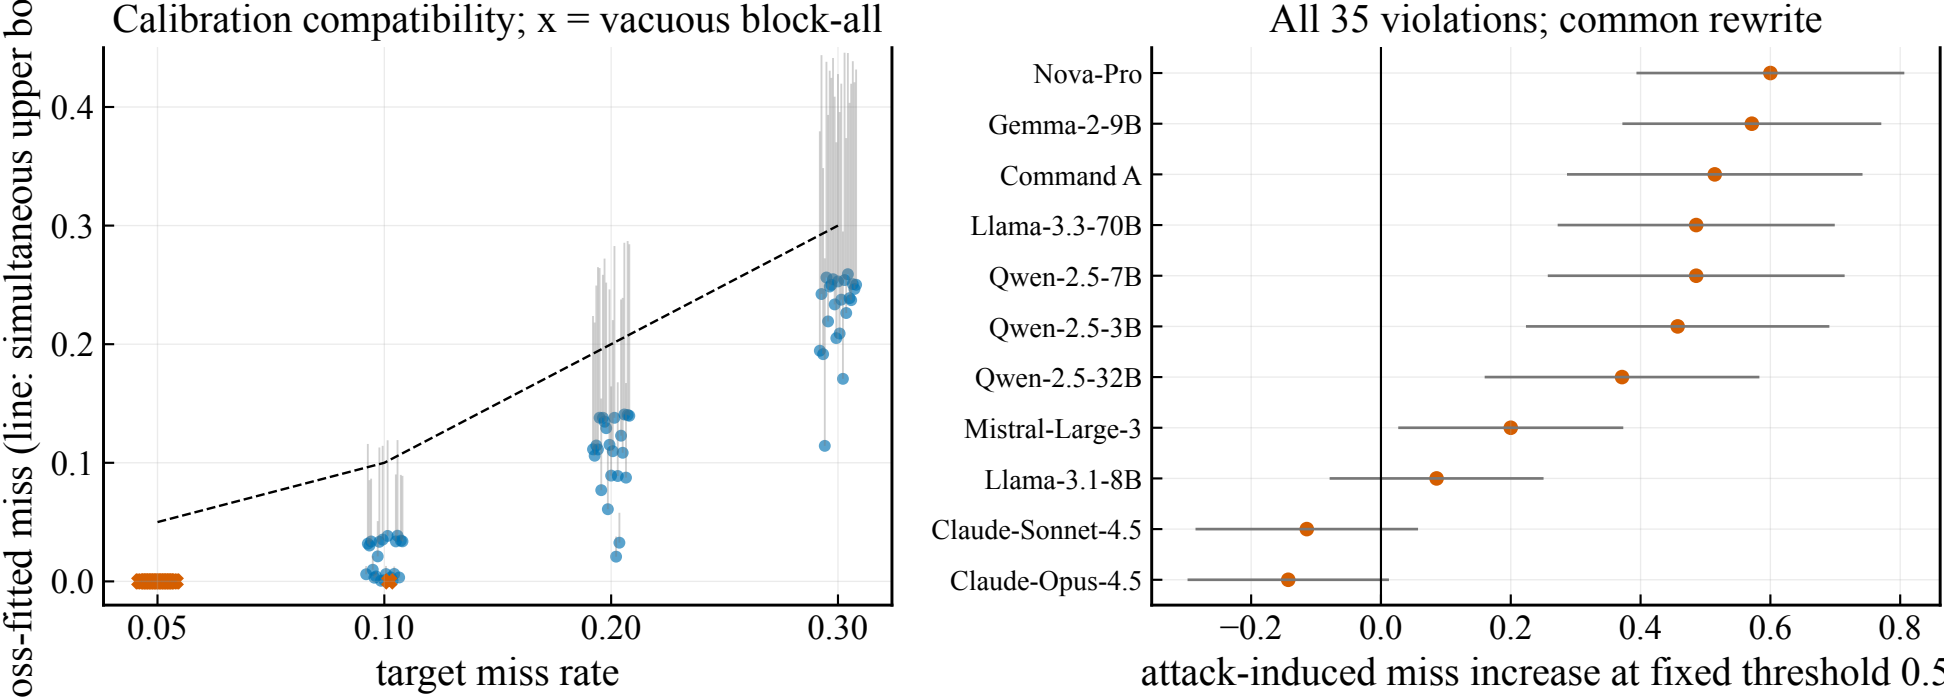
Calibration compatibility; x = vacuous block-all
oss-fitted miss (line: simultaneous upper bo
0.0
0.1
0.2
0.3
0.4
0.05
0.10
0.20
0.30
target miss rate
All 35 violations; common rewrite
Nova-Pro
Gemma-2-9B
Command A
Llama-3.3-70B
Qwen-2.5-7B
Qwen-2.5-3B
Qwen-2.5-32B
Mistral-Large-3
Llama-3.1-8B
Claude-Sonnet-4.5
Claude-Opus-4.5
−0.2
0.0
0.2
0.4
0.6
0.8
attack-induced miss increase at fixed threshold 0.5