
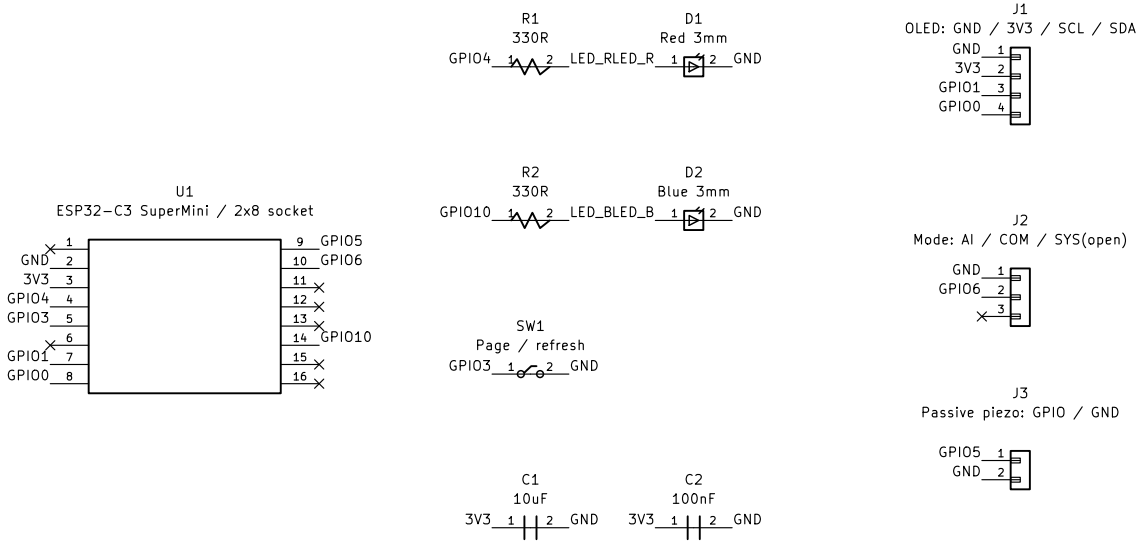


Firmware map: SDA=GPIO0, SCL=GPIO1, page=GPIO3, red=GPIO4, piezo=GPIO5, mode=GPIO6, blue=GPIO10.

Mode switch: AI shorts COM to GND; SYS leaves COM open for INPUT_PULLUP. OLED module is external.

Use a passive piezo disc on J3; do not connect a high-current magnetic buzzer directly to GPIO5.



QUARK

Sheet: /
File: QUARK_SuperMini_Carrier.kicad_sch

Title: QUARK ESP32-C3 SuperMini Carrier

Size: A4	Date: 2026-10-28	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1