




# Programming PIC16F913

The PIC32 organizes groups of General-purpose I/O, GPIO, pins into ports that are read and written together.

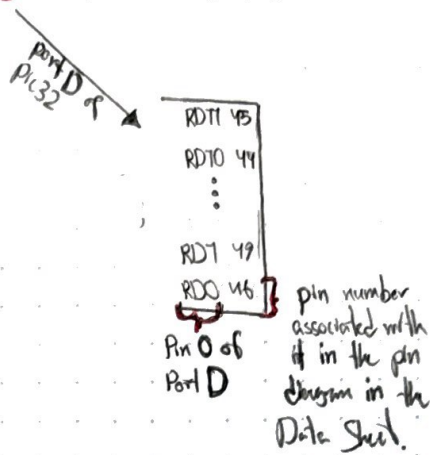

A port = a section of pins

Which pins to connect to what for flashing a MCU with PICkit4

PICkit 4

PIC16F913

MCLR → master clear

VDD → +5.0V

VSS → Ground

P6D → data (for PIC16 → ICSPDAT)

PGC → clock (" " → ICSPCLK)

LVP → won't be using in this tutorial

we should not forget to connect the pin master clear, MCLR, to 5.0V, otherwise our controller (PIC) will keep resetting.

**ST7789 1.8V 240x240 Pixels LCD** - Factory setting is set to 4-wire SPI

VCC → +3.5V

GND → Ground

\* DIN → Data Input

\* CLK → Clock

\* CS → Chip select

\* DC → Data/Command signal selection { HIGH → Data mode  
LOW → Command mode

\* RST →

BL → Back light (ändra spän. med en potentiometer)



