



# SERIAL FLASH

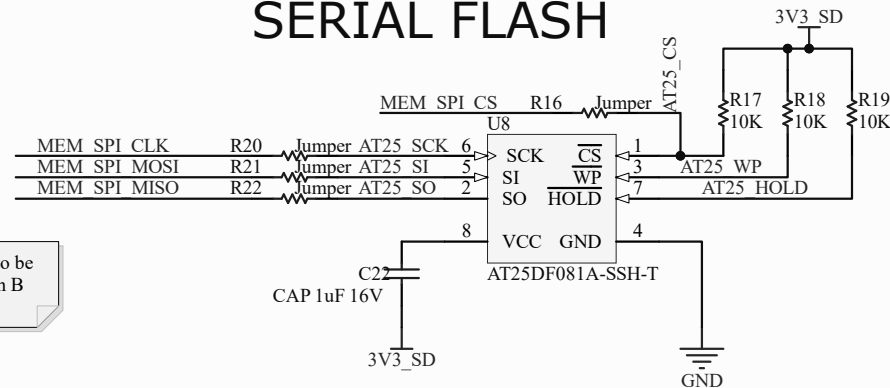

Serial Flash to be used as a plan B

## SD CARD


$\Delta$  VIN must be between 3.6V-5.5V

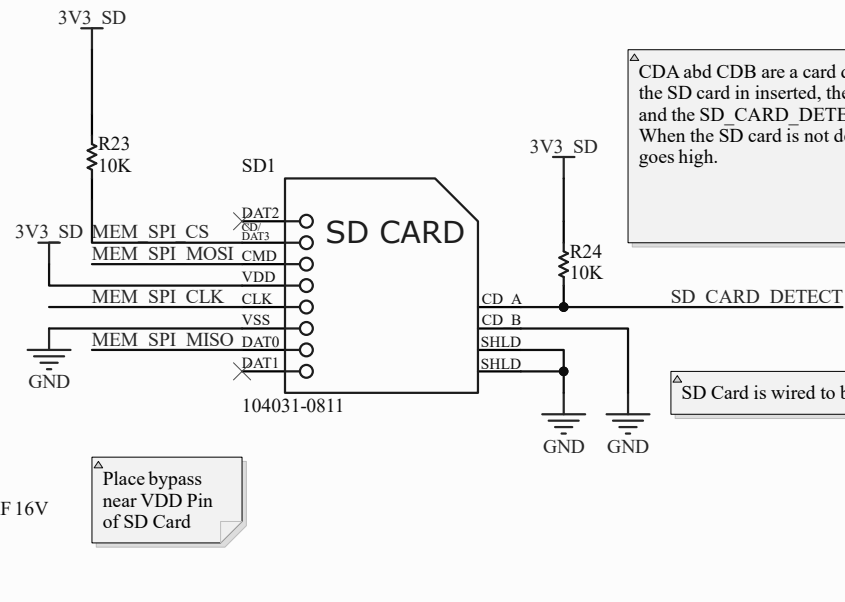

△ CDA and CDB are a card detect switch. When the SD card is inserted, the switch is closed, and the SD\_CARD\_DETECT line goes low. When the SD card is not detected, said line goes high.

<sup>Δ</sup> SD Card is wired to be used on SPI mode

## TESTPOINTS



Title		
Size A	Number	Revision
Date:	3/13/2021	Sheet of
File:	\\...\Memory.SchDoc	Drawn By: