




US 20210407717A1

(19) **United States**(12) **Patent Application Publication**
SHPIGELMACHER et al.(10) **Pub. No.: US 2021/0407717 A1**(43) **Pub. Date: Dec. 30, 2021**(54) **MAGNETIC PROPULSION SYSTEM FOR
MAGNETIC DEVICES****Related U.S. Application Data**(60) Provisional application No. 62/755,660, filed on Nov.
5, 2018.(71) Applicant: **BIONAUT LABS LTD.**, Herzliya (IL)(72) Inventors: **Michael SHPIGELMACHER**, Los
Angeles, CA (US); **Alexander**
SROMIN, Ashdod (IL); **John**
CAPUTO, Los Angeles, CA (US);
Eran OREN, Tel Aviv (IL); **Eli VAN**
CLEVE, Los Angeles, CA (US); **Nadav**
COHEN, Haifa (IL); **Amir GERON**,
Modi'in (IL); **Dennis SEELY**, San
Diego, CA (US); **Alex KISELYOV**,
San Diego, CA (US)**Publication Classification**(51) **Int. Cl.**
H01F 7/02 (2006.01)
H02K 41/03 (2006.01)
(52) **U.S. Cl.**
CPC **H01F 7/0273** (2013.01); **H02K 41/031**
(2013.01)(73) Assignee: **BIONAUT LABS LTD.**, Herzliya (IL)(21) Appl. No.: **17/291,078**(22) PCT Filed: **Oct. 31, 2019**(86) PCT No.: **PCT/US19/59096**

§ 371 (c)(1),

(2) Date: **May 4, 2021**(57) **ABSTRACT**

This invention relates to apparatus for creating a magnetic field to propel a magnetic device within a diverse media including biological matrices, tissues, organs, animals and humans. In one embodiment, a cylindrical dual Halbach array provides a uniform magnetic field with a settable field direction. Another embodiment provides support and orientation apparatus for a controlled-gradient conical magnet to achieve a full 4π steradian solid angle coverage around the specimen.

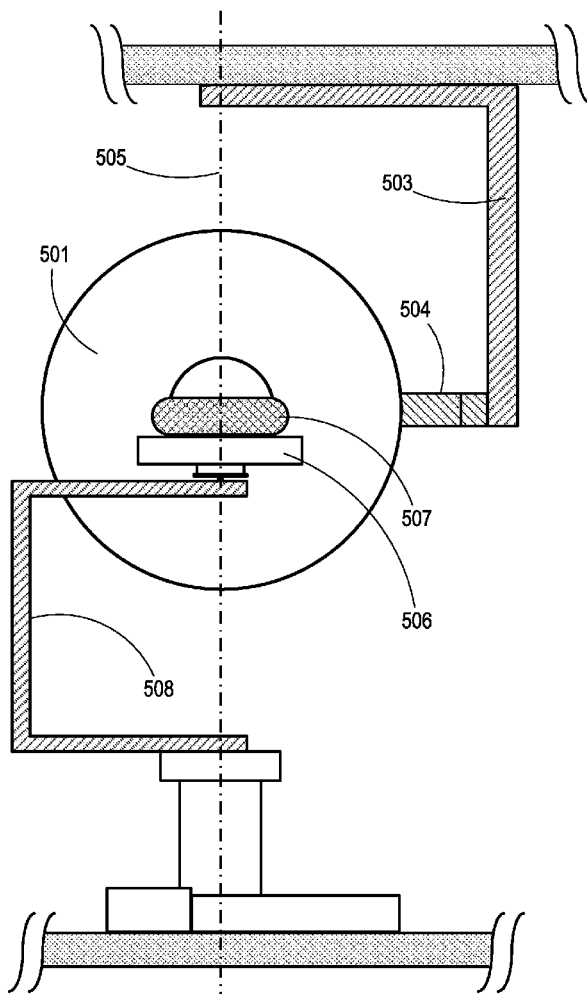

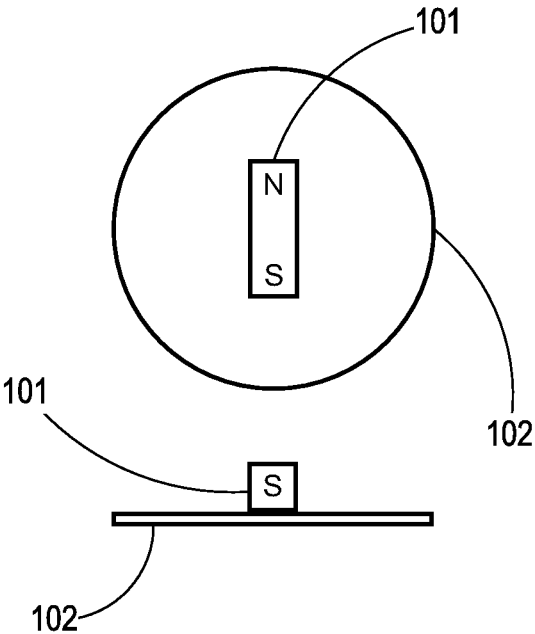


FIG. 1A

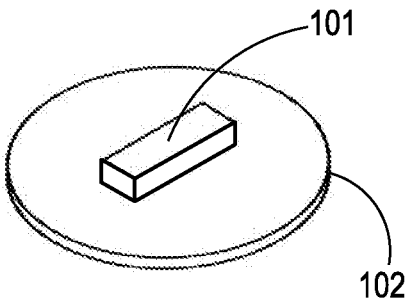


FIG. 1B

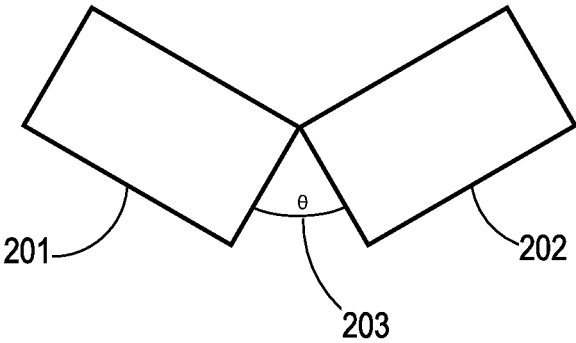


FIG. 2

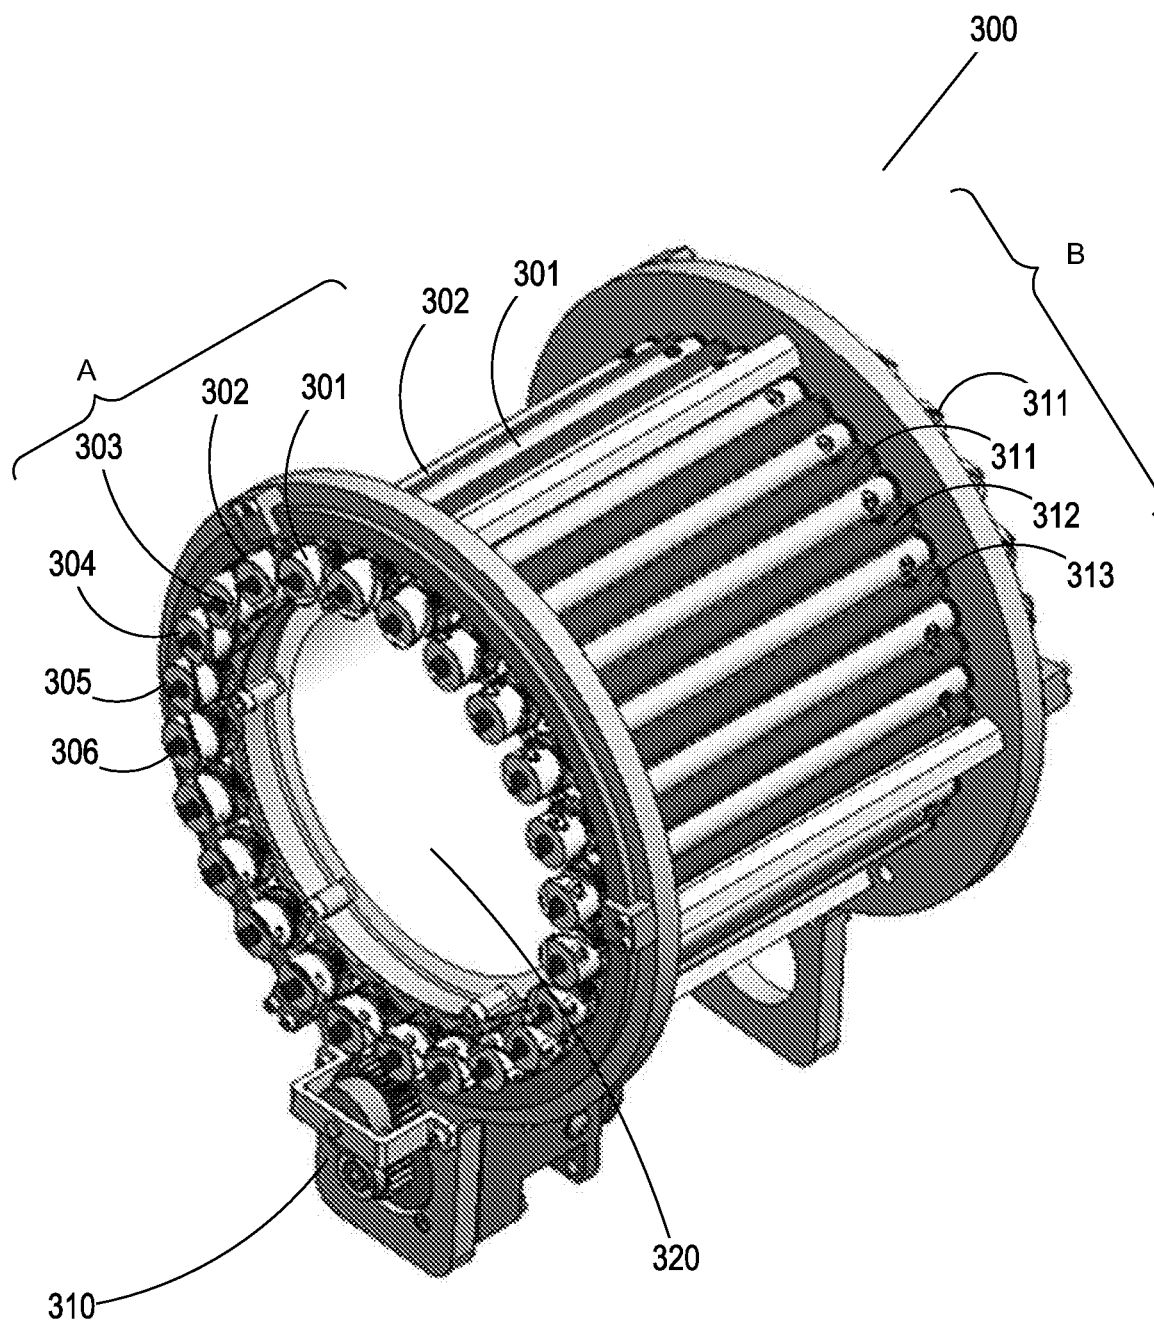


FIG. 3

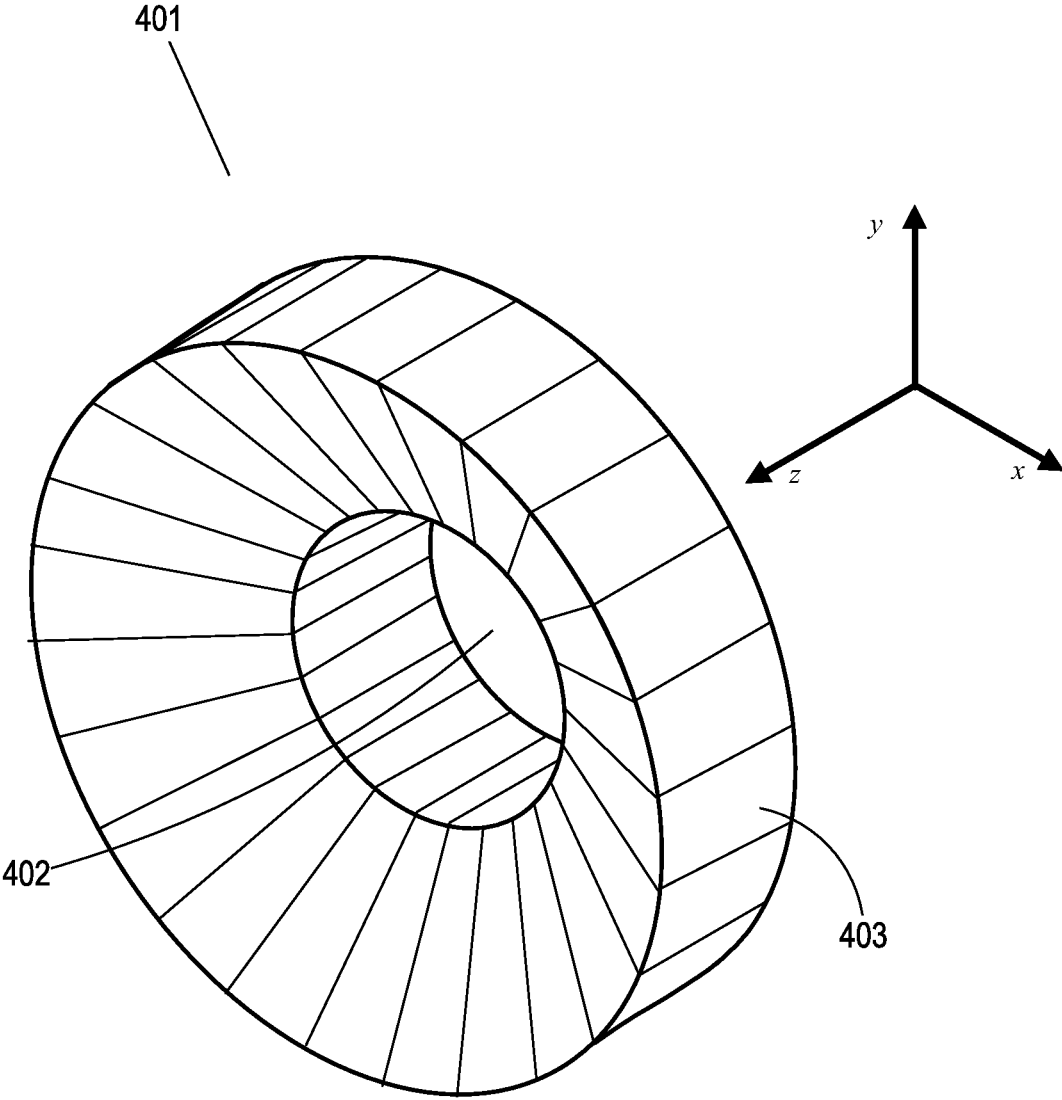


FIG. 4



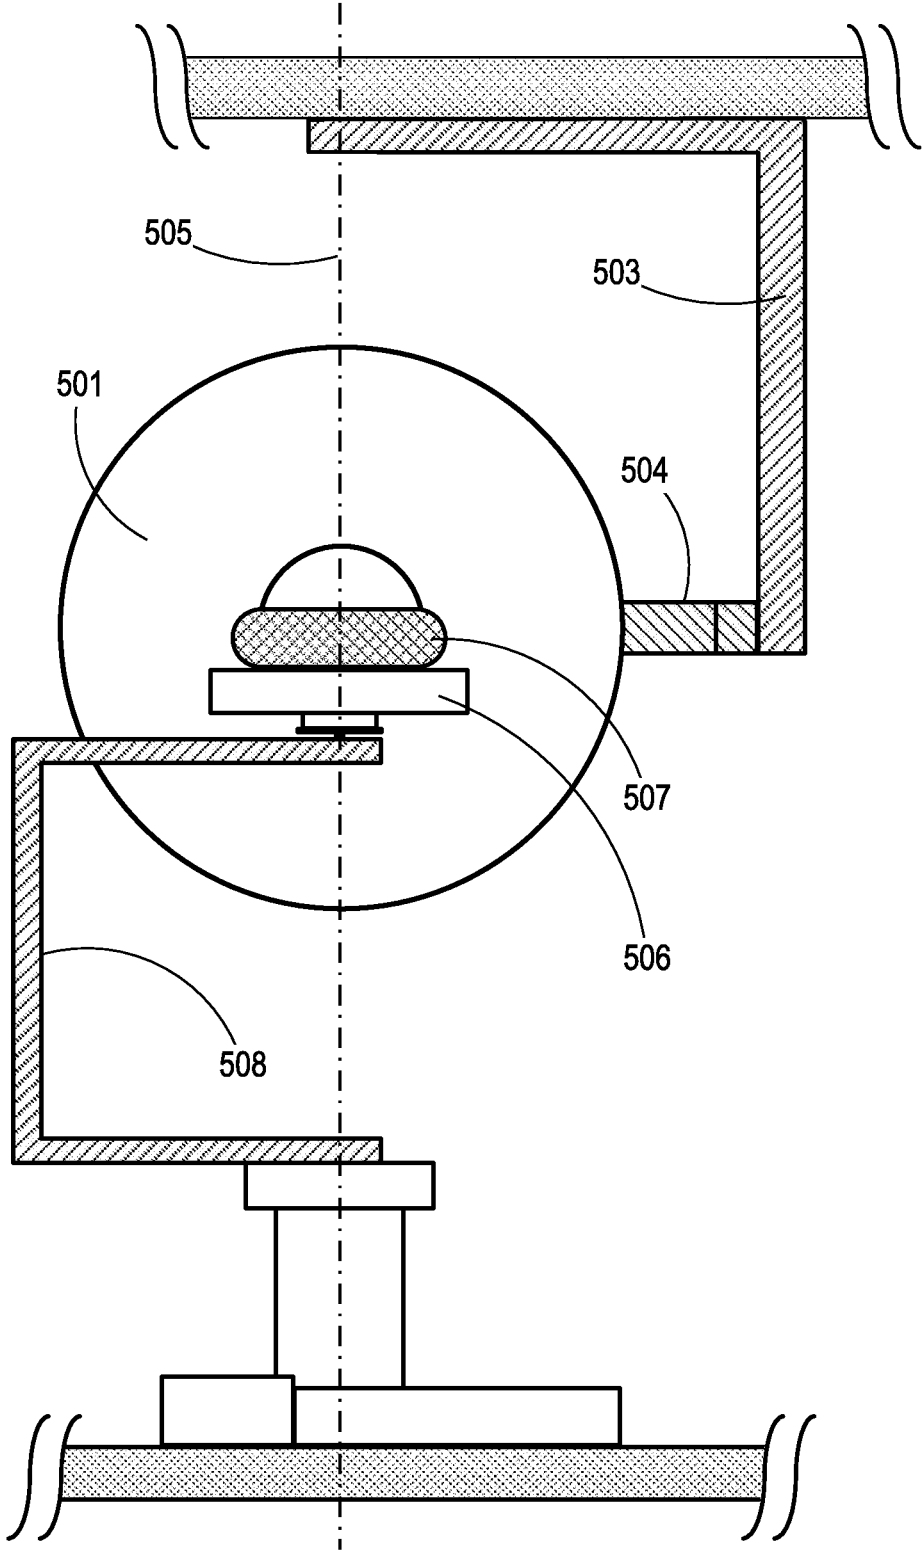


FIG. 6A

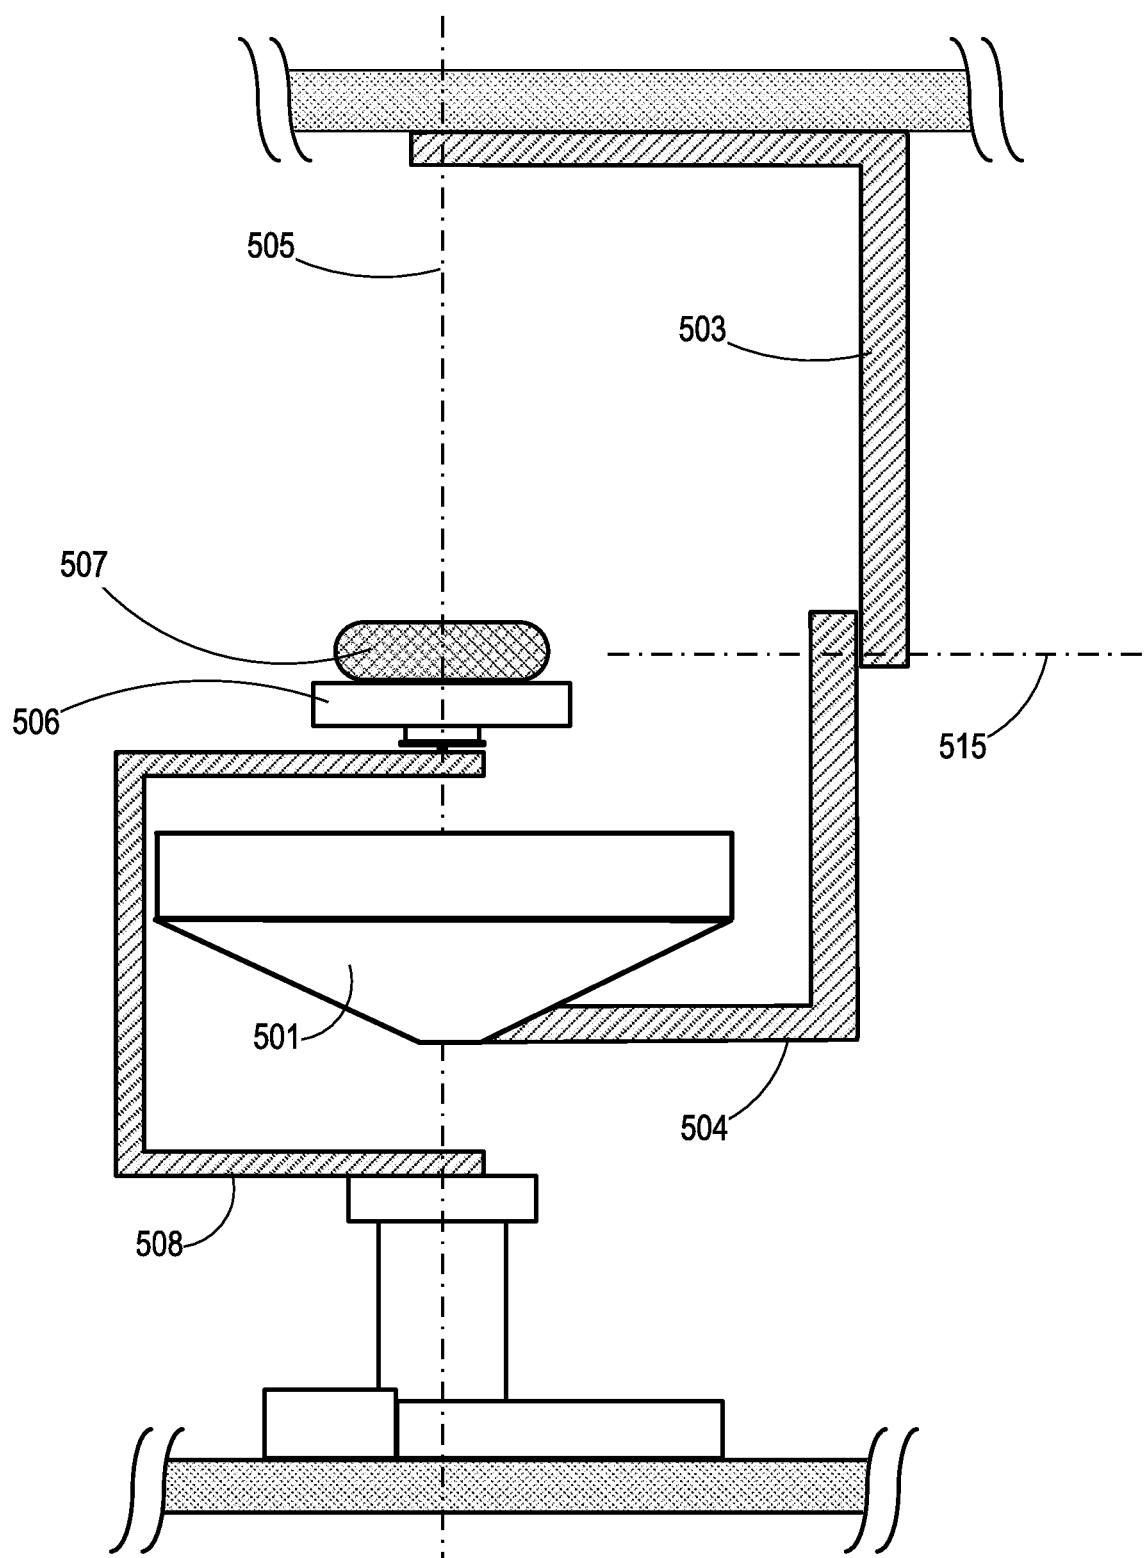


FIG. 6B

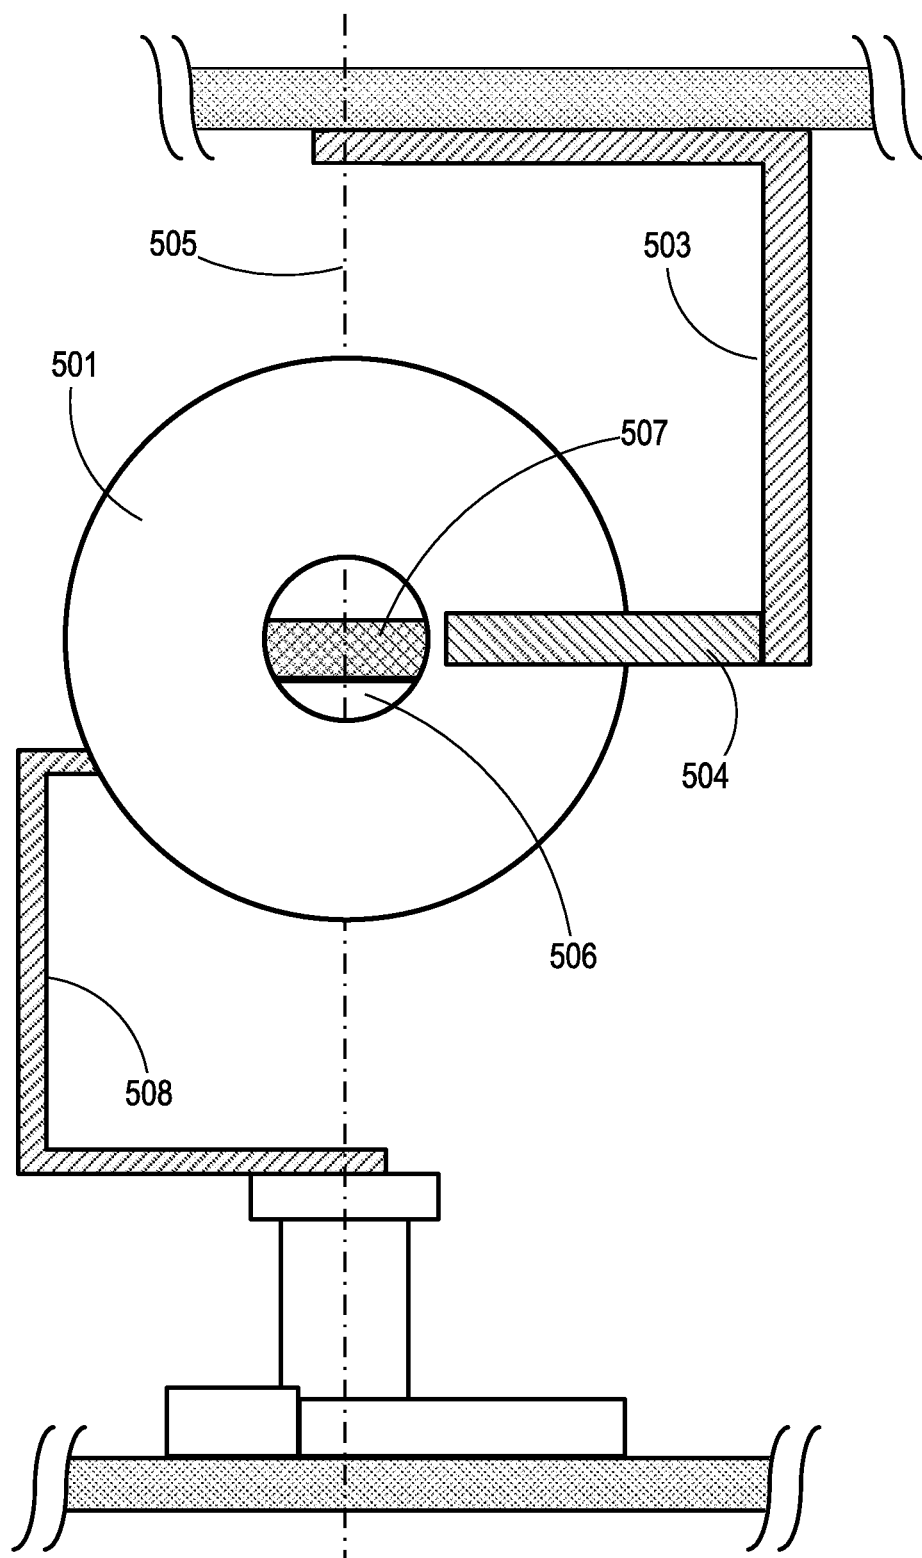


FIG. 6C

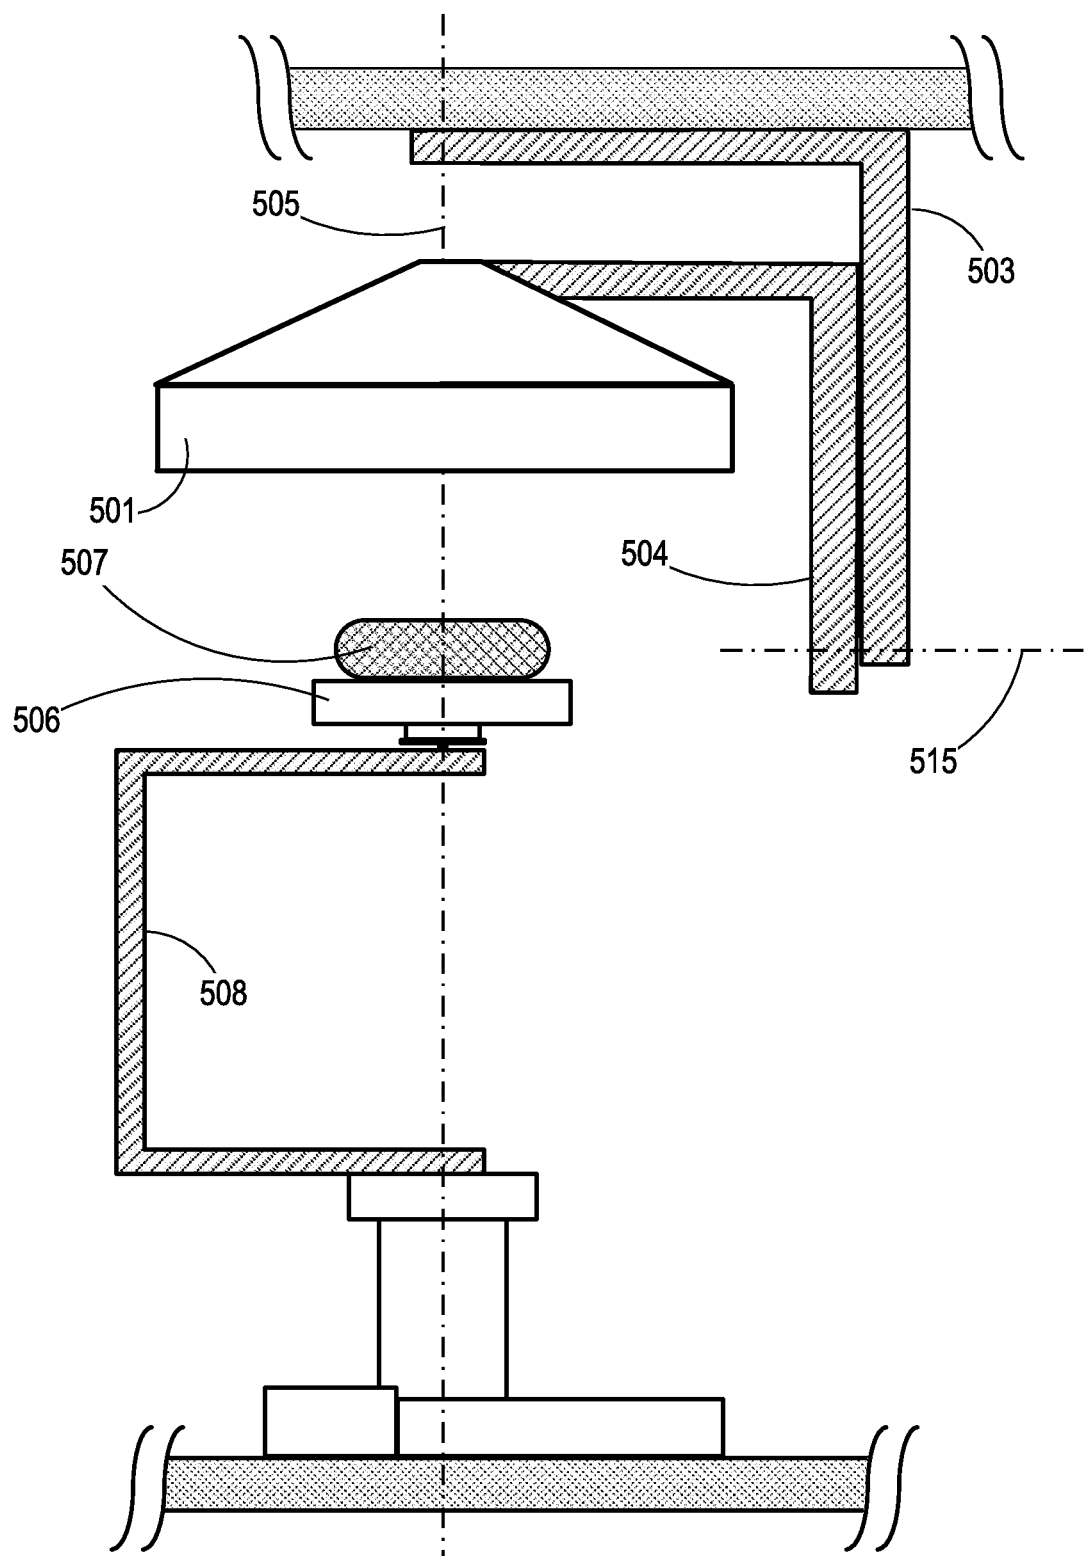


FIG. 6D

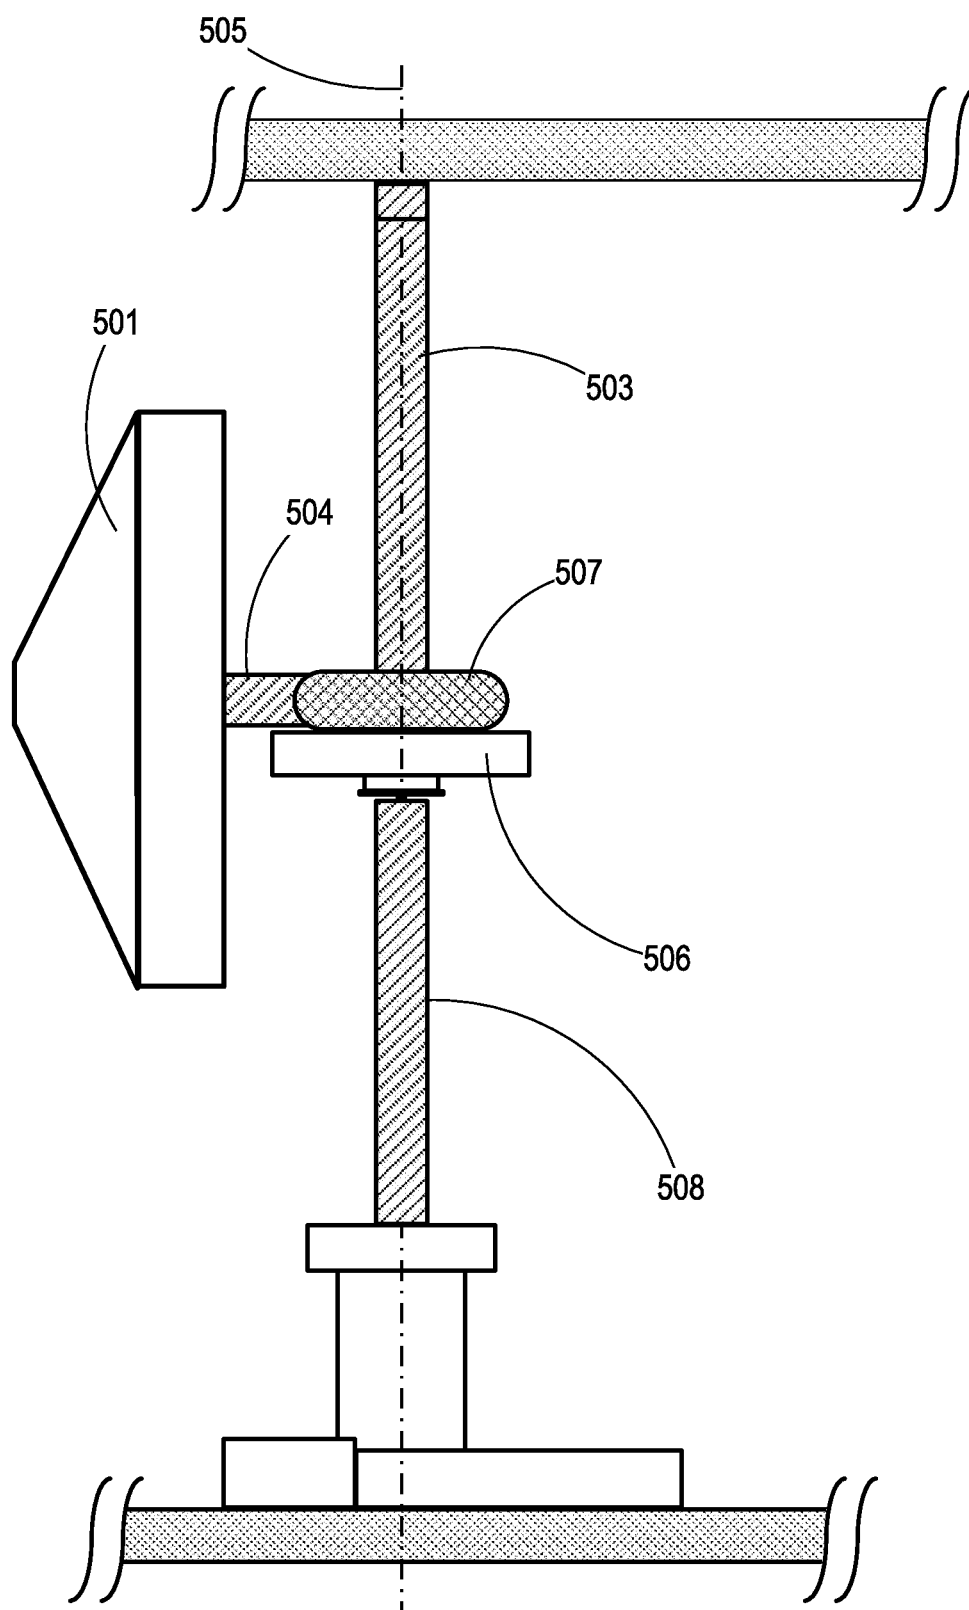


FIG. 6E

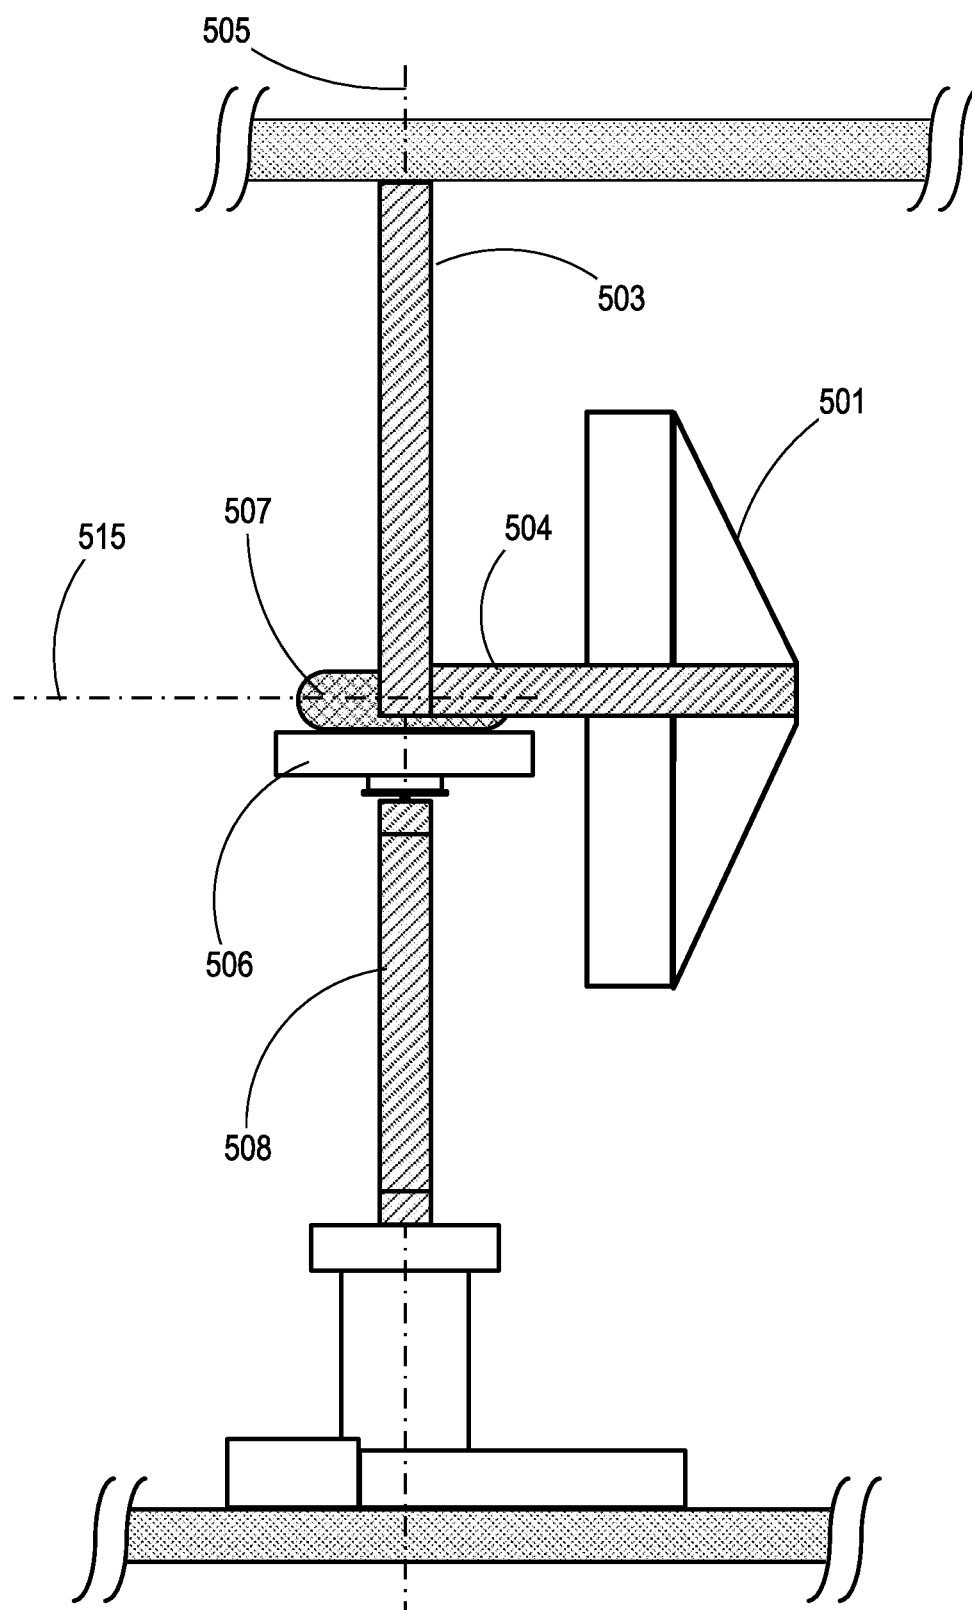


FIG. 6G

MAGNETIC PROPULSION SYSTEM FOR MAGNETIC DEVICES

RELATED APPLICATIONS

[0001] This application is related to U.S. Provisional Patent Application Ser. No. 62/697,044, filed Jul. 12, 2018, titled “MAGNETIC PROPULSION SYSTEM FOR MAGNETIC DEVICES,” and U.S. Provisional Patent Application Ser. No. 62/666,536, filed May 3, 2018, titled “HYBRID ELECTROMAGNETIC DEVICE FOR REMOTE CONTROL OF MICRO-NANO SCALE ROBOTS, MEDICAL TOOLS AND IMPLANTABLE DEVICES,” each of which is incorporated by reference herein in its entirety.

FIELD

[0002] This invention relates to apparatus for creating a magnetic field to externally propel a magnetic device within a matrix of material, such as a viscous medium in a biological tissue.

BACKGROUND

[0003] In many medical applications, it can be useful to have a miniaturized mobile device (herein denoted as a “bot”) to move in a medium such as found in a biological organism. For example, it may be desirable to move an internal device through tissue to a particular anatomic location to release a drug, gather diagnostic data, or conduct a remote-controlled surgical procedure. To facilitate such movement, propulsion and navigation utilizing magnetic fields has been developed.

[0004] One mode of propulsion involves applying an external uniform rotating magnetic field on internal device located inside the body. According to this mode, the internal device has a helical or a related shape (screw-like) exhibiting asymmetry and it comprises an embedded magnet with diametric magnetization. Rotating the external field exerts congruent rotational torque on the device, propelling it forward (like a screw). It is expected that reversing the external rotational field direction will yield a respective reverse particle dynamics. This propulsion method is denoted as “rotation.”

[0005] Another propulsion mode involves applying an external non-uniform magnetic field (a “magnetic gradient”) performing increasing strength along a controllable line (a “gradient line”) to an internal device located inside the body. The device includes an embedded magnet or a metallic component. In response to the external field gradient, the device moves along the gradient lines generated by the external magnet. This propulsion method is denoted as “gradient-based motion.”

[0006] A combination of the two above propulsion techniques are required to properly propel the bot through the tissue as each propulsion mode impacts the bot differently.

[0007] It is worth noting that the same magnetic system can be used to control other types of functionality of the bot remotely using a combination of magnetic field rotation and/or magnetic gradient, applied at a predefined time at a particular configuration, in parallel or separately from the propulsion of the bot. For example, in one embodiment the bot may contain an internal magneto-mechanic mechanism which extrudes a particular payload to the surrounding

matrix in response to a predefined magnetic gradient or a predefined rotation of the external magnetic field generated by the magnetic system.

SUMMARY

[0008] Various embodiments of the present invention provide external apparatus that establishes a variable magnetic field to manipulate a bot, for example, to propel a bot through a matrix of interest or to expel or deliver a payload from the bot into a matrix of interest. Such a matrix of interest includes, but is not limited to, a media, extracellular matrix, a compartment, tissue, organ, blood, lymph, biliary or cerebrospinal fluid in the region of the magnetic field.

[0009] The term “magnet” herein denotes any object having a magnetic field. In particular, a combination of individual magnets, including an “array” of individual magnets is herein itself considered a “magnet”. In some descriptions herein, a distinction is made between an “individual magnet” and an “array of magnets”, but it is understood that an “array of magnets” is also considered to be a “magnet”.

[0010] The term “propel” herein denotes the causing of any kind of physical motion, including, but not limited to: rotation, translation, vibration, oscillation, and combinations thereof.

[0011] The term “creating and manipulating a magnetic field” herein denotes making any changes to a magnetic field in a region, including, but not limited to: introducing a magnetic field into the region; moving a magnetic field from one place to another; and varying the intensity, flux, direction, and/or polarity of a magnetic field in the region.

[0012] According to certain embodiments, the external apparatus includes features such as:

[0013] a permanent field magnet;

[0014] multiple permanent field magnets;

[0015] an array of permanent field magnets arranged in a particular topological fashion to meet requirements such as: a specific field strength, field gradient/directionality as a function of distance, and trajectory away from the array.

[0016] An array of magnet may also include electromagnets which may or may not be composed of copper, aluminum or superconducting material exemplified by but not limited to NbTi.

[0017] An array according to a related embodiment is affixed, directly or indirectly, to a structural member, including but not limited to a platform, support, bracket, orienting apparatus, disk or other defined surface.

[0018] In another related embodiment, the magnet or array of magnets is attached to a mobility device having a motor to provide motion of the magnet or array, non-limiting examples of such motion including: rotation, cyclic motion (angular regular or irregular “rocking”; translational oscillation; and other such motion); vibration; trajectory motion (such as orbitally-circling a region); and combinations thereof.

[0019] As noted previously, a device according to various embodiments of the invention moves a bot via a torque, a linear force, and/or combinations thereof, wherein the torques and linear forces are applied via a magnetic field established by permanent magnets and arrays and/or electromagnets which are prepared and arranged as disclosed herein.

[0020] According to certain embodiments, the function of torque applied to a bot is to overcome friction of the bot

against surrounding media (such as diverse matrices, biological tissues and compartments) or other propulsion resistance forces, while the linear force propels the bot through the media itself. A rotating magnetic field perpendicular to the direction of bot motion provides torque on the bot, while a controlled gradient of that same field amplitude along the direction of desired bot motion, provides a linear attractive force on the bot.

[0021] According to an embodiment of the present invention, there is provided a system for creating and manipulating a magnetic field to propel a magnetic device in a specimen, the system comprising: (a) a cylindrically-disposed plurality of rod shaped or related magnets enclosing a hollow space to include the analyte, matrix, subject or specimen of interest, each rod magnet thereof having a transverse magnetization; (b) wherein the plurality of rod shaped or related magnets form an array including but not limited to a Halbach array which includes: (c) a first array of rod magnets; and (d) a second array of rod magnets; (e) wherein the first array of rod magnets and the second array of rod magnets are interleaved in an alternating fashion such that magnets from the first array always have magnets from the second array as their nearest neighbors; (f) and could be manipulated to: (g) alter positioning of all the magnets of the first array; and (h) alter positioning of all the magnets of the second array; (i) wherein the dynamics of the magnets of the first array is independent of the dynamics of the magnets of the second array.

[0022] In addition, according to another embodiment of the present invention, there is further provided a device for creating and manipulating a magnetic field to propel a magnetic device in a specimen including but not limited to an ex vivo matrix, biological specimen as exemplified by blood, lymph, bile, spinocerebral fluid, tissue, organ or compartment, the device comprising: (a) a magnet for creating the magnetic field; (b) a stage for holding the specimen; (c) support and orienting apparatus for the magnet, to which the magnet is attached; (d) support and orienting apparatus for the stage, to which the stage is attached; and (e) at least one positioning drive apparatus containing a motor; (f) controlling mechanism, wherein: (g) the support and orienting apparatus for the magnet includes at least a first rotatable offset bracket; and (h) the support and orienting apparatus for the stage includes at least a second rotatable offset bracket; (i) wherein the second rotatable offset bracket is rotated according to a position of the first rotatable offset bracket, so as to allow the first rotatable offset bracket to rotate to any angular position without having the magnet blocked by the second rotatable offset bracket, (j) such that the system is operative to orient the magnet over a solid angle of 4π steradians with respect to the stage.

[0023] In addition, so far as the embodiment of the previous device, in which the stage holding the specimen may also be placed inside the magnet and the magnet may therefore be rotated 4π steradians with respect to the stage.

[0024] The current embodiments of the invention have the current advantages: (a) Gradient to mediate reliable, reproducible motion at considerable distances, (b) Versatility in a combination with mechanical component: 2D/3D options, (c) Feasible size, safety, modular nature, applicability to studies of diverse matrices including animals, (c) Ability to accommodate i) diverse particles, ii) imaging, iii) delivery and retraction, iv) other (micro)devices used in (micro)

manipulation including microsurgery, (d) Facile integration into a platform along with other modules.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The subject matter regarded as the invention is particularly pointed out and distinctly claimed herein. Embodiments of the invention, however, both as to organization and method of operation, together with objects, features, and advantages thereof, may best be understood by reference to the following detailed description when read with the accompanying drawings in which:

[0026] FIG. 1A illustrates a magnet on a yoke, according to an embodiment of the invention.

[0027] FIG. 1B is an isometric view of the magnet on a yoke of FIG. 1A.

[0028] FIG. 2 illustrates a pair of similar magnets having a predetermined angular displacement, according to an embodiment of the invention.

[0029] FIG. 3 illustrates a cylindrical arrangement of Halbach arrays, with a dual independent synchronizing mechanism, according to an embodiment of the present invention.

[0030] FIG. 4 is an isometric view of a conical magnet according to an embodiment of the present invention.

[0031] FIG. 5A illustrates a support mounting and orienting apparatus for the conical magnet of FIG. 4, according to an embodiment of the present invention.

[0032] FIG. 5B illustrates a stage for a specimen under investigation (SUI), and accompanying support and positioning apparatus, according to an embodiment of the present invention, for use with the conical magnet and support mounting and orienting apparatus of FIG. 5A.

[0033] FIG. 6A illustrates the conical magnet support mounting and orienting apparatus of FIG. 5A in conjunction with the SUI stage and support and positioning apparatus of FIG. 5B, with the conical magnet oriented behind the SUI, according to an embodiment of the invention.

[0034] FIG. 6B illustrates the configuration of FIG. 6A as arranged with the conical magnet oriented below the SUI, according to an embodiment of the invention.

[0035] FIG. 6C illustrates the configuration of FIG. 6A as arranged with the conical magnet oriented in front of the SUI, according to an embodiment of the invention.

[0036] FIG. 6D illustrates the configuration of FIG. 6A as arranged with the conical magnet oriented above the SUI, according to an embodiment of the invention.

[0037] FIG. 6E illustrates the configuration of FIG. 6A as arranged with the conical magnet oriented to the left of the SUI, according to an embodiment of the invention.

[0038] FIG. 6F illustrates the configuration of FIG. 6A as arranged with the conical magnet oriented in front of the SUI, according to an embodiment of the invention.

[0039] FIG. 6G illustrates the configuration of FIG. 6A as arranged with the conical magnet oriented to the right of the SUI, according to an embodiment of the invention.

[0040] It will be appreciated that for simplicity and clarity of illustration, elements shown in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the elements may be exaggerated relative to other elements for clarity. Further, where considered appropriate, reference numerals may be repeated among the figures to indicate corresponding or analogous elements.

DETAILED DESCRIPTION

[0041] In the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known methods, procedures, and components have not been described in detail so as not to obscure the present invention.

[0042] FIG. 1A illustrates a permanent bar magnet **101** mounted on a disk-shaped ferromagnetic yoke **102** according to an embodiment of the invention. In related embodiments, yoke **102** takes other shapes. According to further embodiments of the invention, yoke material is steel. In still other embodiments, bar magnet **101** is a stack of individual magnets. FIG. 1B shows an isometric view of bar magnet **101** on yoke **102**.

[0043] FIG. 2 illustrates a magnet **201** in proximity to a similar magnet **202**, wherein the two magnets have a pre-determined angular displacement θ **203**. In a related embodiment, the angular displacement θ is 60° , which in some cases maximizes the field strength for magnets of a given weight and composition.

[0044] FIG. 3 illustrates a cylindrical arrangement **300** of Halbach arrays, with a dual independent synchronizing mechanism, according to an embodiment of the present invention, to make and use a system for creating and manipulating a magnetic field to propel a magnetic device in a specimen. In this embodiment, arrangement **300** has two independent Halbach arrays, herein denoted as array A and array B, respectively. Each element of a Halbach array is in the form of a rod shaped or alternative magnet having a transverse magnetization, so that rotating a magnet changes the direction of its magnetic field. The term “rod magnet having a transverse magnetization” herein denotes a rod-shaped or related magnet, being a cylinder like object whose length is greater than its diameter, and whose magnetic field lines lie substantially in planes orthogonal to the axis of the said cylinder, such that the poles of the magnet are on the curved exterior surfaces of the cylinder. The magnets are cylindrically-disposed to enclose a hollow space **320**, which can accommodate a specimen treated with a nano or micro device featuring magnetic properties. The magnets of the two arrays are interleaved, as shown for two representative samplings in FIG. 3. Rod or rod like magnets **301**, **302**, **303**, **304**, **305**, and **306** belong to array A, whereas rod or rod like magnets **311**, **312**, and **313** belong to array B, and the two arrays are interleaved, such that every magnet of array A lies between two magnets of array B, and every magnet of array B lies between two magnets of array A. In FIG. 3, array A magnets are shown as light-colored, whereas array B magnets are shown as dark colored. For the sake of illustration, a motor drive **310** moves the gears that rotate all array A magnets simultaneously, and independently rotate all array B magnets in a related fashion, for example simultaneously. The gear drives for array B are on the back side of Halbach array **300**, and are related in construction to those of array A, which are visualized in FIG. 3. The Halbach array of FIG. 3 establishes a relatively uniform field in internal space **320**.

[0045] FIG. 4 illustrates a conical magnet **401** with a hollow internal space **402**, according to an embodiment of the invention. In a related embodiment, conical magnet **401** is made of individual segments, one of which is shown as a segment **403**. According to these embodiments, magnet **401**

is characterized by a 3-dimensional gradient, and specimens can be placed inside of the resulting hollow internal space **402**.

[0046] One of the key features provided by embodiments of the present invention is the ability to position magnet **401** at any desired location around a specimen, and to move magnet **401** continuously in any trajectory from that location to any other location. Mathematically, this requires being able to move magnet **401** continuously over a complete solid angle of 4π steradians. The described dynamics is accomplished by the apparatus shown in FIGS. 5A, and 5B; and illustrated in different arrangements providing 4π steradian coverage in FIG. 6A through FIG. 6G. In related embodiments of the invention, motion over the 4π steradian range includes cyclic motion, rocking, vibration, oscillation, and other repetitive movement.

[0047] In the following description, a system for positioning and orienting a magnet to propel a magnetic device in a specimen is described and illustrated for clarity in the specific case of a conical magnet. It is understood that this is a non-limiting example; in related embodiments, the same apparatus is used to position and orient other magnetic devices, including, but not limited to magnets of other shapes and having other field distributions, and arrays of magnets.

[0048] It is also contemplated that devices with a magnetic component for use in systems according to embodiments of the present invention will include devices described in International Patent Application PCT/US2018/030960 filed on May 3, 2018 and titled “METHODS AND SYSTEMS TO CONTROL PARTICLES AND IMPLANTABLE DEVICES,” which is hereby incorporated by reference in its entirety. Briefly, such devices with a magnetic component are microelectromechanical (MEM) devices, which comprise: (i) an actuator; (ii) a responsive element; (iii) a sensor; and (iv) an electronic circuit; wherein: said actuator controls and operates said responsive element; said electronic circuit controls said actuator; and said sensor receives signals transmitted by a remote unit. It is also contemplated that systems according to embodiments of the present invention will be included in the platforms described in International Patent Application PCT/US2018/030960. Briefly, such platforms comprise the following modules: (a) one or more devices with a magnetic component and comprising embedded logic and various MEM components; (b) a delivery and/or retraction module, configured to deliver and/or retract the devices; (c) an external signal generator; (d) an imaging module, configured to monitor said particles; and (e) an integration module configured to receive inputs from and to provide output control commands to other modules; wherein: said modules are configured to interact/communicate with each other; and said modules are internally controlled, externally controlled or both; and wherein said platform provides active, pre-determined, fully controlled, precise delivery of said devices in vitro, in vivo, and/or in a patient.

[0049] FIG. 5A illustrates a support mounting and orienting apparatus for a conical magnet **501**, according to an embodiment of the present invention. An upper structural member **502** supports the entire weight of the apparatus and provides stability for the elements that hang from it. A rotatable offset bracket **503** pivots around a vertical axis **505**. The pivoting of offset bracket **503** is provided by a positioning drive apparatus containing a motor (not shown),

which is able to rotate offset bracket **503** around a vertical axis **505** to any desired angular position. Attached to offset bracket **503** is another rotatable offset bracket **504** which supports magnet **501** and pivots around a horizontal axis **515** to any desired angular position. The pivoting of rotatable offset bracket **504** is provided by another positioning drive apparatus containing a motor (not shown), which is able to rotate offset bracket **504** around horizontal axis **515** to any desired angular position.

[0050] FIG. 5B illustrates a support and positioning apparatus for a stage **506** upon which is placed a specimen under investigation (SUI) **507**. A rotatable offset bracket **508** supports stage **506**. Offset bracket **508** is attached to and supported by a plinth **512**, which is rotated by a positioning drive apparatus **510** containing a motor, which is able to rotate offset bracket **508** to any desired angle around vertical axis **505**. This is the same vertical axis **505** around which offset bracket **503** is rotated. That is, during operation, the apparatus of FIG. 5A is precisely aligned with the apparatus of FIG. 5B, such that offset brackets **503** and **508** both rotate simultaneously around vertical axis **505**. A freely-rotating connector **509** maintains a stationary angular orientation of stage **506** as offset bracket **508** rotates. The apparatus of FIG. 5B is supported and stabilized by a lower structural member **511**.

[0051] According to various embodiments of the present invention, offset brackets **503** and **508** provide support that is offset from vertical axis **505**, and offset bracket **504** provides support that is offset from horizontal axis **515**. This enables magnet **501** to be positioned directly in-line along both vertical axis **505** and horizontal axis **515**, without interference from any supporting members that would block magnet **501** from being positioned as desired. In this manner, magnet **501** covers the full 4π steradian solid angle surrounding the specimen. According to these embodiments, the 4π steradian solid angle coverage is readily achieved by rotating offset bracket **508** so that it is always oriented 180° opposite to the rotated angular position of offset bracket **503**. Meeting this orientation constraint guarantees that offset bracket **504** (to which magnet **501** is directly affixed) can be rotated to any angle around horizontal axis **515** without having magnet **501** blocked by offset bracket **508**. In certain embodiments of the invention, offset bracket **508** is continuously rotated synchronously with respect to offset bracket **503** so that the above orientation constraint is always met; in other embodiments, however, offset bracket **508** is rotated only when necessary to avoid blocking magnet **501** by offset bracket **508**.

[0052] The combination of magnet **501** with the above apparatus constitutes a system for creating and manipulating a magnetic field to propel a magnetic device in a specimen. The following discussion and drawings illustrate how such a combination can be constructed and used.

[0053] FIG. 6A through FIG. 6G illustrate how magnet **501** can be positioned to six polar positions—two on each of the three coordinate axes (i.e., $\pm x$, $\pm y$, $\pm z$). Note that there are multiple configurations that position magnet **501** in the same location. For example, FIG. 6C and FIG. 6F both position magnet **501** in the same location relative to the specimen, but with different but equivalent configurations. These polar positions are special cases, but it can readily be seen that this apparatus is capable of moving magnet **501** into any position relative to stage **506**, over a complete solid angle of 4π steradians. That is, in spherical coordinates r , θ , and φ ,

apparatus according to these embodiments of the invention can position magnet **501** for any angular values of θ and φ . According to certain embodiments, r is constant—and this condition is illustrated in FIG. 6A through FIG. 6G. In further embodiments, however, r can be varied somewhat by changing one or more of the x , y , z coordinates of stage **506**, and in related embodiments this is accomplished by including x - y - z control into the apparatus, non-limiting examples of which include introducing x - y - z control into the positioning of stage **506** and/or the positioning of plinth **512**.

[0054] FIG. 6A illustrates magnet **501** with the support mounting and orienting apparatus of FIG. 5A in conjunction with SUI stage **506** and support and positioning apparatus of FIG. 5B, with conical magnet **501** oriented behind the SUI, according to an embodiment of the invention.

[0055] FIG. 6B illustrates magnet **501** with the support mounting and orienting apparatus of FIG. 5A in conjunction with SUI stage **506** and support and positioning apparatus of FIG. 5B, with conical magnet **501** oriented below the SUI, according to an embodiment of the invention.

[0056] FIG. 6C illustrates magnet **501** with the support mounting and orienting apparatus of FIG. 5A in conjunction with SUI stage **506** and support and positioning apparatus of FIG. 5B, with conical magnet **501** oriented in front of the SUI, according to an embodiment of the invention. Compare with FIG. 6F, as described below, in light of the remarks above concerning multiple configurations for achieving the same orientation of magnet **501**.

[0057] FIG. 6D illustrates magnet **501** with the support mounting and orienting apparatus of FIG. 5A in conjunction with SUI stage **506** and support and positioning apparatus of FIG. 5B, with conical magnet **501** oriented above the SUI, according to an embodiment of the invention.

[0058] FIG. 6E illustrates magnet **501** with the support mounting and orienting apparatus of FIG. 5A in conjunction with SUI stage **506** and support and positioning apparatus of FIG. 5B, with conical magnet **501** oriented to the left of the SUI, according to an embodiment of the invention.

[0059] FIG. 6F illustrates magnet **501** with the support mounting and orienting apparatus of FIG. 5A in conjunction with SUI stage **506** and support and positioning apparatus of FIG. 5B, with conical magnet **501** oriented in front of the SUI, according to an embodiment of the invention. Compare with FIG. 6C, as described above, in light of the remarks above concerning multiple configurations for achieving the same orientation of magnet **501**.

[0060] FIG. 6G illustrates magnet **501** with the support mounting and orienting apparatus of FIG. 5A in conjunction with SUI stage **506** and support and positioning apparatus of FIG. 5B, with conical magnet **501** oriented to the right of the SUI, according to an embodiment of the invention.

What is claimed is:

1. A system for creating and controlling a magnetic field to manipulate a device with a magnetic component in a specimen, the system comprising:

a cylindrical or similar organization of rod or rod like magnets enclosing a hollow space for the specimen; wherein the plurality of magnets form a Halbach array which includes:

a first array of magnets; and
a second array of magnets; and

and a motor drive operative to:

rotate all the magnets of the first array; and
rotate all the magnets of the second array.

2. The system of claim 1, wherein each magnet has a diametral magnetization.

3. The system of claim 1, wherein the first array of magnets and the second array of magnets are interleaved in an alternating fashion such that magnets from the first array always have magnets from the second array as their nearest neighbors.

4. The system of claim 1, wherein the rotation of the magnets of the first array is independent of the rotation of the magnets of the second array.

5. The system of claim 1, wherein the manipulation of the device with the magnetic component is propulsion of the device within the specimen.

6. The system of claim 1, wherein the manipulation of the device with the magnetic component is expulsion of a payload from the device into the specimen.

7. A system for creating and controlling a magnetic field to manipulate a device with a magnetic component in a specimen under investigation (SUI), the system comprising:

- a magnet for creating the magnetic field;
- a stage for holding the specimen;
- support and orienting apparatus for the magnet, to which the magnet is attached;
- support and orienting apparatus for the stage, to which the stage is attached; and
- at least one positioning drive apparatus containing a motor;

wherein the system is operative to orient the magnet over a solid angle of 4π steradians with respect to the stage.

8. The system of claim 7, wherein the support and orienting apparatus for the magnet includes at least a first rotatable offset bracket.

9. The system of claim 8, wherein the support and orienting apparatus for the stage includes at least a second rotatable offset bracket.

10. The system of claim 9, wherein the second rotatable offset bracket is rotated according to a position of the first rotatable offset bracket, so as to allow the first rotatable offset bracket to rotate to any angular position without having the magnet blocked by the second rotatable offset bracket.

11. The system of claim 7, wherein the SUI may be inserted inside the magnet and the magnet may be rotated 4π steradians with respect to the SUI is inside the magnet.

12. The system of claim 7, further comprising a control system that integrates all components and allows for both an operational and a diagnostics interface.

13. The system of claim 7, wherein the magnet is a conical or related shape magnet (e.g., pyramid, trapezoid).

14. The system of claim 7, wherein the manipulation of the device with the magnetic component is propulsion of the device within the specimen.

15. The system of claim 7, wherein the manipulation of the device with the magnetic component is expulsion of a payload from the device into the specimen.

* * * * *