


Technical Data :

One-Hole Lugs - Heavy Duty

For Copper Conductor, Conductor Range 25 - 630 Sq mm

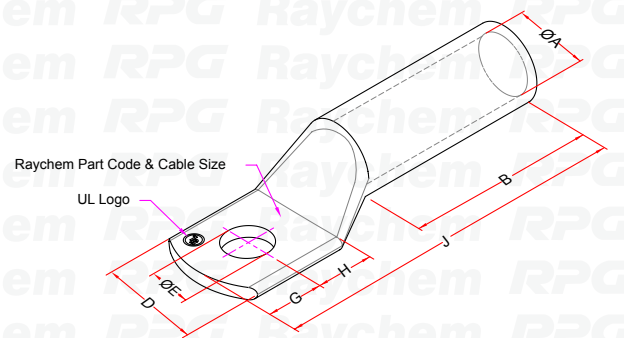

Characteristics

- HV Lugs are specially designed to the standard high voltage applications upto 33 KV.
- Annealed material optimizes material and crimping properties
- Flat contact surface and precise stud holes as per the Metric standard

Material

- High Conductivity ETP-Copper

Finish

- Electro Tin Plated

Catalogue Code	Nominal Cross Section (AWG / Sq mm)		Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total Length
	AWG	Sq mm	ØE	ØA	D	G	H	B	J
RLHV 25-6	25	M6	6.5	6.8	16.0	10.0	12.0	37.0	68.5
RLHV 25-8		M8	8.4	6.8	16.0	10.0	12.0	37.0	68.5
RLHV 25-10		M10	10.5	6.8	16.0	10.0	12.0	37.0	68.5
RLHV 25-12		M12	13.0	6.8	18.0	10.0	12.0	37.0	68.5
RLHV 35-6	35	M6	6.5	8.2	19.5	14.0	16.0	37.0	79.5
RLHV 35-8		M8	8.4	8.2	19.5	14.0	16.0	37.0	79.5
RLHV 35-10		M10	10.5	8.2	19.5	14.0	16.0	37.0	79.5
RLHV 35-12		M12	13.0	8.2	19.5	14.0	16.0	37.0	79.5
RLHV 35-14		M14	14.5	8.2	19.5	14.0	16.0	37.0	79.5
RLHV 35-16		M16	17.0	8.2	19.5	14.0	16.0	37.0	79.5
RLHV 50-6	50	M6	6.5	9.5	20.0	15.0	16.0	39.5	79.5
RLHV 50-8		M8	8.4	9.5	20.0	15.0	16.0	39.5	79.5
RLHV 50-10		M10	10.5	9.5	20.0	15.0	16.0	39.5	79.5
RLHV 50-12		M12	13.0	9.5	20.0	15.0	16.0	39.5	79.5
RLHV 50-14		M14	14.5	9.5	20.0	15.0	16.0	39.5	79.5
RLHV 50-16		M16	17.0	9.5	20.0	15.0	16.0	39.5	79.5
RLHV 70-6	70	M6	6.5	11.0	23.0	14.0	16.0	42.0	81.5
RLHV 70-8		M8	8.4	11.0	23.0	14.0	16.0	42.0	81.5
RLHV 70-10		M10	10.5	11.0	23.0	14.0	16.0	42.0	81.5
RLHV 70-12		M12	13.0	11.0	23.0	14.0	16.0	42.0	81.5
RLHV 70-14		M14	14.5	11.0	23.0	14.0	16.0	42.0	81.5
RLHV 70-16		M16	17.0	11.0	23.0	14.0	16.0	42.0	81.5

Continued...

Technical Data :

RLHV One-Hole Lugs - Heavy Duty ...Continued

Catalogue Code	Nominal Cross Section (AWG / Sq mm)		Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total Length
	AWG	Sq mm	ØE	ØA	D	G	H	B	J
RLHV 95-8	95	M8	8.4	13.5	27.0	14.0	16.0	46.0	90.0
RLHV 95-10		M10	10.5	13.5	27.0	14.0	16.0	46.0	90.0
RLHV 95-12		M12	13.0	13.5	27.0	14.0	16.0	46.0	90.0
RLHV 95-14		M14	14.5	13.5	27.0	14.0	16.0	46.0	90.0
RLHV 95-16		M16	17.0	13.5	27.0	14.0	16.0	46.0	90.0
RLHV 95-18		M18	19.0	13.5	27.0	14.0	16.0	46.0	90.0
RLHV 95-20		M20	21.0	13.5	27.0	14.0	16.0	46.0	90.0
RLHV 95-BL		-	-	13.5	27.0	14.0	16.0	46.0	90.0
RLHV 120-8	120	M8	8.4	15.0	29.0	16.0	16.0	52.0	98.0
RLHV 120-10		M10	10.5	15.0	29.0	16.0	16.0	52.0	98.0
RLHV 120-12		M12	13.0	15.0	29.0	16.0	16.0	52.0	98.0
RLHV 120-14		M14	14.5	15.0	29.0	16.0	16.0	52.0	98.0
RLHV 120-16		M16	17.0	15.0	29.0	16.0	16.0	52.0	98.0
RLHV 120-18		M18	19.0	15.0	29.0	16.0	16.0	52.0	98.0
RLHV 120-20		M20	21.0	15.0	29.0	16.0	16.0	52.0	98.0
RLHV 120-BL		-	-	15.0	29.0	16.0	16.0	52.0	98.0
RLHV 150-8	150	M8	8.4	16.5	32.0	19.0	16.0	56.5	105.0
RLHV 150-10		M10	10.5	16.5	32.0	19.0	16.0	56.5	105.0
RLHV 150-12		M12	13.0	16.5	32.0	19.0	16.0	56.5	105.0
RLHV 150-14		M14	14.5	16.5	32.0	19.0	16.0	56.5	105.0
RLHV 150-16		M16	17.0	16.5	32.0	19.0	16.0	56.5	105.0
RLHV 150-18		M18	19.0	16.5	32.0	19.0	16.0	56.5	105.0
RLHV 150-20		M20	21.0	16.5	32.0	19.0	16.0	56.5	105.0
RLHV 150-BL		-	-	16.5	32.0	19.0	16.0	56.5	105.0
RLHV 185-8	185	M8	8.4	18.5	32.7	17.0	19.0	65.0	113.5
RLHV 185-10		M10	10.5	18.5	32.7	17.0	19.0	65.0	113.5
RLHV 185-12		M12	13.0	18.5	32.7	17.0	19.0	65.0	113.5
RLHV 185-14		M14	14.5	18.5	32.7	17.0	19.0	65.0	113.5
RLHV 185-16		M16	17.0	18.5	32.7	17.0	19.0	65.0	113.5
RLHV 185-18		M18	19.0	18.5	32.7	17.0	19.0	65.0	113.5
RLHV 185-20		M20	21.0	18.5	32.7	17.0	19.0	65.0	113.5
RLHV 185-BL		-	-	18.5	32.7	-	-	65.0	113.5
RLHV 240-8	240	M8	8.4	21.0	38.0	20.0	20.0	65.0	119.5
RLHV 240-10		M10	10.5	21.0	38.0	20.0	20.0	65.0	119.5
RLHV 240-12		M12	13.0	21.0	38.0	20.0	20.0	65.0	119.5
RLHV 240-14		M14	14.5	21.0	38.0	20.0	20.0	65.0	119.5
RLHV 240-16		M16	17.0	21.0	38.0	20.0	20.0	65.0	119.5
RLHV 240-18		M18	19.0	21.0	38.0	20.0	20.0	65.0	119.5
RLHV 240-20		M20	21.0	21.0	38.0	20.0	20.0	65.0	119.5
RLHV 240-BL		-	-	21.0	38.0	-	-	65.0	119.5

Continued...

*Non-UL

Technical Data :

RLHV One-Hole Lugs - Heavy Duty ...Continued

Catalogue Code	Nominal Cross Section (AWG / Sq mm)		Dimensions (mm)						
			Stud Hole	Barrel ID	Palm Width	Stud Centre Distance		Barrel Length	Total Length
	AWG	Sq mm	ØE	ØA	D	G	H	B	J
RLHV 300-8	300	M8	8.4	23.5	45.0	22.0	22.0	79.5	138.5
RLHV 300-10		M10	10.5	23.5	45.0	22.0	22.0	79.5	138.5
RLHV 300-12		M12	13.0	23.5	45.0	22.0	22.0	79.5	138.5
RLHV 300-14		M14	14.5	23.5	45.0	22.0	22.0	79.5	138.5
RLHV 300-16		M16	17.0	23.5	45.0	22.0	22.0	79.5	138.5
RLHV 300-18		M18	19.0	23.5	45.0	22.0	22.0	79.5	138.5
RLHV 300-20		M20	21.0	23.5	45.0	22.0	22.0	79.5	138.5
RLHV 300-BL		-	-	23.5	45.0	22.0	22.0	79.5	138.5
RLHV 400-10	400	M10	10.5	27.0	53.0	26.0	26.0	81.0	154.0
RLHV 400-12		M12	13.0	27.0	53.0	26.0	26.0	81.0	154.0
RLHV 400-14		M14	14.5	27.0	53.0	26.0	26.0	81.0	154.0
RLHV 400-16		M16	17.0	27.0	53.0	26.0	26.0	81.0	154.0
RLHV 400-18		M18	19.0	27.0	53.0	26.0	26.0	81.0	154.0
RLHV 400-20		M20	21.0	27.0	53.0	26.0	26.0	81.0	154.0
RLHV 400-BL		-	-	27.0	53.0	26.0	26.0	81.0	154.0
RLHV 500-10	500	M10	10.5	30.3	57.0	28.0	28.0	85.5	166.0
RLHV 500-12		M12	13.0	30.3	57.0	28.0	28.0	85.5	166.0
RLHV 500-14		M14	14.5	30.3	57.0	28.0	28.0	85.5	166.0
RLHV 500-16		M16	17.0	30.3	57.0	28.0	28.0	85.5	166.0
RLHV 500-18		M18	19.0	30.3	57.0	28.0	28.0	85.5	166.0
RLHV 500-20		M20	21.0	30.3	57.0	28.0	28.0	85.5	166.0
RLHV 500-BL		-	-	30.3	57.0	28.0	28.0	85.5	166.0
RLHV 630-10	630	M10	10.5	33.4	61.0	33.0	33.0	95.5	188.0
RLHV 630-12		M12	13.0	33.4	61.0	33.0	33.0	95.5	188.0
RLHV 630-14		M14	14.5	33.4	61.0	33.0	33.0	95.5	188.0
RLHV 630-16		M16	17.0	33.4	61.0	33.0	33.0	95.5	188.0
RLHV 630-18		M18	19.0	33.4	61.0	33.0	33.0	95.5	188.0
RLHV 630-20		M20	21.0	33.4	61.0	33.0	33.0	95.5	188.0
RLHV 630-BL		-	-	33.4	61.0	33.0	33.0	95.5	188.0