


Idea #1:

Remove section of semi-circular pull-tab to make it clear which side to pull from and reduce probability of it breaking. Add clear signals of which direction to pull in and suggest how to apply force.

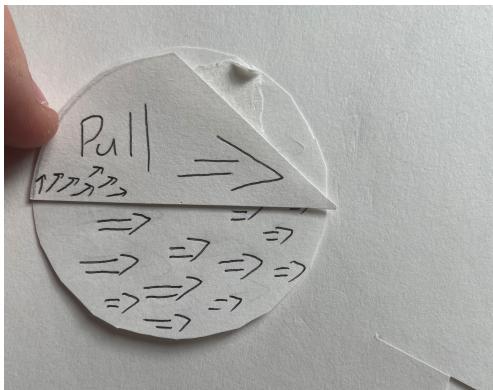

Idea #2 (Doesn't use pull in same manner):

Embed some sort of string or line into adhesive under seal. Line attached to pull tab on top with clear signals to pull from there and proceed counter-clockwise. String affords easier and enjoyable opening of seals as you reduce the risk of breaking the seal and provide some satisfying feedback to opening it in the right way.

