

Matrix + three-factor strengthening model (common-parameter calibration)

σ_0 matrix


σ_{SS} solid solution

σ_{HP} grain boundary


σ_{dis} dislocation

$\sigma_{experimental}$


(a) 7.00 mm (0.00%)

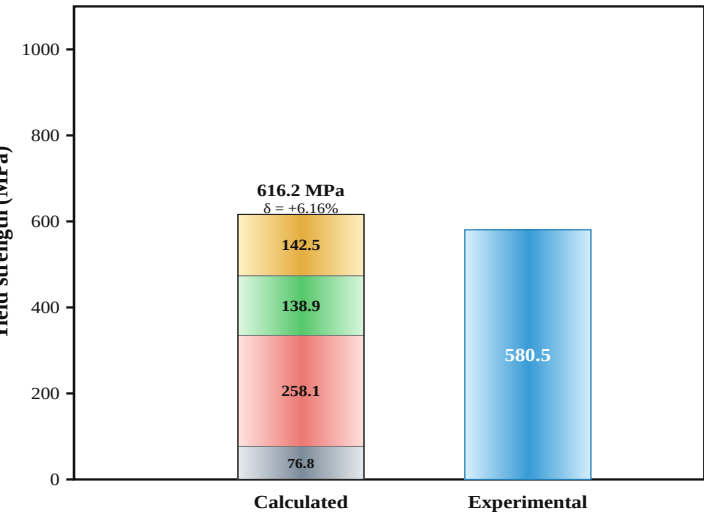


(b) 6.48 mm (14.31%)

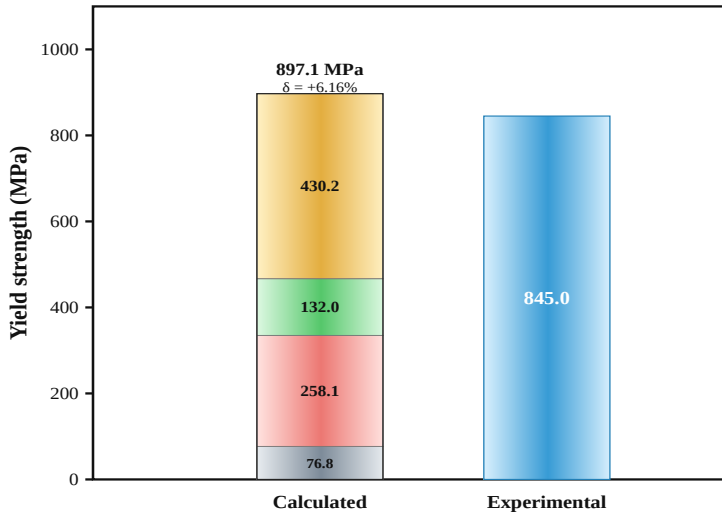


(c) 6.02 mm (26.04%)

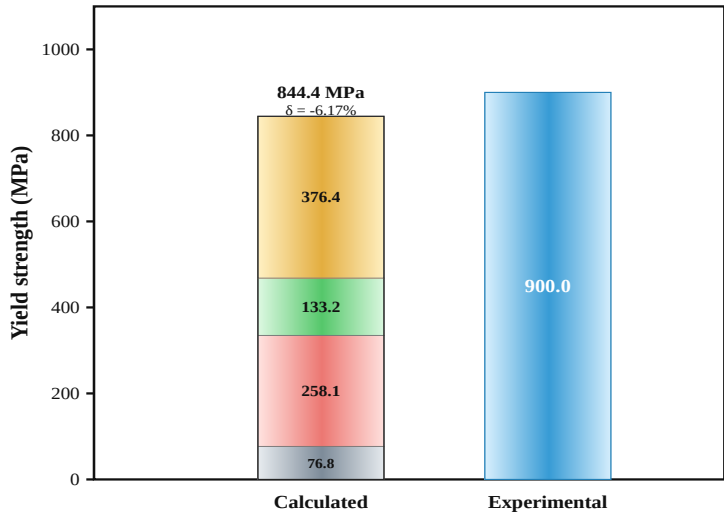

(d) 5.60 mm (36.00%)

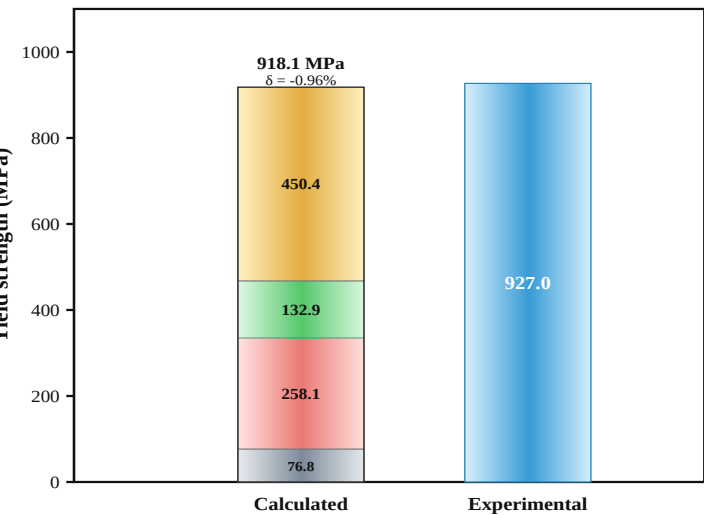

(e) 5.25 mm (43.75%)

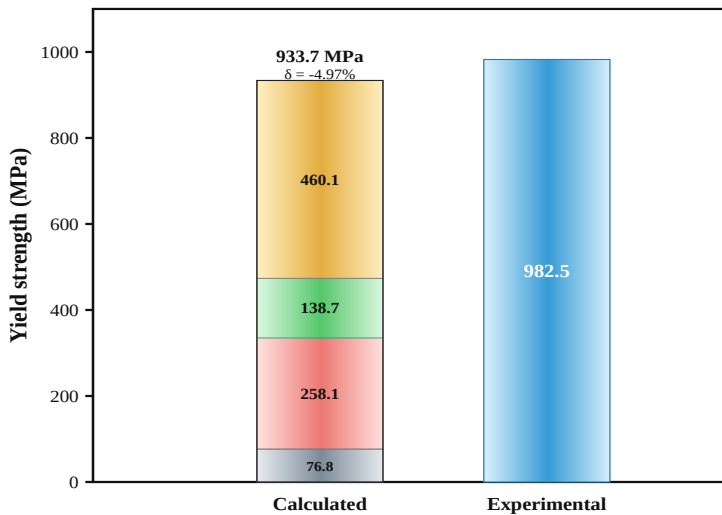

(f) 5.00 mm (48.98%)

