




MICRON ENGINEERING CORP

2023 CATALOG

COUPLER SERIES
AIR CONDITIONING / AUTOMOTIVE /
REFRIGERATION

INDEX

NAME / MODEL	PRODUCT	PAGE NO.
INTRODUCTION		3
HISTORY		4-5
QUALITY POLICY STATEMENT		6
AWARD AND ACHIVEMENT		7
SAFETY GUIDE		8-9
DS SERIES		10-11
TCL SERIES		12-14
TQC SERIES		15-16
TGPL SERIES		17-19
TCC SERIES		20-24
IPC SERIES		25-26
ODU SERIES		27-29
ODU - AUT SERIES		30-32
MAS SERIES		33-34
HCG SERIES		35-36
MCG SERIES		37-38
MGC SERIES		39-40
PIP - AUT - SERIES		41-44
CAR - AC - SERIES		45

INTRODUCTION

We take pleasure in introducing ourselves as manufacturers of Self-Sealing-Mono and Multi coupling systems, Pneumatic, Hydraulic and other wide range of Industrial products.

Our products are widely used in gas / fluid line connection for the Automotive and Refrigerant Industry. We manufacture a wide range of high precision metallic components for Steel, Dairy, Food and Beverage, Pharmaceuticals and Biotechnology, Defense, Shipping, Electrical, Power & Energy Industries. Our range also includes different types of rubbers and polymers for all the above Industry.

Our Manufacturing unit is well equipped with a development division to cater the customer's requirements made to order.

Micron Engineering Corporation is committed to publicizing this quality culture with employees, suppliers, clients and the community supported by the QC 100 total quality management model.

Please find enclosed our brochures showing technical and pictorial catalogues, where you will find variety of our standard couplings and allied elements for low, medium and high-pressure applications.

For further Information regarding our products and future models, which will be forthcoming, or for any information in general, feel free to contact us.

OBJECTIVE

MICRON'S reputation has constantly improved since its inception and is fundamentally based on service excellence. The product range in respect of import substitution has increased and a large volume of products is now locally manufactured thus avoiding the problems of costs associated with freight, customs duties and import surcharges.

***Your Reliable Partner for
High Quality Fluid Couplers***



HISTORY

MICRON ENGINEERING CORPORATION was founded in 1989 by an Indian entrepreneurial action of two brothers who intended to be traders of small precision metal components in small & medium series to national manufacturing companies. In the nineties, the experience of "co-design" implemented with cooperation of customers in different industrial application (Refrigeration, Automotive, Air- conditioners Food & Pharmaceuticals, Groups of Defense & Navy, and few Government enterprises), allowed the company staff to strengthen its technical and productive experience. In 2000 the Company felt the need to follow the path of design and sale of a product on its own, especially dedicated to the mechanical engineering market. Those were the years of introducing the modern methods of testing and providing effective solutions to the clients. In the early years of **20th century**, following the same direction, the company continued to develop innovative products, meeting market requirements for technical and qualitative performances ever higher.

These were the years of cost effective trade and maximum output at the user's end. Between the years of **2004 & 2005**, the orientation towards providing an international market is then realized; the company got the confirmation of its own products as a point of ISO international standard reference. The certification and implementation of ISO 9001 still accompanies and supports the whole activity towards the customer service.

The beginning of the **2006** sees the implementation of several targets including the expansion of space in its existing setup devoted to the demands and approval of clients and exploring the international opportunities. This period saw an opening of the company from a family structure to corporate governance.

Year **2007** saw the approvals of global clients and international network taking the exports to South East Asia and the Middle East. The positive results towards this co-operation of clients motivated the company to participate in its first ever-international trade fair.



Year 2008 was the year where the company got credited towards an international recognition with the “**INTERNATIONAL QUALITY CROWN AWARD (London)**” from **Business Initiative Directors**, followed by “**NATIONAL AWARD FOR ENTREPRENEURSHIP**” from **The Government of India**”.

The achievements in form of awards have given the company an edge to prove its metal and take its product to new heights in terms of quality, service and innovation.

The company has a strong manufacturing setup and has continued its trading network to ensure its clients one stop shop for their requirements.

Thanks to an organizational staff and an important network of suppliers/partners, we design, manufacture and export the production in different industry applications in few parts of the globe.

Our constant dedication to innovation, development and continues improvement is increased through the staff efforts and dedication to teamwork.

The devoted care to measure the performances and the added value of our staff gives quality to their own activity as well as confidence in their own skill.

The company goal is a long-term continuity being well aware that the “**Challenges**” and “**Improvements**” to the highest levels of “**Customer Satisfaction**”.

QUALITY POLICY STATEMENT

MICRON is an ISO CERTIFIED COMPANY and the quality policy follows as under:

To design and develop and manufacture the products of desired quality.

- Meeting our delivery deadlines.
- Ever improving customer satisfaction.
- Strive for continual improvement.

COMPANY STRUCTURE & SERVICE POLICY

The Company Head Office is located in Hyderabad (India) and has a dealership network on zonal basis. The individual dealers are autonomous in operation and are geared to provide the specialist services required for the specific area. Each dealer is responsible for its own inventory and is capable of providing design, supply or installation activities to their individual customers. This practice emphasis's the service aspect of Micron's operations.

Major projects are undertaken with the objective of harnessing and utilizing the total resources of the company. In this manner, we are able to offer the best services available in the country.

QUALITY ASSURANCE

Developed in conjunction with clients and various project organizations and unit inspection teams, who were appointed as Quality Assurance Specialists in a number of major projects and are familiar with exacting the standards

PRODUCT DEVELOPMENT


New product design and development is a regular process and performed in our own manufacturing set up for better assurance towards quality and customer requirements. Custom designs are available for better co-ordination with our clients.

TESTING FACILITY

Micron's testing facility is in house equipped with latest technology. As part of quality management system certified under ISO 9001:2000 Micron assures top quality in testing its products

AWARDS AND ACHIEVEMENTS

1. International Quality Crown Award - Golden Category at London 2007.
2. International Star Award for Quality in Gold Category at Geneva 2007.
3. International Arch of Europe Award – Platinum Category, Germany 2008.
(To be received on February 4, 2008 in Frankfurt).
4. National Award (Special Recognition Award) - from Ministry of Micro, Small & Medium Enterprises for Outstanding Entrepreneurship Efforts honoured at New Delhi on 30th August 2008.

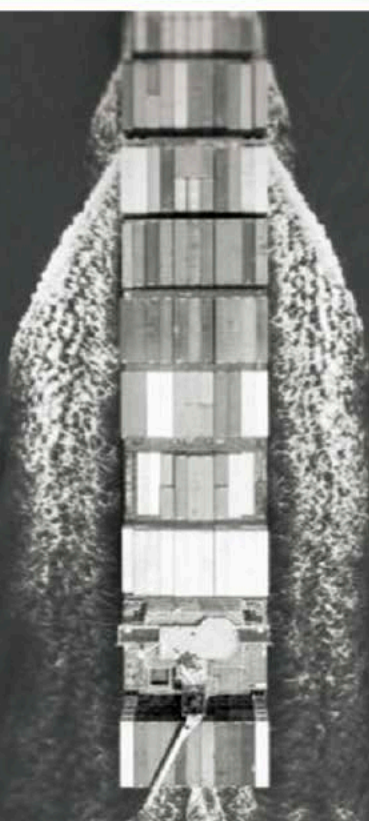

SAFETY GUIDE FOR SELECTION OF QUICK ACTING COUPLER AND RELATED ACCESSORIES.

During the selection of Quick acting Couplers , fluid dynamics safety has to be considered, fluid dynamics safety typically involves calculating adequately various properties of the fluid, such as density, velocity, pressure and temperature and the working environment.

CAUTION:

Any failure or improper use or improper selection of quick acting coupler and/or related components/accessories can cause death, personal injury and property damage. Possible Hazards include, but are not limited:

Products and components mentioned here, including without limitation, all component features, specifications, designs, pricing and availability are subject to change at any time at the sole discretion of Micron Engineering Corporation and its subsidiaries at any time without notice.

FLUID TYPE:

While selecting a coupler always check the compatibility of body and the seal material in accordance to the fluid media being used (Air, Water, Gas, Oil etc). We provide different types of body material and seals to suite different kinds of Fluids.

FLUID PRESSURE:

While selecting a coupler always check the compatibility of body and the seal material in accordance to the fluid media being used (Air, Water, Gas, Oil etc). We provide different types of body material and seals to suite different kinds of Fluids.

TEMPERATURE:

While selecting a coupler always check the compatibility of body and the seal material in accordance to the fluid media being used (Air, Water, Gas, Oil etc). We provide different types of body material and seals to suite different kinds of Fluids.

SIZE:

While selecting a coupler always check the compatibility of body and the seal material in accordance to the fluid media being used (Air, Water, Gas, Oil etc). We provide different types of body material and seals to suite different kinds of Fluids.

ENVIRONMENT:

Care must be taken to ensure that quick couplers are either compatible with or protected from the environment to which they are exposed. Environmental conditions including but not limited to ultraviolet radiation, ozone, moisture, water, salt water, chemicals, and air pollutants can cause degradation and premature failure.

LOCKING MEANS:

Ball locking quick acting coupler can unintentionally disconnect if they are dragged over obstructions on the end of a hose or if the sleeve is bumped or moved enough to cause disconnect. Sleeves designed with flanges to provide better gripping for oily or gloved hands are especially susceptible to accidental disconnect and should not be used where these conditions exist. Sleeve lock or union (threaded) sleeve designs should be considered where there is a potential for accidental uncoupling.

RADIANT HEATING:

Quick action couplers can get heated to devastation effect or loss of sealing ability without contact by such nearby items as hot manifolds or molten metal. This can occur despite the presence of cool air around the quick action couplers.

MECHANICAL LOADS:

Mechanical loads such as excessive tensile or side loads, vibration or any such external forces can considerably reduce quick acting couplers life, which cause failure. Unusual applications may require special testing prior to quick acting couplers selection.

VACCUM:

Mechanical loads such as excessive tensile or side loads, vibration or any such external forces can considerably reduce quick acting couplers life, which cause failure. Unusual applications may require special testing prior to quick acting couplers selection.

WELDING & BRAZING:


Heating of plated parts, including quick acting couplers and port adapters, above 450°F (232°C) such as during welding, brazing, or soldering may emit deadly gases and may cause coupling seal damage.





PRECAUTION WHEN USING A QUICK ACTION COUPLER.

- Do not use couplers in an environment where there are chances of dust, debris and any foreign particles may cause damage to the seal of the coupler, which might result in the leakage.
- Couplers should always be capped with dust caps when not in use for a longer and better performance.
- Make sure accumulators and filters are used to avoid any kind of foreign particles entering into the fluid flow resulting in the malfunction of the Couplers.
- Do not use tools like impact devices or hammers that cause vibrations and results in a fatal situation. Do not tap or hit the valve to exhaust the residual pressure, this might result in the malfunction of valve open / close operation.
- Do not connect or disconnect a coupler when pressure is applied. Do not use any external tools when pressure is applied, this may cause damage to the coupler.
- Do not use a quick acting coupler to a rotating device like rotary or swivel joints.
- Make sure to dry clean the coupler after using it in wet conditions to avoid malfunction.

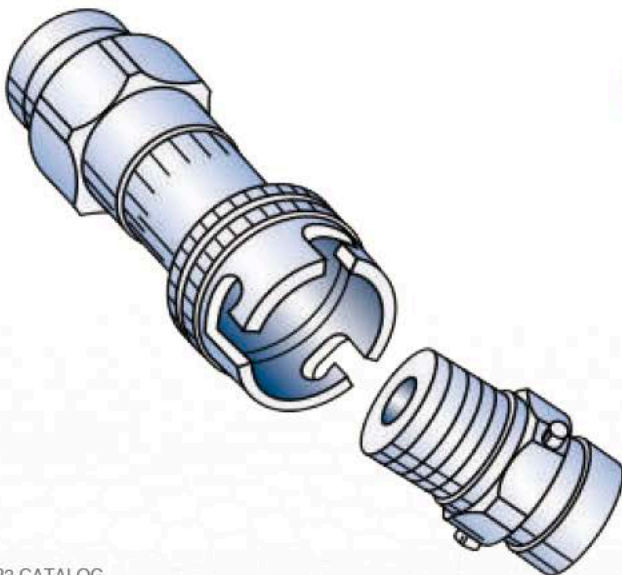

NOTE

For any further queries or any assistance in regard to the selection of coupler, please contact Micron Engineering corporation fill the enquiry form on our website and we will be at your assistance.

www.micronengg.com

DS Series

QUICK ACTION COUPLER



FEAUTURES

- This series is mainly used for refrigerant gas charging & vacuum application in production lines of air conditioners & refrigerators.
- Both the socket & plug come equipped with automatic shut off valves which can withstand vacuum up to 1.3×10^{-1} pa when separated.
- Connected to MCG series, HCG series, MGC series, & MAS series
- Comes with variety of packing material suitable for different fluids for Eg: R134a, R-22, R-407, R-410 etc.
- It comes equipped with Double O-rings which effects in high air Tightness & Vacuum resistance when connected.


APPLICATION

- 1) DS series is mainly used for refrigerant gas charging and vacuum application.
- 2) It works on a simple push & pull principle.
- 3) When the plug is pushed in the socket, it is securely held by the self-locking arrangement resulting in positive & leak proof connection.
- 4) This action simultaneously opens the valve & the flow of fluid starts.
- 5) To disconnect the sleeve of the socket is puled back, when separated the plug & the valves shut off automatically.


SPECIFICATION

Material of Construction	Stainless Steel & Brass			
Working Pressure	Refer Table			
Pressure Assistance	Refer Table			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Refrigerant, Refrigerant oil, Air, Helium	Neoprene	CR	-15°C ~ +80°C
	Air, Helium, Vacuum	Viton	FKM	-20°C ~ +180°C
	For R134a R410a Gases	HNBR	HNBR	-20°C ~ +120°C

PLUG



SOCKET



MODEL	SIZE	DIMENSIONS						Working Pressure MPA (Kgf/cm)		Pressure Resistance MPA (Kgf/cm)	
		L (mm)	H (mm)	C (mm)	A (mm)	T (mm)		*BR	*SS	*BR	*SS
1 *MSV	1 *MBV	R 1/8	29	Hex-14	19	11	R 1/8	4.90	7.3	7.3	9.8
2 MSV	2 MBV	R1/4	36	Hex-17	22	13	R 1/4	(50)	(75)	(75)	(100)
3 MSV	3 MBV	R3/8	40	Hex-22	25.4	11	R 3/8				
4 MSV	4 MBV	R1/2	44	Hex-29	28	15	R 1/2				
5 MSV	5 MBV	R3/4	52	Hex-35	36	17	R 3/4	2.9	4.4	4.4	6.3
6 MSV	6 MBV	R 1	62	Hex-41	40.3	21	R 1	(30)	(45)	(45)	(65)

*MSV- SS PLUG, *MBV-BRASS PLUG, *BR -BRASS,
*SS - STAINLESS STEEL

MODEL	SIZE	DIMENSIONS						Working Pressure MPA (Kgf/cm)		Pressure Resistance MPA (Kgf/cm)	
		L (mm)	H (mm)	C (mm)	A (mm)	T (mm)		*BR	*SS	*BR	*SS
1 *MSS	1 *MBS	R 1/8	48	*FW-14 X Ø18	24	11	R 1/8	4.90	7.3	7.3	9.8
2 MSS	2 MBS	R1/4	58	*FW-19 X Ø22	28.5	13	R 1/4	(50)	(75)	(75)	(100)
3 MSS	3 MBS	R3/8	65	*FW-21 X Ø25	35	11	R 3/8				
4 MSS	4 MBS	R1/2	72	*FW-29 X Ø35	44		R 1/2	2.9	4.4	4.4	6.3
5 MSS	5 MBS	R3/4	88	*FW-35 X Ø41	53	17	R 3/4	(30)	(45)	(45)	(65)
6 MSS	6 MBS	R 1	102	*FW-41 X Ø48	63	21	R 1				

*MSS- SS SOCKET, *MBS-BRASS SOCKET, *FW – FACE WIDTH
*BR -BRASS, *SS - STAINLESS STEEL

ORDERING INFORMATION

P-3MSV

P-3MSV

M

1

TYPE

2

**SIZE
MATERIAL**


3

**PACKING/
SEAL MATERIAL**

HNBR	HNBR
CR	Neoprene
FKM	Viton
NBR	Nitrile
S	SOCKET
P	PLUG
1	R 1/8
2	R 1/4
3	R 3/8
4	R 1/2
5	R 3/4
6	R 1

TCL Series

QUICK ACTION COUPLER

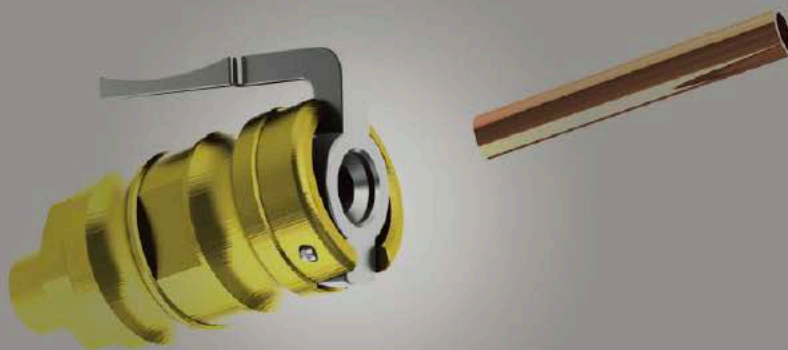

FEAUTES


- Clamps directly on the copper & aluminium straight tubes with just a thumb operation.
- Brazing can be avoided while using TCL Series.
- Helps in Reduction of cycle time which invariably reduces the production time & prevents operator fatigue.
- Excellent in water Dip testing for heat exchanger coils.
- Can be used for Filling work, Pressure Tests & Leak Test.
- Connection & Disconnection of pipe is Quick & easy.

APPLICATION

1) The TCL Series is a simple device which clamps the pipe by simply inserting the pipe & pushing the lever. This Series is mainly used for refrigerant compressor & heat exchanger manufactures in their production lines.


SPECIFICATION

Material of Construction	Brass & Stainless steel			
Working Pressure	Refer Table			
Pressure Assistance	Refer Table			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	For High Temperature	Viton	FKM	-15°C ~ +180°C
	For Refrigerant Gases	Neoprene	CR	-20°C ~ +80°C
	For R134a Gas	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen, Helium	Nitrile	NBR	-20°C ~ +80°C

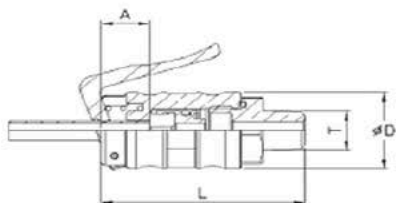

MODEL	Pipe O.D	L (mm)	D (mm)	Thread Size	Insertion length (A)	Working Pressure	Pressure Resistance
TCL-275	2.75	58.2	26.0	R 1/4, R 3/8	16.0	3.43 Mpa (35 Kg/cm ²)	3.92 Mpa (40 Kg/cm ²)
TCL-320	3.20	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-400	4.00	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-476	4.76	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-550	5.50	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-600	6.00	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-635	6.35	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-750	7.50	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-800	8.00	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-952	9.52	58.2	26.0	R 1/4, R 3/8	16.0		
TCL-1000	10.00	65.0	30.0	R 1/4, R 3/8, R 1/2	19.0	2.45 Mpa (25 Kg/cm ²)	3.43 Mpa (35 Kg/cm ²)
TCL-1100	11.10	65.0	30.0	R 1/4, R 3/8, R 1/2	19.0		
TCL-1200	12.00	65.0	30.0	R 1/4, R 3/8, R 1/2	19.0		
TCL-1270	12.70	69.0	34.0	R 1/4, R 3/8, R 1/2	24.0		
TCL-1330	13.30	69.0	34.0	R 1/4, R 3/8, R 1/2	24.0		
TCL-1430	14.30	65.0	30.0	R 1/4, R 3/8, R 1/2	24.0	1.96 Mpa (20 Kg/cm ²)	2.94 Mpa (30 Kg/cm ²)
TCL-1480	14.80	69.0	34.0	R 1/4, R 3/8, R 1/2	24.0		
TCL-1587	15.87	69.0	34.0	R 1/4, R 3/8, R 1/2	26.0		
TCL-1600	16.00	69.0	34.0	R 1/4, R 3/8, R 1/2	26.0		
TCL-1820	18.20	68.0	42.0	R 1/4, R 3/8, R 1/2	25.0		
TCL-1905	19.05	70.0	42.0	R 1/4, R 3/8, R 1/2	25.0		
TCL-2000	20.00	70.0	42.0	R 1/4, R 3/8, R 1/2	25.0		
TCL-2130	21.30	70.0	42.0	R 1/4, R 3/8, R 1/2	25.0		

MODEL	Pipe O.D	L (mm)	D (mm)	Thread Size	Insertion length (A)	Working Pressure	Pressure Resistance
TCL-2220	22.20	70.0	42.0	R 1/4, R 3/8, R 1/2	25.0	0.98 Mpa (10 Kg/ cm2)	1.96 Mpa (20 Kg/ cm2)
TCL-2540	25.40	85.0	50.0	R 1/4, R 3/8, R 1/2	35.0		
TCL-2860	28.60	95.0	58.0	R 1/4, R 3/8, R 1/2	43.0		
TCL-3000	30.00	95.0	58.0	R 1/4, R 3/8, R 1/2	43.0	0.48 Mpa (5 Kg/ cm2)	0.98 Mpa (10 Kg/ cm2)

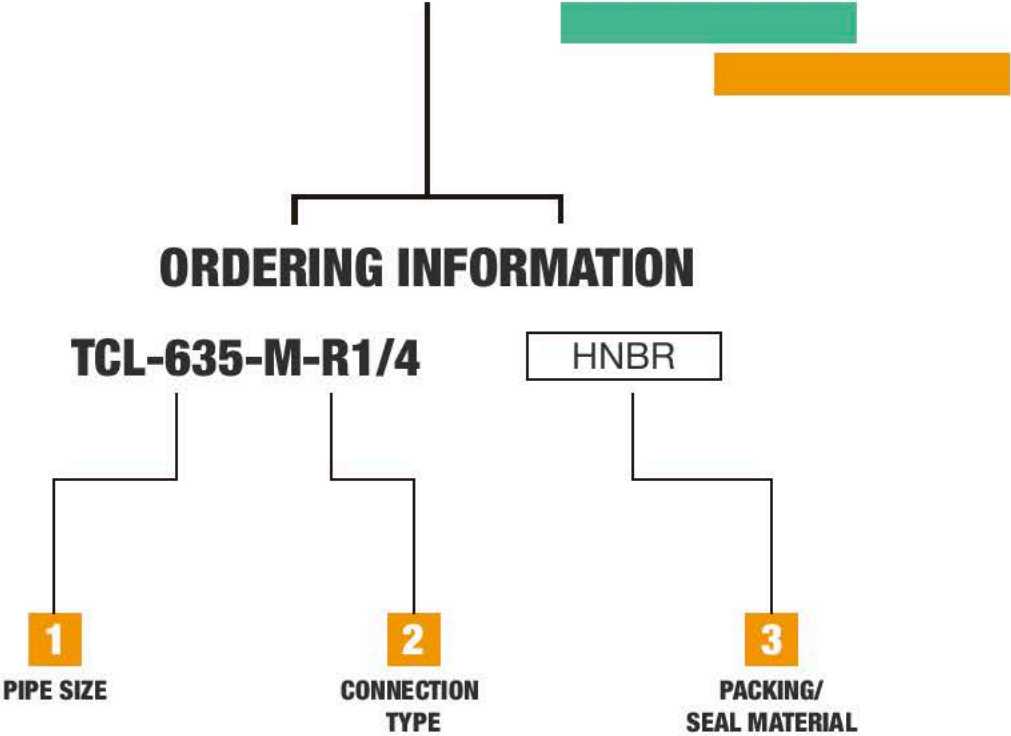

D	DUMMY
M-R1/4	R1/4
M-R3/8	R3/8
M-R1/2	R1/2
M-P 2MSV	WITH 2MSV PLUG
M-P 3MSV	WITH 3MSV PLUG
M-P 4MSV	WITH 4MSV PLUG

HNBR	HNBR
CR	VITON
FKM	NEOPRENE
NBR	NITRILE

TQC Series

QUICK ACTION COUPLER



FEAUTURES


- TQC series is designed for easy installation/clamping on straight copper tube.
- Flaring & welding of the copper tube is not required while using this series.
- Can be used for Gas charging, Leak testing & vacuum testing.
- The stainless-steel collet chuck enables a firm grip on the copper tube.
- It comes equipped with a double seal construction which ensures the pipe end & the outer diameter of the tube are sealed simultaneously for a leak free connection.
- It can withstand a vacuum of 1.3×10^{-1} pa.

APPLICATION

- 1) This series is used in the production lines of air conditioners refrigerators & compressor industry for leak testing, Gas charging & vacuum applications.
- 2) The pipe is inserted in the coupler & then the lever is pushed forward which results in firm sealing of copper tube & providing air tight sealing.

SPECIFICATION

Material of Construction	Stainless steel & Brass			
Working Pressure	Refer Table			
Pressure Assistance	Refer Table			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Refrigerant, Refrigerant oil, Air, Helium	Neoprene	CR	-20°C ~ +80°C
	Air, Helium, Vacuum	Viton	FKM	-15°C ~ +180°C
	For R134a R410a Gases	HNBR	HNBR	-20°C ~ +120°C

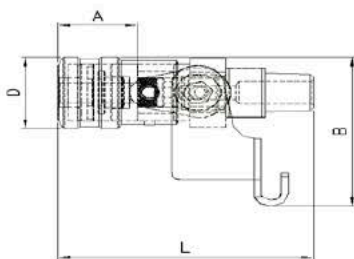

MODEL	Pipe O.D	L (mm)	D (mm)	B (mm)	Thread Size	Insertion length (A)	Working Pressure	Pressure Resistance
TQC-360	3.60	68.5	25.0	54.0	R 1/4, R 3/8	22.0	2.90 Mpa (30 Kgf/cm ²)	4.41 Mpa (45 Kgf/cm ²)
TQC -400	4.00	68.5	25.0	54.0	R 1/4, R 3/8	22.0		
TQC -476	4.76	68.5	25.0	54.0	R 1/4, R 3/8	22.0		
TQC -600	6.00	68.5	25.0	54.0	R 1/4, R 3/8	22.0		
TQC -635	6.35	68.5	25.0	54.0	R 1/4, R 3/8	22.0		
TQC -700	7.00	71.0	28.0	57.0	R 1/4, R 3/8	24.0		
TQC -800	8.00	71.0	28.0	57.0	R 1/4, R 3/8	24.0		
TQC -952	9.52	71.0	28.0	57.0	R 1/4, R 3/8	24.0		
TQC -1270	12.70	83.0	38.0	83.0	R 1/4, R 3/8, R1/2	32.0	2.45 Mpa (25 Kgf/cm ²)	3.43Mpa (35 Kgf/cm ²)
TQC -1587	15.87	83.0	28.0	83.0	R 1/4, R 3/8, R1/2	32.0	1.96 Mpa (20 Kgf/cm ²)	2.94 Mpa (30 Kgf/cm ²)
TQC-1905	19.05	103	42.0		R 1/4, R 3/8, R 1/2	32.0		

ORDERING INFORMATION

TQC-635-M-R1/4

HNBR

1

PIPE SIZE

2

**CONNECTION
SIZE**

3

**PACKING/
SEAL MATERIAL**

D	DUMMY
M-R1/4	R1/4
M-R3/8	R3/8
M-R1/2	R1/2
M-2MSV	WITH 2MSV PLUG
M-3MSV	WITH 3MSV PLUG
M-4MSV	WITH 4MSV PLUG
HNBR	HNBR
CR	VITON
FKM	NEOPRENE

TGPL Series

QUICK ACTION COUPLER



FEAUTURES


- ▶ TGPL Coupler is developed to seal the outer surface of the tube with the packing ring which guarantees superior performance replenishing refrigerants, leak testing & vacuum application.
- ▶ This design overcomes problems caused by variations in outer diameter of copper tube.
- ▶ The external sealing by lever allows high air tightness which is most suitable for vacuum & helium applications.
- ▶ Different packing & sealing materials are available to suit application requirements in air conditioning & refrigeration lines.
- ▶ This design is user friendly for the operator.
- ▶ Maintenance is very simple & quick.
- ▶ Employs lever operation system for easy detaching.

APPLICATION

- 1) The TGPL series is a simple device which clamps the pipe when inserted inside & then by pushing the thumb lever with your thumb which completes the first stage of locking.
- 2) The second stage locking happens when the black handle lever is moved to 90° angle which pushes the rubber seal to hold the od of the tube from inside the coupling.
- 3) The series is extremely useful in airtight pressure leak testing applications.

SPECIFICATION

Material of Construction	Brass , Stainless Steel &Aluminium			
Working Pressure	Refer Table			
Pressure Assistance	Refer Table			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Refrigerant, Refrigerant oil, Air, Helium, Nitrogen	Neoprene	CR	-20°C ~ +80°C
	Air, Helium, Nitrogen	Viton	FKM	-15°C ~ +180°C
	For R134a R410a Gases	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen, Helium	Nitrile	NBR	-20°C ~ +80°C

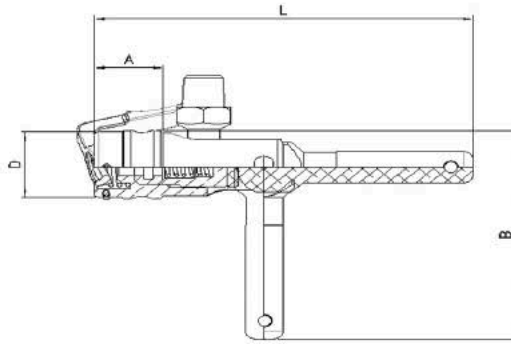

MODEL	Pipe Size	L (mm)	D (mm)	B (mm)	Thread Size	Insertion length (A)	Working Pressure	Pressure Resistance
TGPL-360	3.60	111	26.0	68.0	R 1/4, R 3/8	22.0	2.90 Mpa (30 Kgf/cm ²)	4.41 Mpa (45 Kgf/cm ²)
TGPL-400	4.00	111	26.0	68.0	R 1/4, R 3/8	22.0		
TGPL-476	4.76	111	26.0	68.0	R 1/4, R 3/8	22.0		
TGPL-600	6.00	111	26.0	68.0	R 1/4, R 3/8	22.0		
TGPL-635	6.35	111	26.0	68.0	R 1/4, R 3/8	22.0		
TGPL-700	7.00	115	26.0	68.0	R 1/4, R 3/8	23.0		
TGPL-750	7.50	115	26.0	68.0	R 1/4, R 3/8	23.0		
TGPL-800	8.00	115	26.0	68.0	R 1/4, R 3/8	26.0		
TGPL-840	8.40	115	26.0	68.0	R 1/4, R 3/8	26.0		
TGPL-952	9.52	115	26.0	68.0	R 1/4, R 3/8	28.0		
TGPL-1270	12.70	152	34.0	102.0	R 1/4, R 3/8	30.0	2.45 Mpa (25 Kgf/cm ²)	3.43Mpa (35 Kgf/cm ²)
TGPL-1587	15.87	152	34.0	102.0	R 1/4, R 3/8	30.0	1.96 Mpa (20 Kgf/cm ²)	2.94 Mpa (30 Kgf/cm ²)
TGPL-1820	18.20	138	42.0	98.0	R 1/4, R 3/8, R 1/2	35.0		
TGPL-1905	19.05	138	42.0	98.0	R 1/4, R 3/8, R 1/2	35.0		

ORDERING INFORMATION

TGPL-635-M-R3/8-

HNBR

1

PIPE SIZE

2

**CONNECTION
SIZE**

3

**PACKING/
SEAL MATERIAL**

D	DUMMY
M-R1/4	R1/4
M-R3/8	R3/8
M-R1/2	R1/2
M-2MSV	WITH 2MSV PLUG
M-3MSV	WITH 3MSV PLUG
M-4MSV	WITH 4MSV PLUG

HNBR	HNBR
CR	NEOPRENE
FKM	VITON
NBR	NITRILE

TCC Series

QUICK ACTION COUPLER



FEAUTURES

- This series is mainly used for helium leak testing, Gas charging & vacuum applications.
- TCC couplers are designed such a way that the they not only provide leak free connections but also increase the life of the seal & prevents the damage of copper tube.
- Can be used for Straight, Expanded, Short & Swaged tubes.
- Has a double lock mechanism, when the tube is inserted both the collet & seal clamps the outer / inner diameter of the tube simultaneously.
- Minimum maintenance is required and worn out seals are easily replaced
- These couplers are designed to withstand high pressures.

- TCC SERIES - I (External clamping & External sealing)
- TCC SERIES - II (External clamping & External sealing)
- TCC SERIES - III (External clamping & External sealing)

APPLICATION

- 1) These couplers mainly work on collet mechanism, when the tube is inserted inside the coupler & the lever is made to move to a horizontal position which then secures/seals the outer diameter of the tube.
- 2) To disconnect the tube from the coupler the user simply has to bring back lever to vertical position.

SPECIFICATION

Material of Construction	Stainless Steel, Brass & Aluminium			
Working Pressure	Refer Table			
Pressure Assistance	Refer Table			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Refrigerant, Refrigerant oil, Air, Helium, Nitrogen	Neoprene	CR	-20°C ~ +80°C
	Air, Helium, Nitrogen	Viton	FKM	-15°C ~ +180°C
	For R134a R410a Gases	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen, Helium	Nitrile	NBR	-20°C ~ +80°C

Series - I



MODEL	Pipe Size	L (mm)	D (mm)	Thread Size	Insertion length (A)	Working Pressure	Pressure Resistance
TCC-320	3.20	133.0	Ø24.5	R 1/4, R 3/8	30	3.9 Mpa (40 Kg/cm ²)	5.0 Mpa (52 Kg/cm ²)
TCC-400	4.00			R 1/4, R 3/8			
TCC-476	4.76			R 1/4, R 3/8			
TCC-550	5.50			R 1/4, R 3/8			
TCC-600	6.00			R 1/4, R 3/8			
TCC-635	6.35			R 1/4, R 3/8			
TCC-700	7.50			R 1/4, R 3/8			
TCC-800	8.00			R 1/4, R 3/8			
TCC-952	9.52			R 1/4, R 3/8			
TCC-1000	10.00			R 1/4, R 3/8			

Series - II



MODEL	Tube Size		Minimum Insertion Length	Working Pressure	Pressure Resistance
	OD	ID			
TCC/1110/952/L15	11.10	9.52	15	3.9 Mpa (40 Kgf/cm ²)	5.0 Mpa (52 Kgf/cm ²)
TCC/1140/952/L15	11.40	9.52	15		
TCC/1200/1000/L15	12.00	10.00	15		
TCC/1270/952/L15	12.70	9.52	15		
TCC/1270/1100/L15	12.70	11.00	15		
TCC/1350/1200/L15	13.50	12.00	15		
TCC/1400/1200/L15	14.00	12.00	15		
TCC/1430/1270/L15	14.30	12.70	15		
TCC/1450/1280/L15	14.50	12.80	15		
TCC/1500/1270/L15	15.00	12.70	15		
TCC/1587/1270/L15	15.87	12.70	15		
TCC/1750/1600/L15	17.50	16.00	15		
TCC/1800/1600/L15	18.00	16.00	15		
TCC/1905/1587/L15	19.05	15.87	15		
TCC/1905/1700/L15	19.05	17.00	15		
TCC/2130/1940/L15	21.30	19.40	15		
TCC/2150/1920/L15	21.50	19.20	15		
TCC/2225/1905/L15	22.25	19.05	15		

MODEL	Tube Size		Minimum Insertion Length	Working Pressure	Pressure Resistance
	OD	ID			
TCC/2225/2000/L15	22.25	20.00	15	2.9 Mpa (30 Kgf/cm ²)	3.9 Mpa (40 Kgf/cm ²)
TCC/2440/2240/L15	24.40	22.40	15		
TCC/2470/2240/L15	24.70	22.40	15		
TCC/2500/2000/L15	25.00	20.00	15		
TCC/2790/2540/L15	27.90	25.40	15		
TCC/2860/2540/L15	28.60	25.40	15		
TCC/2860/2600/L15	28.60	26.00	15		
TCC/3100/2880/L15	31.00	28.80	15		
TCC/3175/2915/L15	31.75	29.15	15		
TCC/3280/2880/L15	32.80	28.80	15		
TCC/3450/3180/L15	34.50	31.80	15		
TCC/3490/3210/L15	34.90	32.10	15		
TCC/3500/3220/L15	35.00	32.20	15		
TCC/3760/3520/L15	37.60	35.20	15		
TCC/3800/3520/L15	38.00	35.20	15		
TCC/4060/3810/L15	40.60	38.10	15		
TCC/4560/4160/L15	45.60	41.60	15		

Series - III



MODEL	Tube ID (mm)	Minimum Insertion Length (mm)	Working Pressure	Pressure Resistance
TCC-ISIG-952	9.52	25.0	3.9 Mpa (40 Kgf/cm ²)	5.0 Mpa (52 Kgf/cm ²)
TCC-ISIG-1000	10.0			
TCC-ISIG-1050	10.5			
TCC-ISIG-1110	11.1			
TCC-ISIG-1200	12.0			
TCC-ISIG-1270	12.70			
TCC-ISIG-1430	14.30			
TCC-ISIG-1587	15.87			
TCC-ISIG-1600	16.00			
TCC-ISIG-1800	18.00			
TCC-ISIG-1905	19.05	30.0	2.9 Mpa (30 Kgf/cm ²)	3.9 Mpa (40 Kgf/cm ²)
TCC-ISIG-2000	20.0			
TCC-ISIG-2220	22.2			
TCC-ISIG-2400	24.0			
TCC-ISIG-2500	25.0			
TCC-ISIG-2540	25.4			

IPC Series


QUICK ACTION COUPLER

FEAUTURES

- Internal pipe clamp series is designed for gripping & sealing the inner diameter of the copper / aluminium pipe.
- Perfect design for continuous connect & disconnect applications.
- Mainly used in places where there are narrow spaces, for eg: Heat Exchangers, Radiators, Fin coils.
- Can be locked & unlocked with a simple lever up-down movement.
- It has multi stage sealing construction to grip the inner diameter of the pipe & the face seal to block the outer diameter of the pipe to provide leak free testing.
- Can be used in both low pressure & high-pressure applications.
- Can be used for pressure tests, leak tests & vacuum tests.

SPECIFICATION

Material of Construction	Stainless steel & Aluminium			
Working Pressure Mpa(Kg/cm2)	3.4(35)			
Pressure Assistance Mpa(Kg/cm2)	3.9(40)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	For High Temperature	Viton	FKM	-15°C ~ +180°C
	For Refrigerant Gases	Neoprene	CR	-20°C ~ +80°C
	For R134a, R410 Gas	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen, Helium	Nitrile	NBR	-20°C ~ +80°C

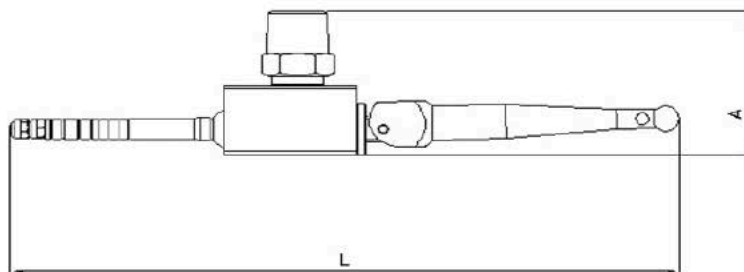

MODEL	Pipe ID (mm)	L (mm)	A (mm)	T
IPC-600	6.00	165.5	41.5	R1/4, R3/8
IPC-635	6.35	165.5	41.5	R1/4, R3/8
IPC-700	7.00	168.5	43.5	R1/4, R3/8
IPC-750	7.50	175.5	44.5	R1/4, R3/8
IPC-800	8.00	176.5	45.5	R1/4, R3/8
IPC-952	9.52	176.5	45.5	R1/4, R3/8
IPC-1000	10.0			R1/4, R3/8
IPC-1110	11.10	179.5	47.5	R1/4, R3/8
IPC-1270	12.70			R1/4, R3/8
IPC-1430	14.30	185.5	48.5	R1/4, R3/8
IPC-1587	15.87			R1/4, R3/8
IPC-1905	19.05			R1/4, R3/8

ORDERING INFORMATION

IPC-750-M-R1/4 -

HNBR

1

PIPE SIZE

2

**CONNECTION
TYPE**

3

**PACKING/
SEAL MATERIAL**

M-R1/4	R1/4
M-R3/8	R3/8
M-2MSV	WITH 2MSV PLUG
M-3MSV	WITH 3MSV PLUG

HNBR	HNBR
CR	NEOPRENE
NBR	NITRILE
FKM	VITON

ODU Series

QUICK ACTION COUPLER



FEAUTES


- The swivel connector directly connects to the male threads on the UNF screws.
- Can be fitted directly to the service valve with help of a hand tool or a pneumatic tool.
- Available in various / different sizes with a variety of sealing material which can be used in the production lines of air conditioners.
- These types of connectors can with stand of 1.3 x 10-1pa to enable use in gas charging, vacuuming & pressure testing

APPLICATION

- 1) This connector directly connects to the male screws of the service valve with the help of a hand tool or a pneumatic tool.
- 2) They are mainly used in the production lines of air conditioner for gas charging & vacuum purpose.
- 3) These types of couplers are also available in elbow type & extended straight types

SPECIFICATION


Material of Construction	Stainless steel (OR) Brass			
Working Pressure	4.9 (50)			
Pressure Assistance	7.4 (75)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	For Refrigerant Gases	Neoprene	CR	-20°C ~ +80°C
	For R134a Gas	HNBR	HNBR	-20°C ~ +120°C

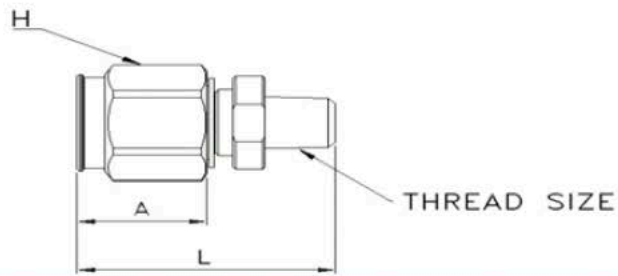

MODEL	T	L (mm)	A (mm)	H (mm)	Thread Size
ODU-SHSS-0716	7/16 -20 UNF	44.0	20.0	27.0	R1/4, R3/8
ODU-SHSS-0508	5/8 -18 UNF	45.0	22.0	27.0	R1/4, R3/8
ODU-SHSS-0304	3/4 -16 UNF	48.0	24.0	27.0	R1/4, R3/8
ODU-SHSS-0708	7/8 -14 UNF	52.0	26.0	27.0	R1/4, R3/8
ODU-SHSS-1716	1.1/16 -14 UNF	57.0	26.0	35.0	R1/4, R3/8, R1/2

SHSS – STAINLESS STEEL

SHBR - BRASS

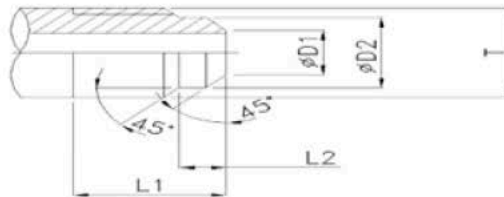

MODEL	T	D1 (mm)	D2 (mm)	L1 (Minimum) (mm)	L2 (mm)
ODU-SHBR-0716	7/16 -20 UNF	5.5	11.3	11.3	3.7
ODU-SHBR-0508	5/8 -18 UNF	8.0	14.0	14.0	4.8
ODU-SHBR-0304	3/4 -16 UNF	11.0	16.8	16.8	5.5
ODU-SHBR-0708	7/8 -14 UNF	13.5	19.9	19.9	6.0
ODU-SHBR-1716	1.1/16 -14 UNF	18.0	24.0	23.4	6.0

ORDERING INFORMATION

ODU-SHSS-0716-M-R1/4

HNBR

1

PIPE SIZE

0716	7/16-20UNF
0508	5/8-18UNF
0304	3/4 -16UNF
0708	7/8-14UNF
1716	1.1/16-14UNF

2

**CONNECTION
TYPE**

M-R1/4	R1/4
M-R3/8	R3/8
M-R1/2	R1/2
M- 2MSV	WITH 2MSV PLUG
M- 3MSV	WITH 3MSV PLUG
M- 4MSV	WITH 4MSV PLUG

3

**PACKING/
SEAL MATERIAL**

HNBR	HNBR
CR	NEOPRENE
NBR	NITRILE

ODU-AUT Series

QUICK ACTION COUPLER



FEAUTURES



- Directly connects to the male threads on the UNF screws.
- With this Series there is reduction in loss of refrigerant gas.
- Connection is very simple by pushing the sleeve forward the screws of the coupler gets directly connected to the screws of the service valve.
- Ensuring all the way that the claw / jaw grips the screw properly which leads to pressure tight connection in seconds.
- Prevents the use of spanners & threaded connectors which leads to less operator fatigue & helps in less straining of muscles & joints.
- Avoids the user's hands from being frostbitten.
- The construction of these couplers are very robust.

APPLICATION


- 1) Screw couplers are highly sophisticated products which are mainly used in the production lines of air conditioners.
- 2) Connection is very simple, by pushing sleeve forward the UNF thread get directly connected to the service valve & the refrigerant forward the UNF thread get directly connected to the service valve & the refrigerant filling commences.
- 3) To disconnect, the sleeve is pulled backwards & the shut off valve present with the coupler prevents loss of refrigerant.

SPECIFICATION

SPECIFICATION				
Material of Construction	Stainless steel (OR) Brass			
Working Pressure	3.0 (31)			
Pressure Assistance	4.5 (46)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	For Refrigerant Gases	Neoprene	CR	-20°C ~ +80°C
	For R134a Gas	HNBR	HNBR	-20°C ~ +120°C

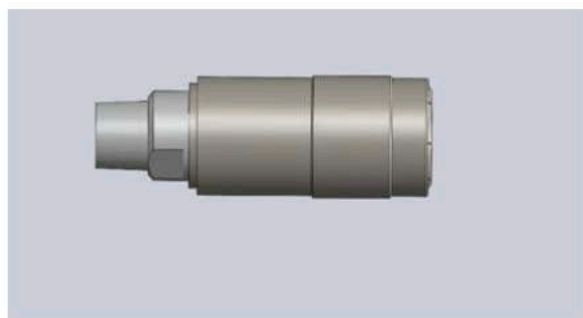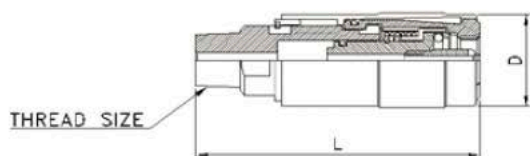

MODEL	T	D (mm)	L (mm)	Thread Size
ODU-AUT-0716	7/16 -20 UNF	26	76	R1/4, R3/8
ODU-AUT-0508	5/8 -18 UNF	30	85	R1/4, R3/8
ODU-AUT-0304	3/4 -16 UNF	34	88	R1/4, R3/8
ODU-AUT-0708	7/8 -14 UNF	38	90	R1/4, R3/8
ODU-AUT-1716	1.1/16 -14 UNF			R1/4, R3/8, R1/2

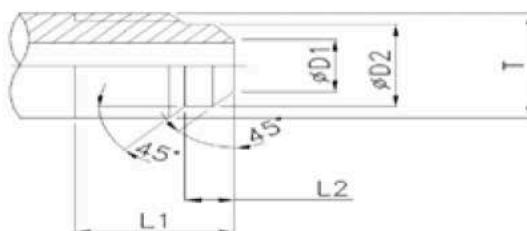

MODEL	T	D1 (mm)	D2 (mm)	L1 (minimum) (mm)	L2 (mm)
ODU-AUT-0716	7/16 -20 UNF	5.5	9.2	11.3	3.7
ODU-AUT-0508	5/8 -18 UNF	8.0	13.5	14.0	4.8
ODU-AUT-0304	3/4 -16 UNF	11.0	16.0	16.8	5.5
ODU-AUT-0708	7/8 -14 UNF	13.5	19.0	19.9	6.0
ODU-AUT-1716	1.1/16 -14 UNF	38	90	90	90

ORDERING INFORMATION

ODU-AUT-0716-M-R1/4 -

HNBR

1

PIPE SIZE

0716	7/16-20UNF
0508	5/8-18UNF
0304	3/4 -16UNF
0708	7/8-14UNF
1716	1.1/16-14UNF

2

**CONNECTION
TYPE**

M-R1/4	R1/4
M-R3/8	R3/8
M-R1/2	R1/2
M- 2MSV	WITH 2MSV PLUG
M- 3MSV	WITH 3MSV PLUG
M- 4MSV	WITH 4MSV PLUG

3

**PACKING/
SEAL MATERIAL**

HNBR	HNBR
CR	NEOPRENE
NBR	NITRILE

MAS Series

QUICK ACTION COUPLER



FEATURES


- It works similar to DS series but the reason why it is called automatic coupler is because it has an inbuilt air pressure automated disconnect mechanism.
- This model is ideal for automated production lines of refrigerators & air conditioners for gas charging & vacuum applications.
- The plug gets automatically separated as and when the air is inserted in the socket.
- Manual separation of plug is also possible in emergency
- Since is automatic, it helps in reduction of operator fatigue & cycle time.
- Comes equipped with a shut off valve which prevents the fluid from flowing out of the hose

APPLICATION

- 1) They are mainly used in the production lines of air conditioner for gas charging & vacuum purpose.
- 2) These types of couplers are also available in elbow type & extended straight types

SPECIFICATION

SPECIFICATION				
Material of Construction	Stainless steel, Aluminium & Brass			
Working Pressure	1.9 (20)			
Pressure Assistance	2.9 (30)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Air, Helium, vacuum	Viton	FKM	-20°C ~ +80°C
	For Refrigerant Gases	Neoprene	CR	-20°C ~ +120°C
	For R134a Gas	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen, Helium	Nitrile	NBR	-20°C ~ +80°C

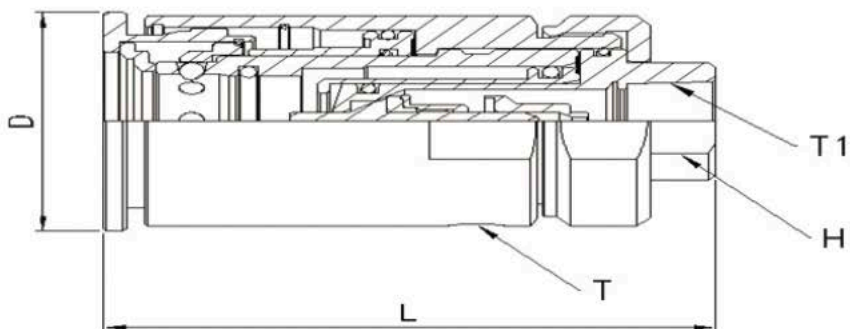

MODEL	CONNECTING SIDE	DIMENSIONS				
		H (mm)	D (mm)	T	L (mm)	T1 (mm)
2 MAS	For Connecting with plugs (2 MSV)	Face width 19	42.0	R1/8	100.0	R1/4
3 MAS	For Connecting with plugs (3 MSV)	Face width 21	42.0	R1/8	96.0	R3/8
4 MAS	For Connecting with plugs (4 MSV)			R1/8		R1/2

ORDERING INFORMATION

2MAS

CR

1

PIPE SIZE

MODEL
2 MAS
3 MAS
4 MAS

2

**PACKING/
SEAL MATERIAL**

HNBR	HNBR
CR	NEOPRENE
NBR	NITRILE
FKR	VITON

HCG Series

QUICK ACTION COUPLER



FEAUTES


- This series is mainly used in high production lines of air conditioners.
- Can be connected & disconnected easily under high pressure just by a lever operation.
- Comes with an inbuilt automatic shut off valve which prevents the fluid/gas from flowing out of the hose when the plug is separated.
- Can be used for refrigerant gas charging, vacuuming & discharging of any residual pressure left.
- Comes equipped with a double o ring packing inside the socket.
- It can be used in high pressure applications of as high as 50kgf/cm².

APPLICATION

- 1) This series is mainly used in high production lines of air conditioners to save cycle time & improve productivity.
- 2) The operation is very simple & easy.
- 3) When In production line the socket lever is pushed backwards & inserted in the plug and then the back lever is raised vertically to 90° angle which results in the opening of valve & flow of fluids.
- 4) To separate the gun from the plug, the latch is again brought in horizontal position & the socket lever is again pushed which results in the disconnection of the plug & also closes the valve.

SPECIFICATION

SPECIFICATION				
Material of Construction	Stainless steel, Aluminium & Brass			
Working Pressure	2.9 (30)			
Pressure Assistance	3.9 (40)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Air, Nitrogen	Viton	FKM	-15°C ~ +180°C
	For Refrigerant Gases	Neoprene	CR	-20°C ~ +80°C
	For R134a Gas	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen	Nitrile	NBR	-20°C ~ +80°C

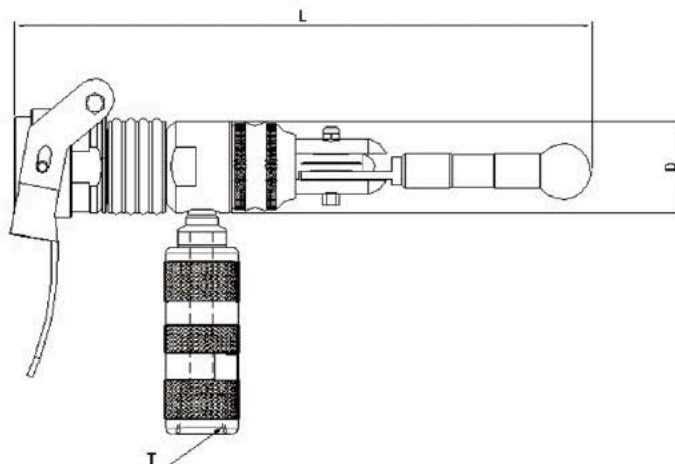

MODEL	CONNECTING SIDE	DIMENSIONS		
		L (mm)	D (mm)	T
HCG-AUT-2MSV	For connecting with plugs (2MSV)	200	32.0	R1/4
HCG-AUT-3MSV	For Connecting with plugs (3 MSV)	200	32.0	R3/8
HCG-AUT-4MSV	For connecting with plugs (4MSV)	220	38.0	R1/2

ORDERING INFORMATION

HCG-AUT-2MSV-

CR

1

PIPE SIZE

MODEL
2 HCG
3 HCG
4 HCG

2

**PACKING/
SEAL MATERIAL**

HNBR	HNBR
CR	NEOPRENE
NBR	NITRILE
FKR	VITON

MCG Series

QUICK ACTION COUPLER



FEAUTURES


- ▶ This series is mainly used in high production lines of air conditioners.
- ▶ Can be connected & disconnected easily under high pressure just by a lever operation.
- ▶ Comes with an inbuilt automatic shut off valve which prevents the fluid/gas from flowing out of the hose when the plug is separated.
- ▶ Can be used for refrigerant gas charging, vacuuming & discharging of any residual pressure left.
- ▶ Comes equipped with a double o ring packing inside the socket.
- ▶ It can be used in high pressure applications of as high as 50kgf/cm².

APPLICATION

- 1) This series is mainly used in high production lines of air conditioners to save cycle time & improve productivity.
- 2) The operator is very simple & easy.
- 3) In the line the socket lever is pushed backward & plug is inserted then the latch is raised vertically to 90° resulting in the opening of valve & flow of fluids.
- 4) To separate the gun from the plug, the latch is again brought in horizontal position & the socket lever is again pushed which results in the disconnection of plug & also closes the valve.

SPECIFICATION

SPECIFICATION				
Material of Construction	Stainless steel, Aluminium & Brass			
Working Pressure	4.9 (50)			
Pressure Assistance	7.4 (75)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Air, Nitrogen	Viton	FKM	-15°C ~ +180°C
	For Refrigerant Gases	Neoprene	CR	-20°C ~ +80°C
	For R134a Gas	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen	Nitrile	NBR	-20°C ~ +80°C

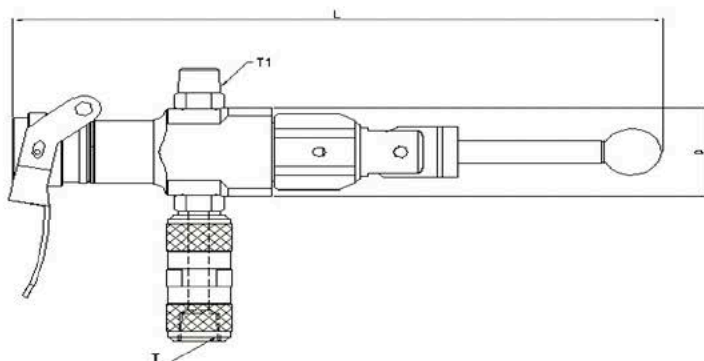

MODEL	CONNECTING SIDE	DIMENSIONS			
		L (mm)	D (mm)	T	T1
MCG-2MSV	For connecting with plugs (2MSV)	258	47.0	R1/8	R1/4
MCG-3MSV	For Connecting with plugs (3 MSV)	260	44.0	R1/8	R3/8
MCG-4MSV	For connecting with plugs (4MSV)	260	51.0	R1/8	R1/2

ORDERING INFORMATION

MCG-2MSV-

CR

1

PIPE SIZE

MODEL
2 MCG
3 MCG
4 MCG

2

**PACKING/
SEAL MATERIAL**

HNBR	HNBR
CR	NEOPRENE
NBR	NITRILE
FKR	VITON

MGC Series

QUICK ACTION COUPLER




FEAUTURES

- Perfect for refrigerant charging, vacuuming & run test of air conditioners
- Can be connected & disconnected easily under high pressure just by a lever operation.
- Comes equipped with an inbuilt automatic shut off valve which prevents the fluid /gas from flowing out of the hose when the plug is separated.
- Design prevents the valve from opening if the plug is not connected, even if the lever is operating.


SPECIFICATION

Material of Construction	Stainless steel, Aluminium & Brass			
Working Pressure	4.5(45)			
Pressure Assistance	5.0(50)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	For Refrigerant Gases	Neoprene	CR	-20°C ~ +80°C
	For R134a Gas	HNBR	HNBR	-20°C ~ +120°C

MODEL	SUTABLE PLUG	L (mm)	ØD	L1	A (mm)	T
MGC-2SV	6.00	126.0	33.0	104.0	45.0	R1/4
MGC-3SV	6.35	114.0	35.0	113.0	50.0	R3/8
MGC-4SV	7.00	135.0	40.0	138.0	55.0	R1/2

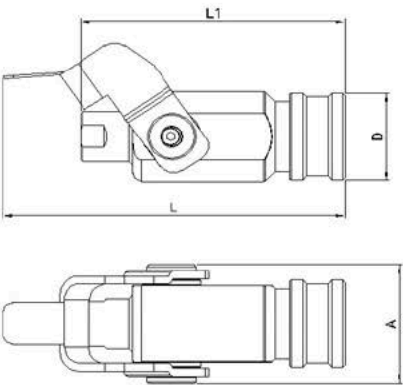

ORDERING INFORMATION

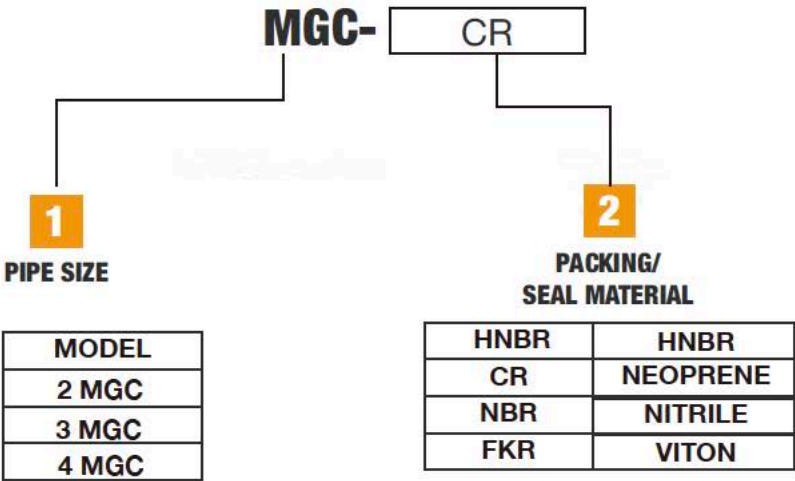

PIP-AUT-Series

QUICK ACTION COUPLER



■ PIP-AUT-BL SERIES

■ PIP-AUT-BL SERIES

■ PIP-AUT-JW SERIES

SPECIFICATION

Material of Construction	Stainless Steel, Brass & Aluminium			
Working Pressure	2.9 (30)			
Pressure Assistance	3.9(40)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Refrigerant, Refrigerant oil, Air, Helium, Nitrogen	Neoprene	CR	-20°C ~ +80°C
	Air, Helium, Nitrogen	Viton	FKM	-15°C ~ +180°C
	For R134a R410a Gases	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen, Helium	Nitrile	NBR	-20°C ~ +80°C

PIP-AUT-BL SERIES



FEAUTURES

- These types of couplers are mainly used in automotive engine leak testing, air conditioners and refrigeration testing.
- Connects / disconnects directly with the insertion of pipe with a simple sleeve operation.
- Equipped with Single stage (or) Multi stage ball lock system which minimizes leakage & avoids in high pressure application.
- Construction is very robust.
- Can used in Expanded, Beaded & Bulged tubes.
- Face seal is provided on the end of the coupler inside. Double seal design is also offered.
- Automatic shut off valve mechanism can be incorporated in coupler if needed.

APPLICATION

- 1) Automobile (Hot test bed, Cold test bed Air leak testing).
- 2) Air condition & refrigeration (Heat exchangers of ODU & IDU).

USAGE

- Pressure tests
- Leak test
- Vacuum pull test
- Durability test

PIP-AUT-CL SERIES



FEAUTES

- Comes with collects used for locking instead of balls.
- Changing the material of the collets makes it possible to take counter measures to prevent scratches to soft materials such as aluminium & copper.
- These types of couplers are mainly used in automotive engine leak testing, air conditioners and refrigeration testing.
- Connects / disconnects directly with the insertion of pipe with a simple sleeve operation.
- Construction is very robust.
- Can used in Expanded, Beaded & Bulged tubes. Automatic shut off valve mechanism can be incorporated in coupler if needed.
- Face seal is provided on the end of the coupler inside. Double seal design is also offered.
- Automatic shut off valve mechanism can be incorporated in coupler if needed.

APPLICATION

- 1) Automobile (Hot test bed, Cold test bed Air leak testing).
- 2) Air condition & refrigeration (Heat exchangers of ODU & IDU).

USAGE

- Pressure tests
- Leak test
- Vacuum pull test
- Durability test

PIP-AUT-JW SERIES



FEAUTURES

- Comes equipped with jaws used for locking instead of balls to lock the outer diameter of the pipe.
- Changing the material of the Jaws makes it possible to make counter measures to prevent scratches to soft materials such as aluminium & copper.
- These types of couplers are mainly used in automotive engine leak testing, air conditioners and refrigeration testing.
- Connects / disconnects directly with the insertion of pipe with a simple sleeve operation.
- Construction is very robust.
- Can used in Expanded, Beaded & Bulged tubes.
- Face seal is provided on the end of the coupler inside. Double seal design is also offered.
- Automatic shut off valve mechanism can be incorporated in coupler if needed.

APPLICATION

- 1) Automobile (Hot test bed, Cold test bed Air leak testing).
- 2) Air condition & refrigeration (Heat exchangers of ODU & IDU).

USAGE

- Pressure tests
- Leak test
- Vacuum pull test
- Durability test

CAR-AC Series

QUICK ACTION COUPLER



FEAUTES

- ▶ These couplers are specially developed for and are widely used by Car Air conditioners manufactures for their special shaped pipe requirements.
- ▶ One touch connection / disconnection with a simple push & pull operation.
- ▶ Multistage sealing for longer durability & productivity.
- ▶ Simultaneous pipe clamping & sealing with a simple push operation.
- ▶ Operator friendly design which results in less operator fatigue.

APPLICATION

- 1) WLT (Water leak testing)
- 2) ALT (Air leak test)
- 3) HLT (Helium leak test)
- 4) NLT (Nitrogen leak test)

USAGE

- Pressure tests
- Leak test
- Vacuum pull test
- Durability test

SPECIFICATION

Material of Construction	Stainless Steel, Brass & Aluminium			
Working Pressure	3.4 (35)			
Pressure Assistance	3.9(40)			
Packing / Seal Material	Applicable Fluids	Rubber	Symbol	Working Temperature
	Refrigerant, Refrigerant oil, Air, Helium, Nitrogen	Neoprene	CR	-20°C ~ +80°C
	Air, Helium, Nitrogen	Viton	FKM	-15°C ~ +180°C
	For R134a R410a Gases	HNBR	HNBR	-20°C ~ +120°C
	Air, Nitrogen, Helium	Nitrile	NBR	-20°C ~ +80°C



MICRON ENGINEERING CORP

Sy.No.627/A & 629/A, Devera Yamjal Village, Shamirpet, Ranga Reddy Dist,
Devarayamjal-5000 014, Hyderabad, A.P. India.

+91-99660-42997

praveen@micronengg.com / micronengg@yahoo.com

www.micronengg.com