

Geometry and inertial sensing enable coordinated obstacle passage

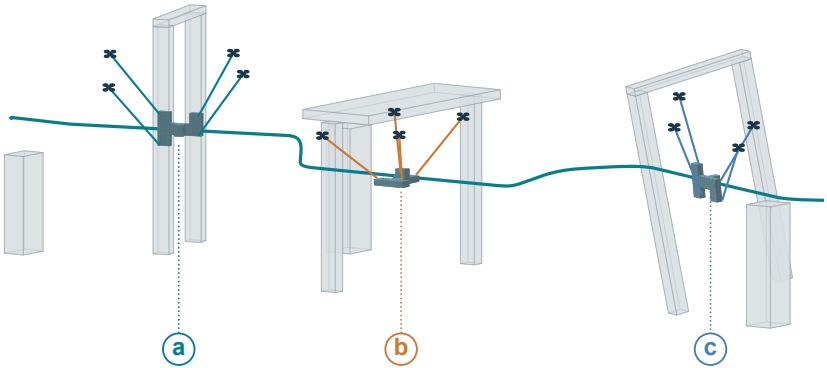


(a) Side-on passage

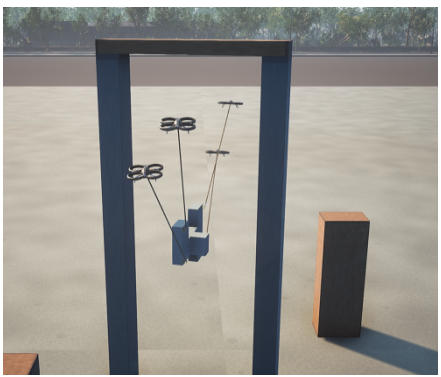


Roll 90° Yaw 15°

(b) Low-ceiling passage

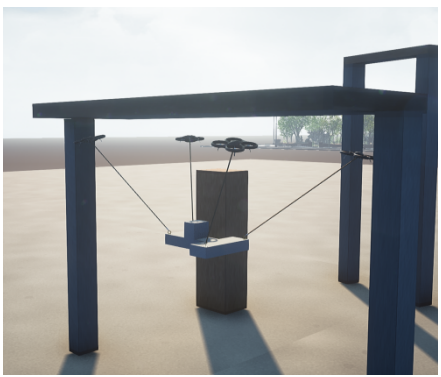

Roll 0° Yaw 90°

(c) Opposite-side passage

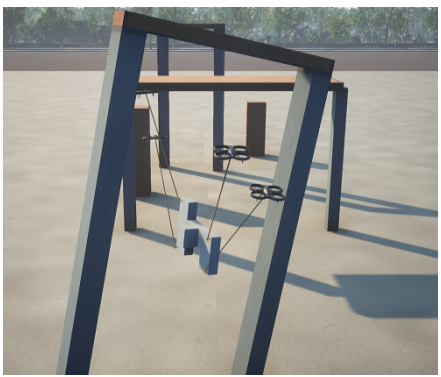

Roll −84° Yaw −25°