



Inverse model: conditional normalizing flow

target ERP spectrum $\rightarrow$ samples of resonator designs; 209,600 parameters

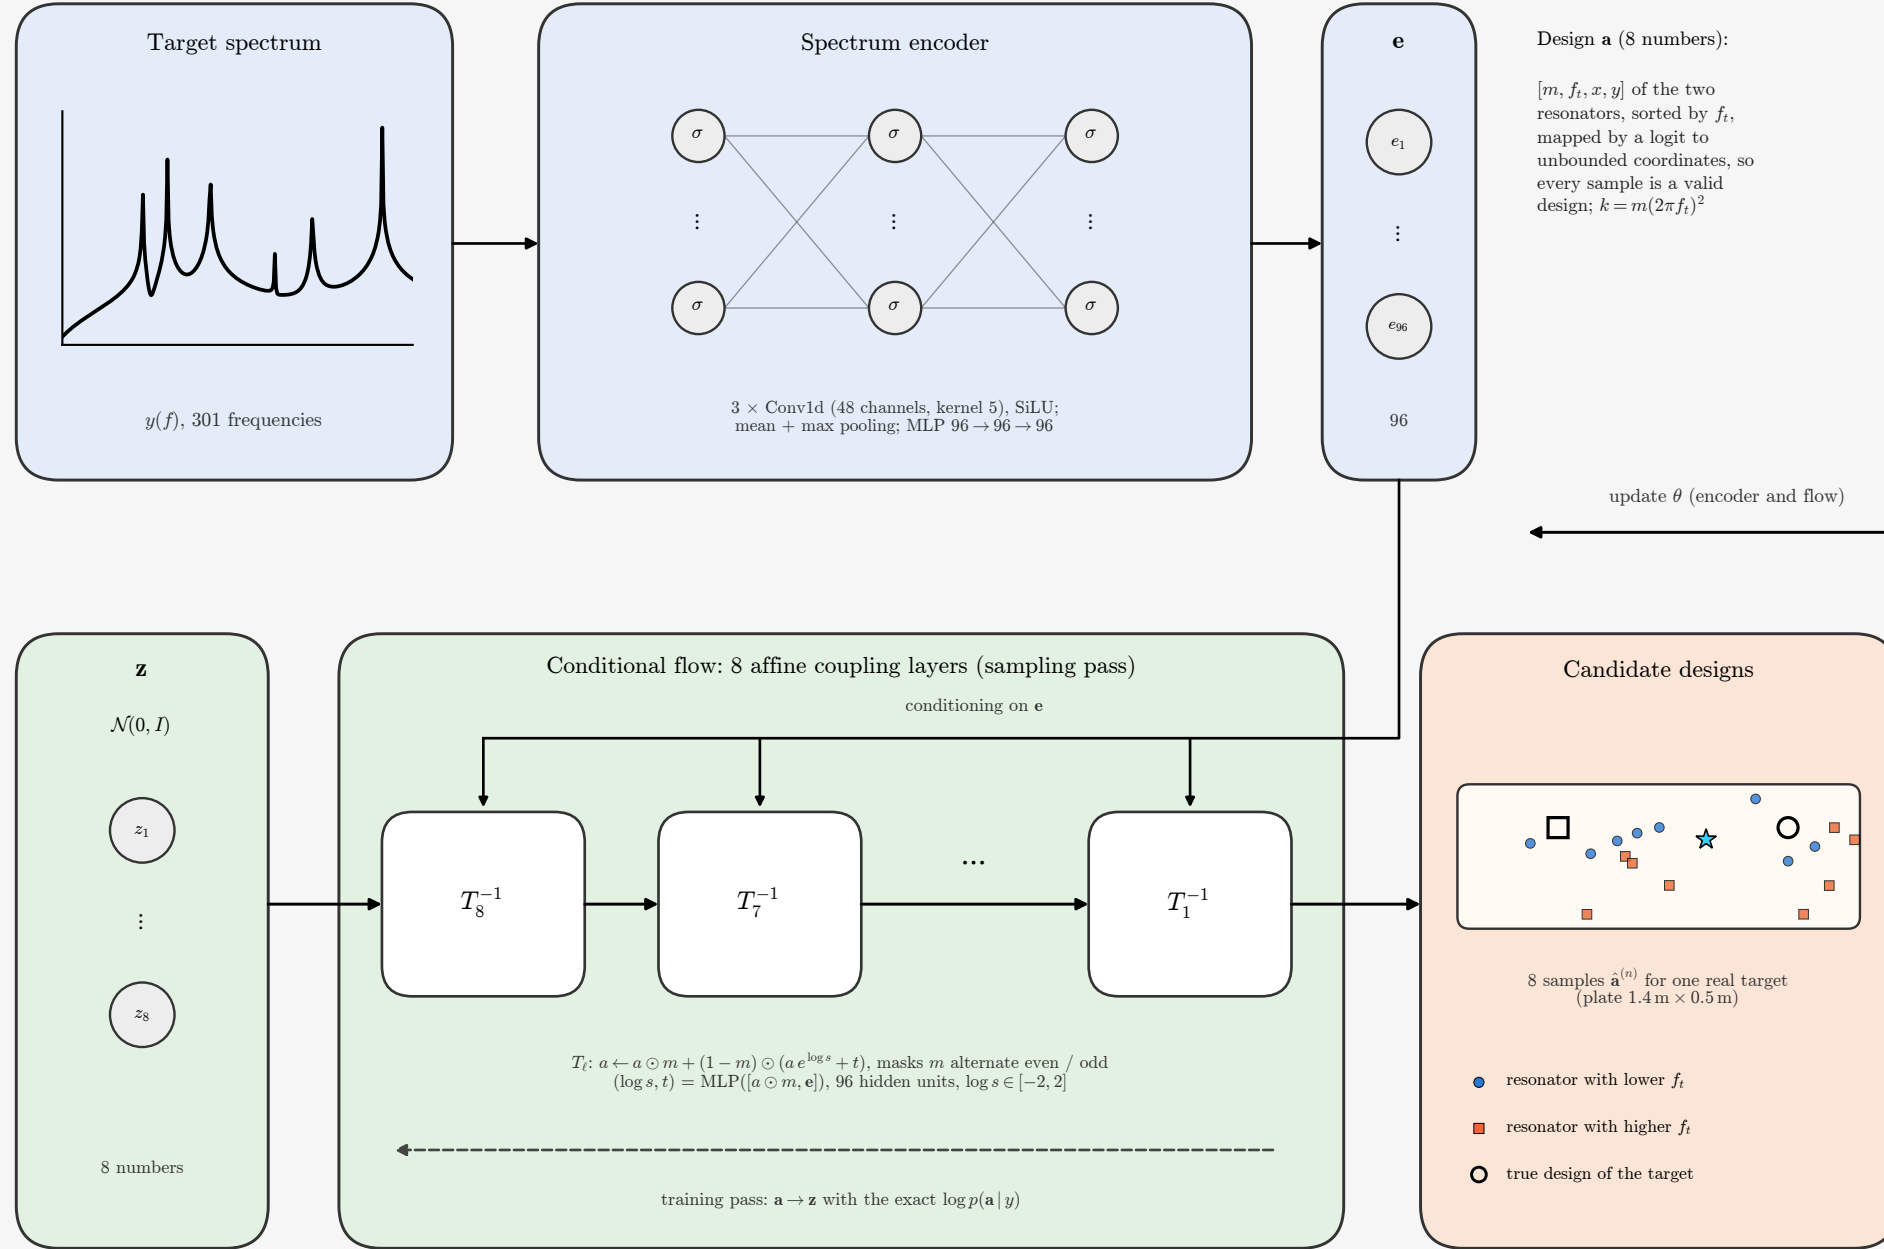

Loss and evaluation

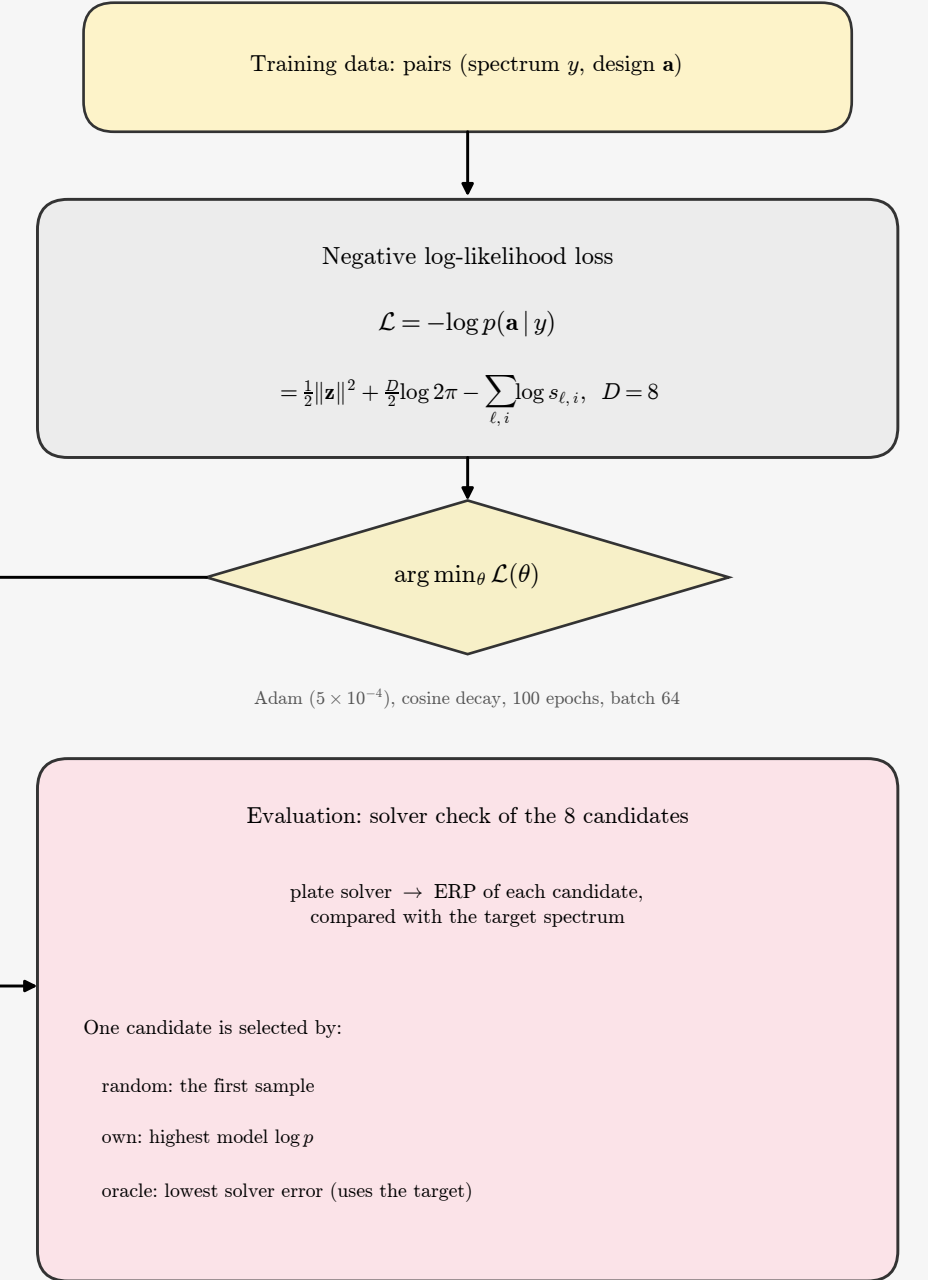

Design $\mathbf{a}$: the two resonators sorted by f_t , each $[m, f_t, x, y]$, mapped by a logit to unbounded coordinates (bounded design space). Data: 100k configurations, 2 resonators on a 14×5 position grid, 18 plate modes, 80/10/10 split.

Other generators trained on the same data: MDN (10 Gaussians), cVAE (latent 8), Diffusion (100 steps), BasisFlow, PadINN.