



Invertible operator: iFNO

one coupling stack run forwards (design $\rightarrow$ ERP) and backwards (ERP $\rightarrow$ designs); 188,405 parameters

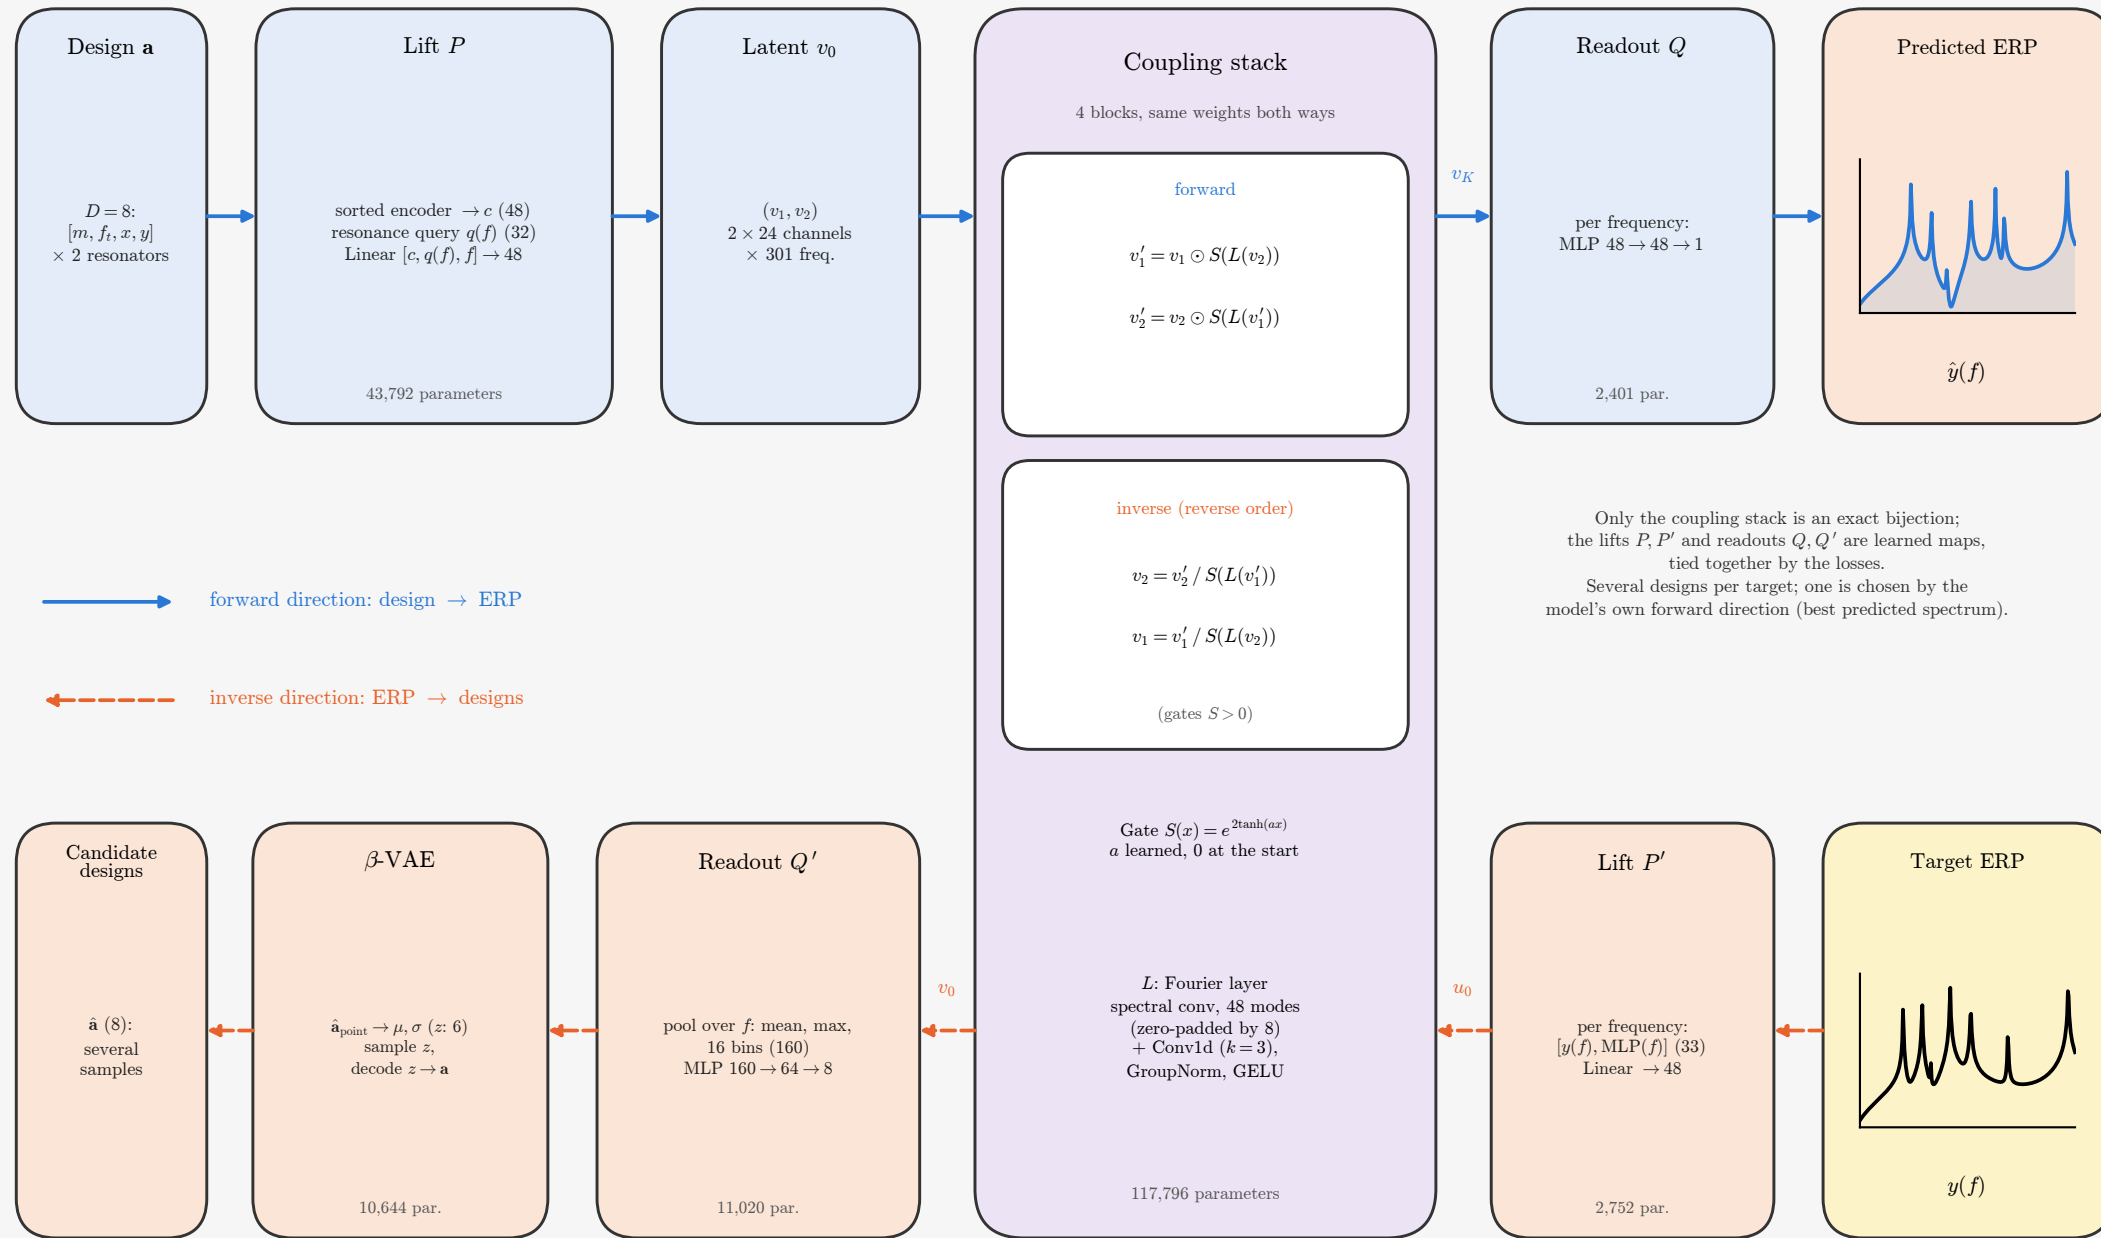

Loss functions

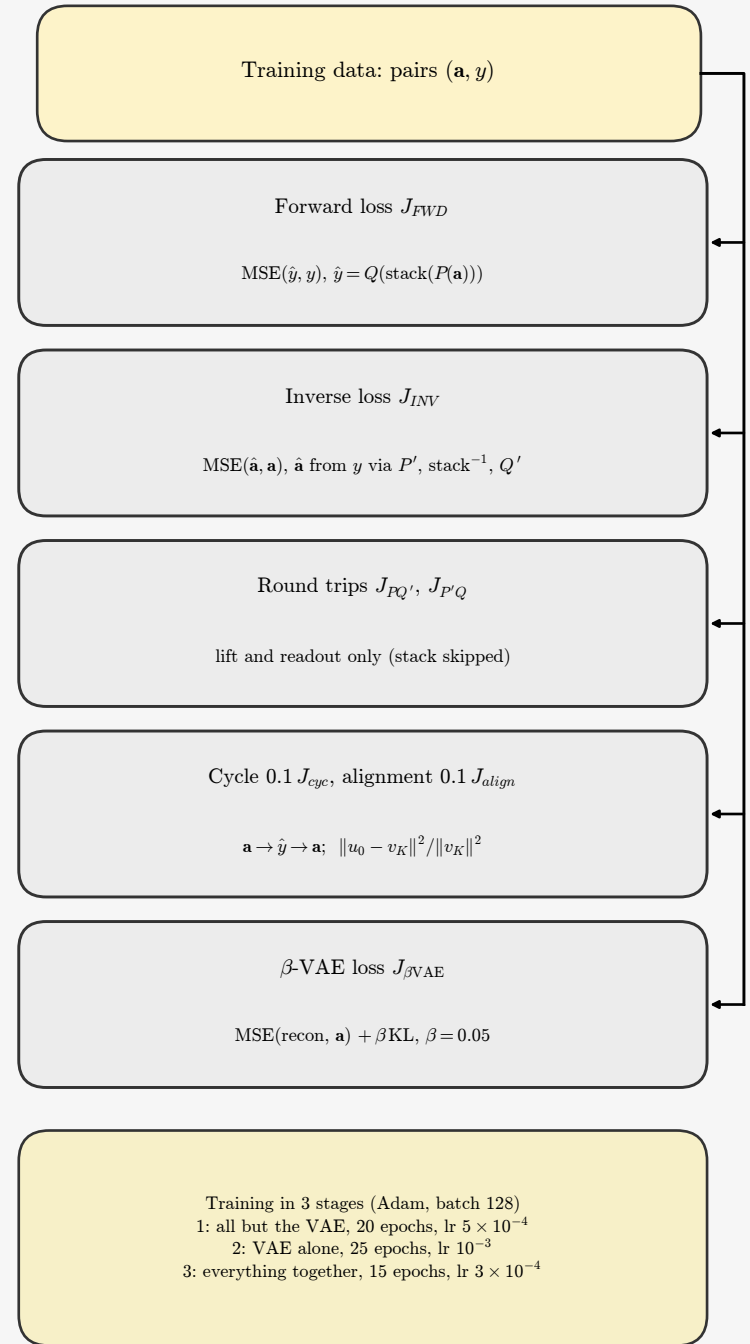

iDCO and iGNO use the same scaffold with the DCO block or the GNO layer as gate L (and a matching lift P). Sorted encoder: MLP $250 \rightarrow 80 \rightarrow 80 \rightarrow 48$ on the two resonators' 125 features each.

Recommended configuration: bounded design coordinates, bounded gate, binned readout, padded FFT, cycle and alignment terms, VAE trained on the stage-1 estimates. Data: 2 resonators, 18 plate modes.