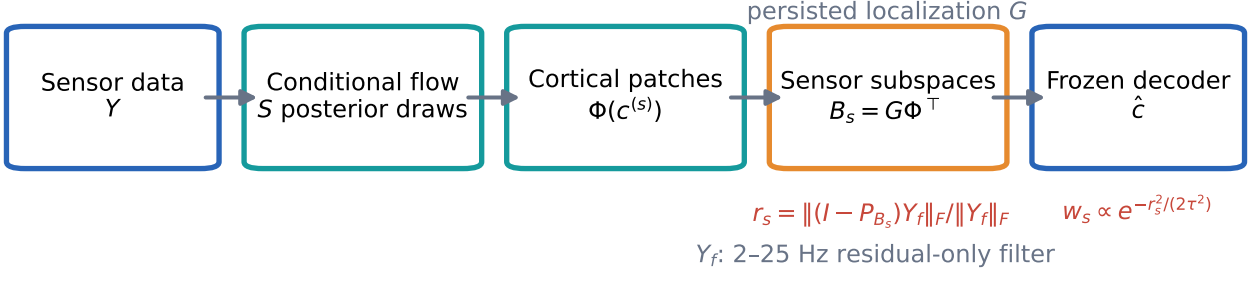
Truth-free decoding: ground-truth centroids are never passed to the estimator
persisted localization G
Sensor data
Y
Conditional flow
S posterior draws
Cortical patches
$\Phi(c^{(s)})$
Sensor subspaces
$B_s = G\Phi^\top$
Frozen decoder
$\hat{c}$
$r_s = \|(I - P_{B_s})Y_f\|_F / \|Y_f\|_F$
$w_s \propto e^{-r_s^2/(2\tau^2)}$
Y_f: 2–25 Hz residual-only filter