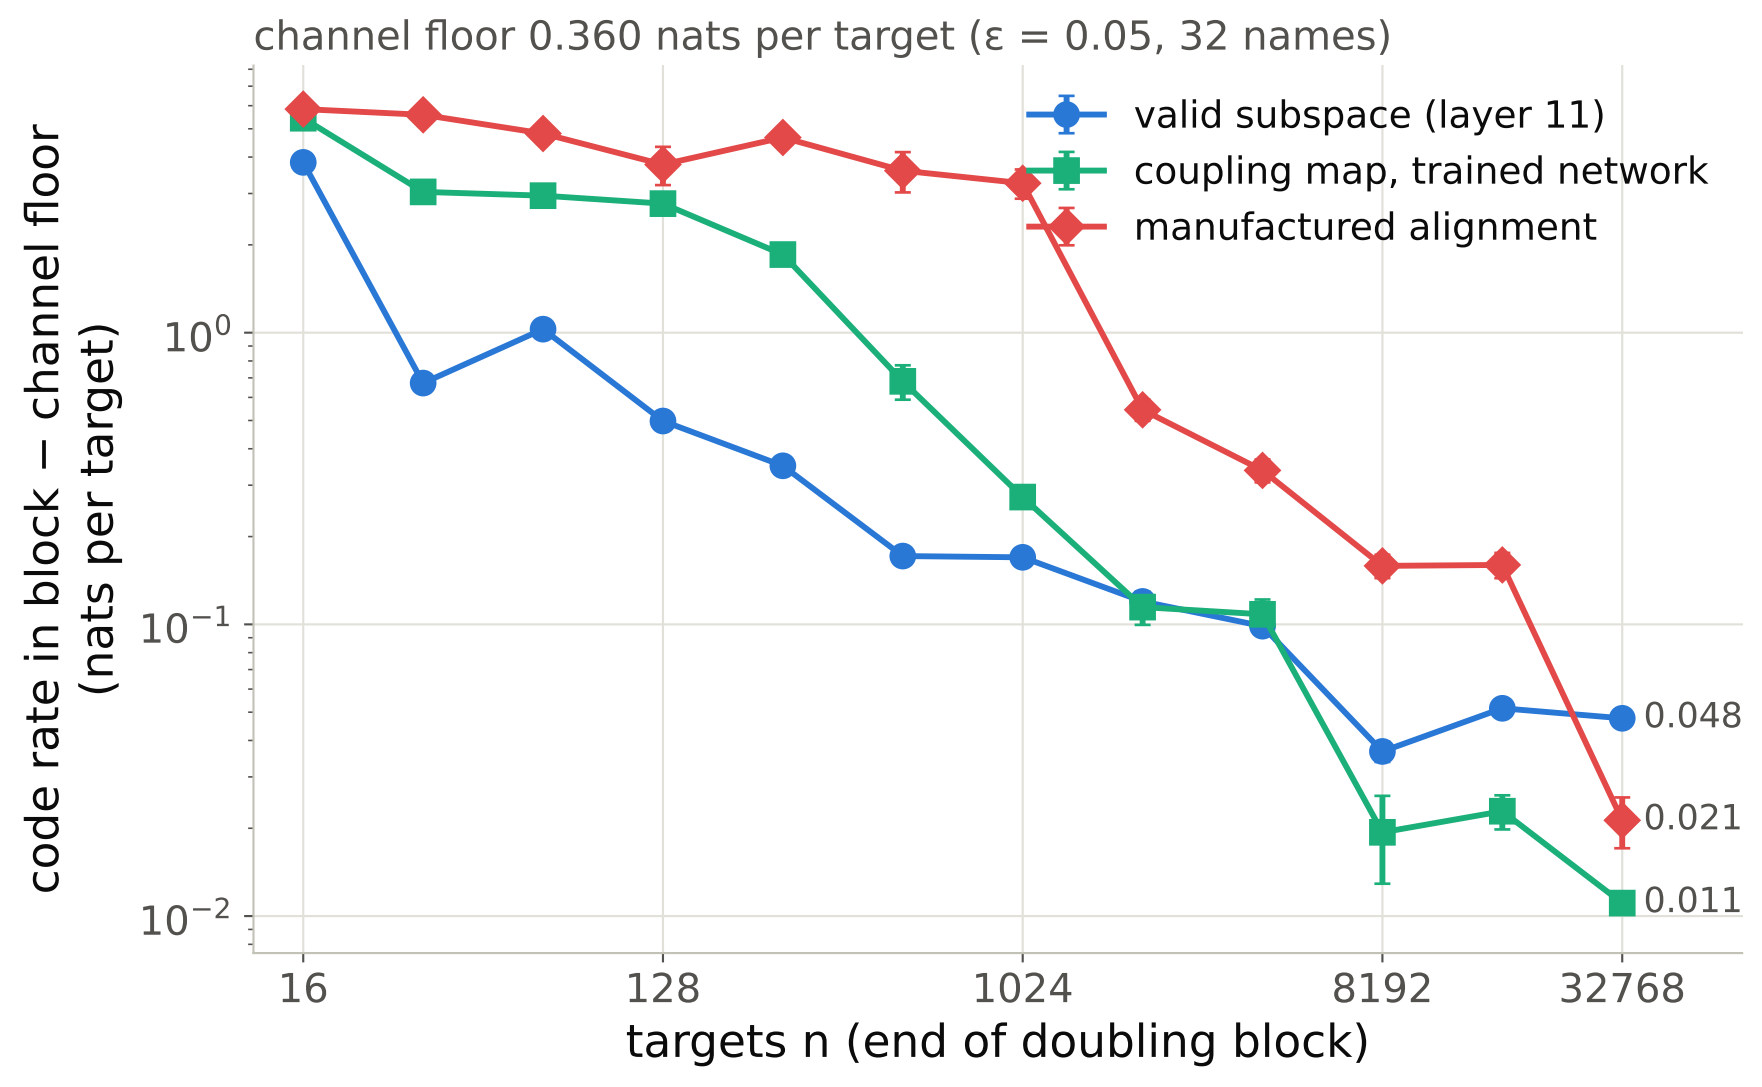
channel floor 0.360 nats per target (ε = 0.05, 32 names)
valid subspace (layer 11)
coupling map, trained network
manufactured alignment
code rate in block − channel floor
(nats per target)
10^{0}
10^{-1}
10^{-2}
0.048
0.021
0.011
16
128
1024
8192
32768
targets n (end of doubling block)