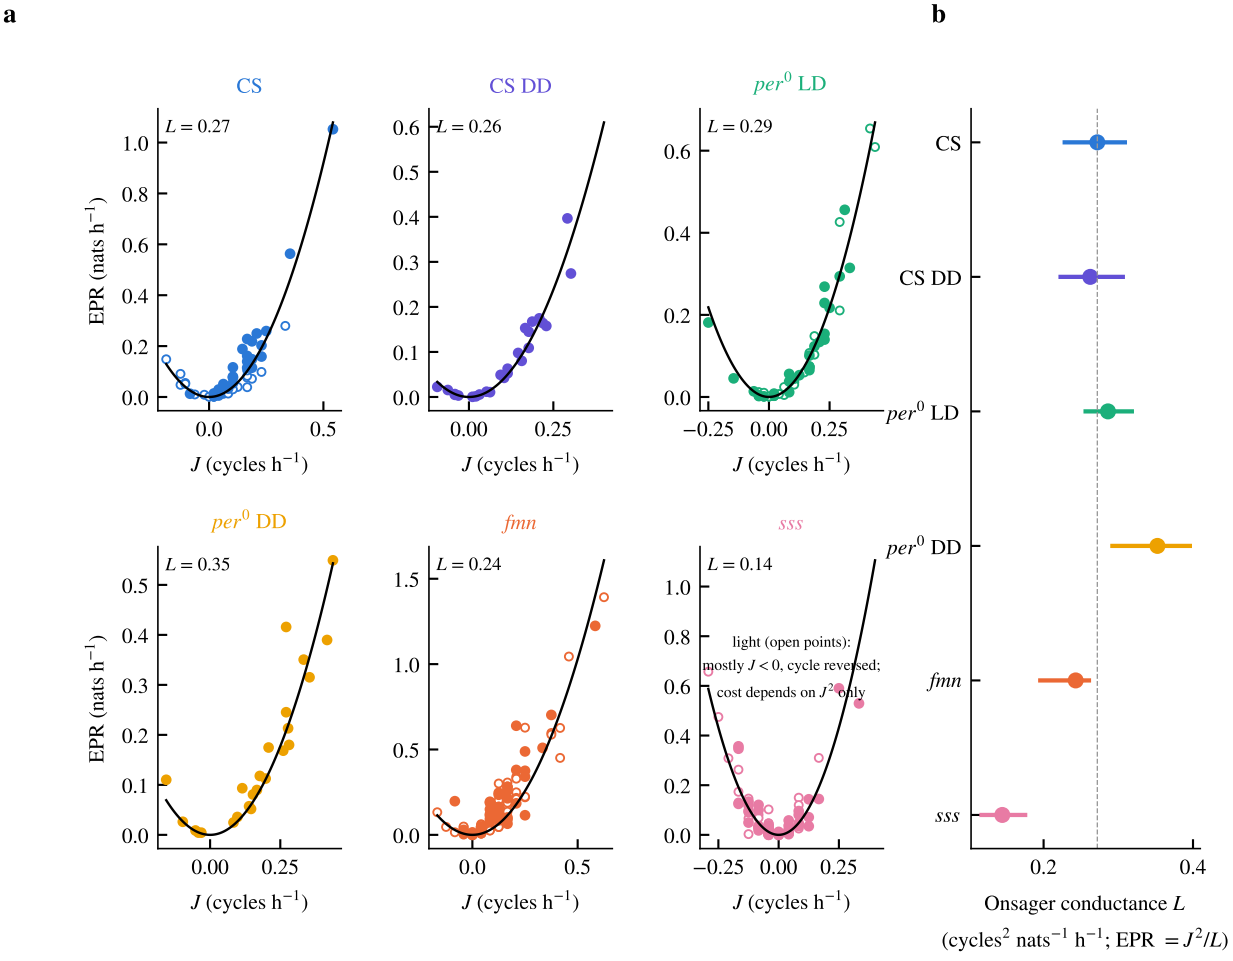
a
b
CS
CS DD
per0 LD
per0 DD
fmn
sss
L = 0.27
L = 0.26
L = 0.29
L = 0.35
L = 0.24
L = 0.14
EPR (nats h−1)
J (cycles h−1)
light (open points):
mostly J < 0, cycle reversed;
cost depends on J2 only
Onsager conductance L
(cycles2 nats−1 h−1; EPR = J2/L)