


ALUNOVA

ALUMINIUM COMPOSITE MATERIAL

Product Details

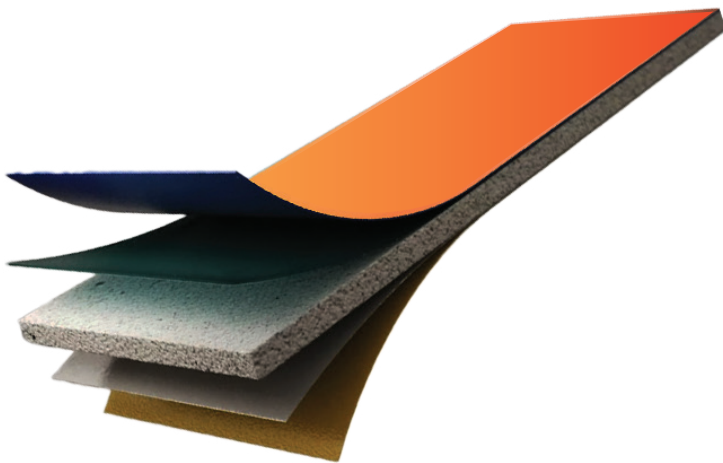

Exceptional Rigidity

Enhanced core composition for improved strength
Smooth, Clean Surface – Ideal for cargo trailers and transport use

Lightweight Construction

Easy handling and installation

Weather & Impact Resistant

Suitable for all environmental condition

Customizable Color Options

Wide range of finishes available

PANEL SPECIFICATIONS

Standard Thickness:	.080" / .012"
Available Widths:	48" / 49"(STANDARD)
Available Lengths:	78", 84", 90 1/2", 96" Standards / Any length up to 197"
Skin Thickness:	0.18mm, 0.18mm
Surface Coating Options:	PVDF / HDPE / PE



PRODUCT COMPOSITION

Alunova panels are manufactured using a patented core technology that blends LDPE with mineral reinforcement, significantly increasing structural integrity while maintaining lightweight properties.

Each panel consists of:

Aluminum skin layers

for strength and resilience

Patented LDPE-*mineral* core

for enhanced rigidity and durability

Advanced surface coating

ensuring resistance to weathering and wear

CONTACT US

Alunova Middle East P.O. Box 30103, Ajman, UAE Tel: +971-6-7487677

Fax: +971-6-7425196

U.S.A : +1 (765) 491-2190

Georgia region : +1 912 381 0417

info@alu-nova.com