NAMA : SHIFFA RAHMADANI
NIM : 09010282327028
KELAS : MI 3A

PRAKTIKUM JARINGAN KOMPUTER (STATIC)

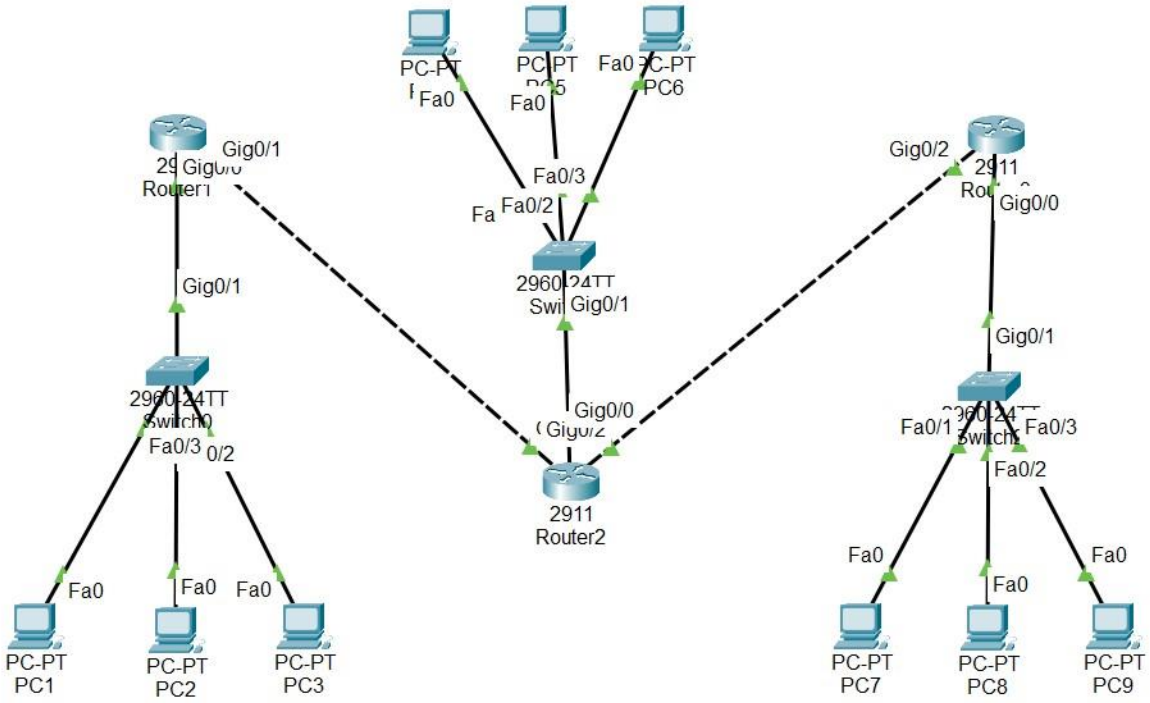

Router 1

```
09010282327028_R1(config)#ip route 192.168.20.0 255.255.255.0 10.10.10.2
09010282327028_R1(config)#ip route 10.20.10.0 255.255.255.255 10.10.10.2
09010282327028_R1(config)#ip route 192.168.40.0 255.255.255.0 10.10.10.2
09010282327028_R1(config)#exit
09010282327028_R1#
%SYS-5-CONFIG_I: Configured from console by console

09010282327028_R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter ar
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.10.10.0/30 is directly connected, GigabitEthernet0/1
L       10.10.10.1/32 is directly connected, GigabitEthernet0/1
S       10.20.10.0/30 [1/0] via 10.10.10.2
S       10.20.10.0/32 [1/0] via 10.10.10.2
     192.168.2.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.2.0/24 is directly connected, GigabitEthernet0/0
L       192.168.2.1/32 is directly connected, GigabitEthernet0/0
S    192.168.20.0/24 [1/0] via 10.10.10.2
S    192.168.40.0/24 [1/0] via 10.10.10.2

09010282327028_R1#
```

Router 2

```
09010282327028_R2(config)#
09010282327028_R2(config)#ip route 192.168.2.0 255.255.255.0 10.10.10.1
09010282327028_R2(config)#ip route 192.168.40.0 255.255.255.0 10.20.10.2
09010282327028_R2(config)#exit
09010282327028_R2#
%SYS-5-CONFIG_I: Configured from console by console

09010282327028_R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.10.10.0/30 is directly connected, GigabitEthernet0/1
L       10.10.10.2/32 is directly connected, GigabitEthernet0/1
C       10.20.10.0/30 is directly connected, GigabitEthernet0/2
L       10.20.10.1/32 is directly connected, GigabitEthernet0/2
S    192.168.2.0/24 [1/0] via 10.10.10.1
     192.168.20.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.20.0/24 is directly connected, GigabitEthernet0/0
L       192.168.20.1/32 is directly connected, GigabitEthernet0/0
S    192.168.40.0/24 [1/0] via 10.20.10.2

09010282327028_R2#
```

Router 3

```
09010282327028_R3(config)#
09010282327028_R3(config)#ip route 192.168.20.0 255.255.255.0 10.20.10.1
09010282327028_R3(config)#ip route 192.168.2.0 255.255.255.0 10.20.10.1
09010282327028_R3(config)#exit
09010282327028_R3#
%SYS-5-CONFIG_I: Configured from console by console

09010282327028_R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.20.10.0/30 is directly connected, GigabitEthernet0/2
L       10.20.10.2/32 is directly connected, GigabitEthernet0/2
S    192.168.2.0/24 [1/0] via 10.20.10.1
S    192.168.20.0/24 [1/0] via 10.20.10.1
     192.168.40.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.40.0/24 is directly connected, GigabitEthernet0/0
L       192.168.40.1/32 is directly connected, GigabitEthernet0/0

09010282327028_R3#
```

Tes Koneksi ICMP

No	Sumber	Tujuan	Hasil	
			Ya	Tidak
1	PC 1	PC 2	Ya	-
		PC 3	Ya	-
		PC 4	Ya	-
		PC 5	Ya	-
		PC 6	Ya	-
		PC 7	Ya	-
		PC 8	Ya	-
		PC 9	Ya	-

No	Sumber	Tujuan	Hasil	
			Ya	Tidak
2	PC 4	PC 1	Ya	-
		PC 2	Ya	-
		PC 3	Ya	-
		PC 5	Ya	-
		PC 6	Ya	-
		PC 7	Ya	-
		PC 8	Ya	-
		PC 9	Ya	-

No	Sumber	Tujuan	Hasil	
			Ya	Tidak
3	PC 7	PC 1	Ya	-
		PC 2	Ya	-
		PC 3	Ya	-
		PC 4	Ya	-
		PC 5	Ya	-
		PC 7	Ya	-
		PC 8	Ya	-
		PC 9	Ya	-

PC 1 --> PC 5

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.3

Pinging 192.168.20.3 with 32 bytes of data:

Reply from 192.168.20.3: bytes=32 time=6ms TTL=126
Reply from 192.168.20.3: bytes=32 time<1ms TTL=126
Reply from 192.168.20.3: bytes=32 time<1ms TTL=126
Reply from 192.168.20.3: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.20.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 6ms, Average = 1ms
```

PC 1 --> PC 5

```
C:\>ping 192.168.40.2

Pinging 192.168.40.2 with 32 bytes of data:

Reply from 192.168.40.2: bytes=32 time<1ms TTL=125
Reply from 192.168.40.2: bytes=32 time<1ms TTL=125
Reply from 192.168.40.2: bytes=32 time<1ms TTL=125
Reply from 192.168.40.2: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.40.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC 4 --> PC 2

```
C:\>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:

Reply from 192.168.2.3: bytes=32 time<1ms TTL=126
Reply from 192.168.2.3: bytes=32 time<1ms TTL=126
Reply from 192.168.2.3: bytes=32 time<1ms TTL=126
Reply from 192.168.2.3: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC 4 --> PC 8

```
C:\>ping 192.168.40.3

Pinging 192.168.40.3 with 32 bytes of data:

Reply from 192.168.40.3: bytes=32 time<1ms TTL=126
Reply from 192.168.40.3: bytes=32 time=1ms TTL=126
Reply from 192.168.40.3: bytes=32 time<1ms TTL=126
Reply from 192.168.40.3: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.40.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC 7 --> PC 3

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.4

Pinging 192.168.2.4 with 32 bytes of data:

Reply from 192.168.2.4: bytes=32 time<1ms TTL=125
Reply from 192.168.2.4: bytes=32 time<1ms TTL=125
Reply from 192.168.2.4: bytes=32 time<1ms TTL=125
Reply from 192.168.2.4: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.2.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC 7 --> PC 9

```
C:\>ping 192.168.40.4

Pinging 192.168.40.4 with 32 bytes of data:

Reply from 192.168.40.4: bytes=32 time<1ms TTL=128
Reply from 192.168.40.4: bytes=32 time<1ms TTL=128
Reply from 192.168.40.4: bytes=32 time<1ms TTL=128
Reply from 192.168.40.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.40.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```