

DE2-115 Control Panel - Part II

數位電路實驗

Author: Trumen

Outline


- SDRAM/SRAM/EEPROM/Flash Controller and Programmer
- VGA
- IR Receiver
- Others
 - USB, PS/2, SD Card, RS232, and HSMC
- Over all Structure of the DE2-115 Control Panel

SDRAM/SRAM/EEPROM/ Flash Controller and Programmer

Memory Controller and Programmer

- The Control Panel can be used to write/read data to/from the SRAM, SDRAM, EEPROM, and Flash chips on the DE2-115 board.
- As an example, we will describe how the **SRAM** may be accessed; the same approach is used to access the SDRAM, EEPROM, and Flash.

Terasic-DE2-115 Control Panel V1.0.1

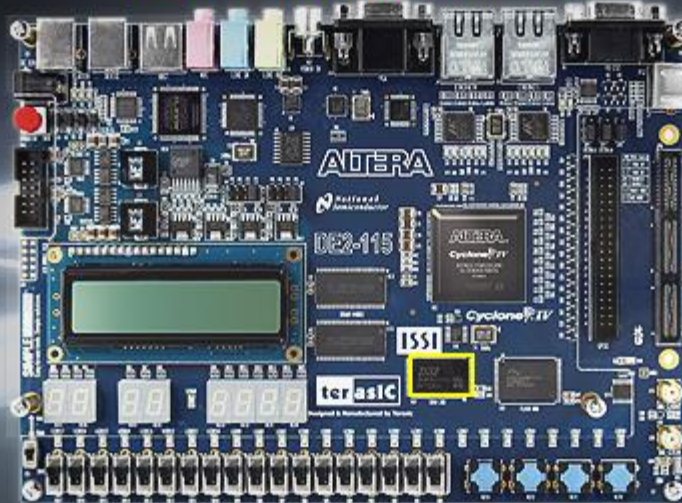

LED LCD

7-SEG PS/2

Switches RS232

Memory VGA

USB HSMC

SD Card IR

Connected DISCONNECT

Memory Type **SRAM (100000h WORDS, 2 MB)**

Random Access

Address: 00000000 wDATA: 0000 rDATA: 0000

Chip Erase (15 sec) Write Read

Sequential Write


Address: 00000000 Length: 0 ☒ File Length

Write a File to Memory

Sequential Read

Address: 00000000 Length: 0 ☐ Entire Memory

Load Memory Content to a File

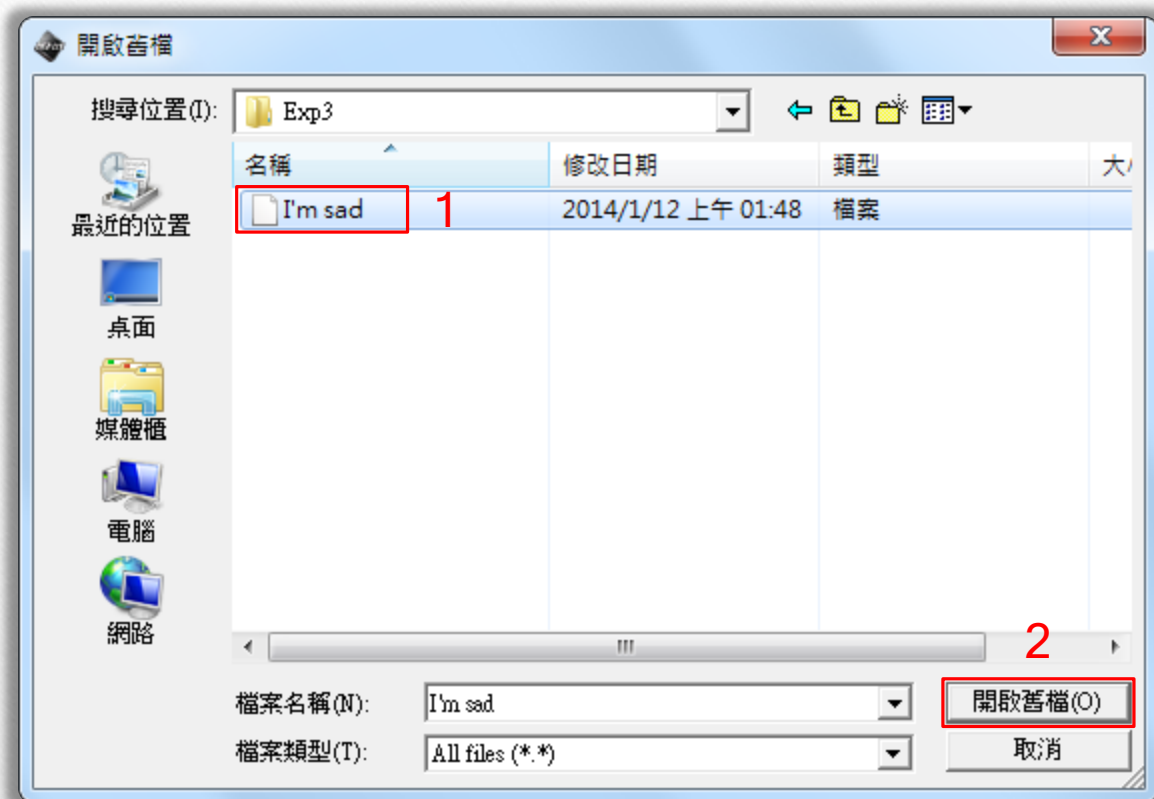

Terasic-DE2-115 Control Panel V1.0.1



Progress

Finish Percentage: 43%



Abort

LED

7-SEG

Switches

Memory

USB

SD Card

VGA

HSMC

IR

Connected

DISCONNECT

ALTERA
UNIVERSITY
PROGRAM

terasic
www.terasic.com

Sequential Write

Address: 00000000

Length: 0

☒ File Length

Write a File to Memory

Sequential Read

Address: 00000000


Length: 0

☐ Entire Memory

Load Memory Content to a File

Write a File to ...

Terasic-DE2-115 Control Panel V1.0.1

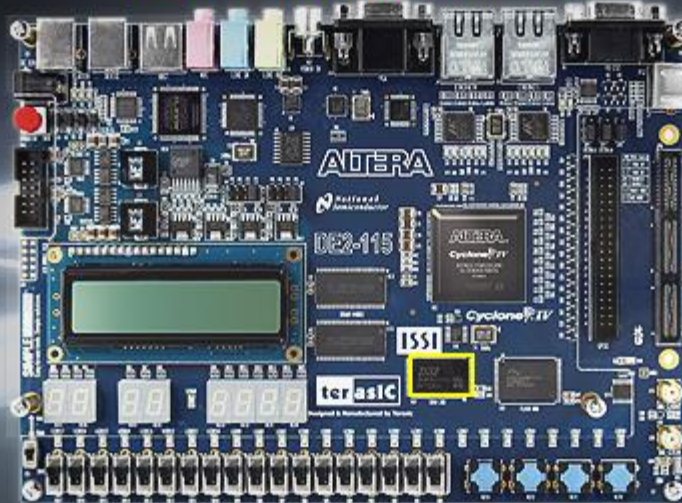

LED	LCD
7-SEG	PS/2
Switches	RS232
Memory	VGA
USB	HSMC
SD Card	IR

Connected

DISCONNECT

Memory Type **SRAM (100000h WORDS, 2 MB)**

Random Access

Address: 00000000

wDATA: 0000

rDATA: 0000

Chip Erase (15 sec)

Write

Read

Sequential Write

Address: 00000000

Length: 100000

☒ File Length

Write a File to Memory

Sequential Read

Address: 00000000

Length: 0

☐ Entire memory

Load Memory Content to a File

Write a File to (null) Success.[439.7sec]


Let's listen to the song!

VGA

VGA Controller

- DE2-115 Control Panel provides VGA pattern function that allows users to output color pattern to LCD/CRT monitor using the DE2-115 board.
- Remember to plug a D-sub cable to VGA connector of the DE2-115 before using the Control Panel.

Terasic-DE2-115 Control Panel V1.0.1

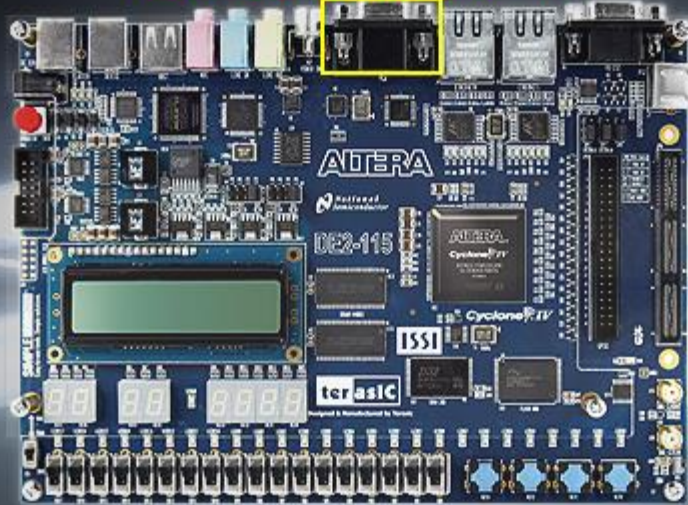


LED	LCD
7-SEG	PS/2
Switches	RS232
Memory	VGA
USB	HSMC
SD Card	IR

Connected DISCONNECT


VGA Pattern Display

Pattern:

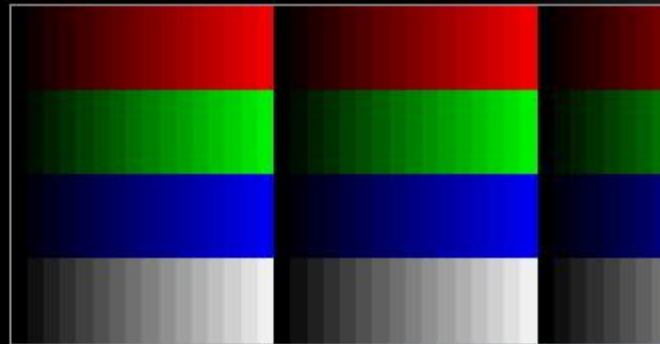

Set VGA Success

Terasic-DE2-115 Control Panel V1.0.1

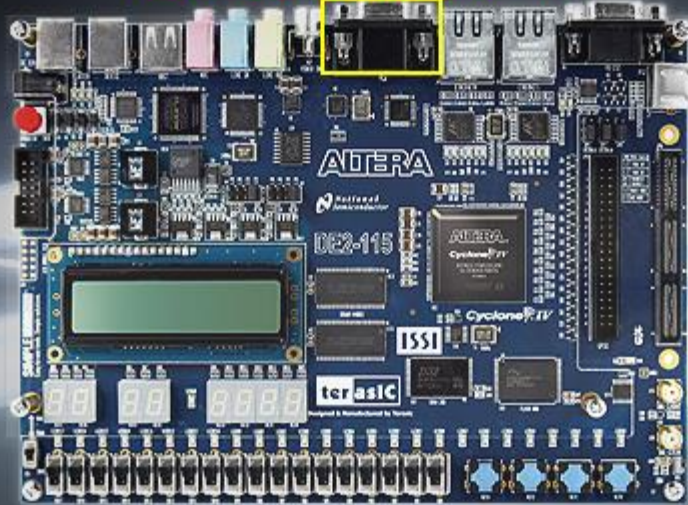

LED	LCD
7-SEG	PS/2
Switches	RS232
Memory	VGA
USB	HSMC
SD Card	IR

Connected

DISCONNECT

ALTERA
UNIVERSITY
PROGRAM

terasic
www.terasic.com

VGA Pattern Display

Pattern:

Scale

Scale


Red

Green

Blue


White

Black

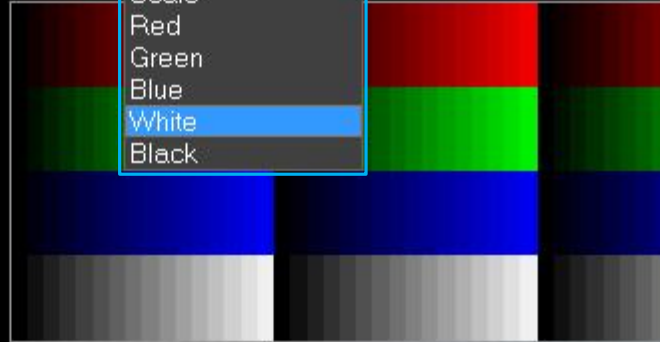

Set VGA Success

Terasic-DE2-115 Control Panel V1.0.1

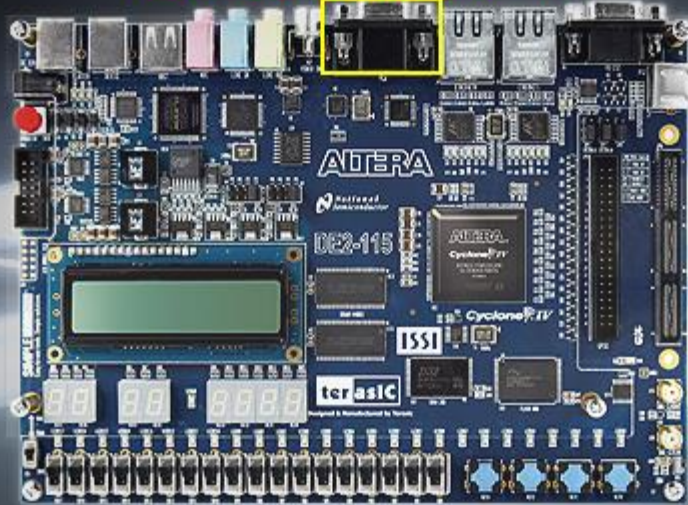

LED	LCD
7-SEG	PS/2
Switches	RS232
Memory	VGA
USB	HSMC
SD Card	IR

Connected

DISCONNECT

ALTERA
UNIVERSITY
PROGRAM
terasic
www.terasic.com

VGA Pattern Display

Pattern:




Set VGA Success

IR Receiver

IR Receiver

- From the control panel, we can test the IR receiver on the DE2-115 by sending **scan code** from a remote controller.
- When the scan code is received, the information will be displayed on the Receiver window represented in **hexadecimal**.
- Also, the **pressed button** on the remote controller will be indicated on the graphic of remote controller on the IR receiver window.

Terasic-DE2-115 Control Panel V1.0.1

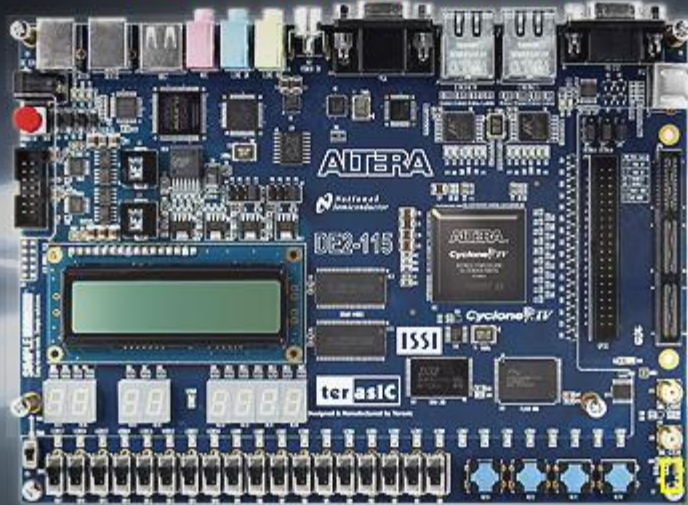

- | | |
|----------|-------|
| LED | LCD |
| 7-SEG | PS/2 |
| Switches | RS232 |
| Memory | VGA |
| USB | HSMC |
| SD Card | IR |

Connected

DISCONNECT

IR Receiver

Scan Code (Heximal)

01
02
03
04
05
06
07
08

Clear




IR Monitor...

Others

USB, PS/2, SD Card, RS232, and HSMC

Terasic-DE2-115 Control Panel V1.0.1

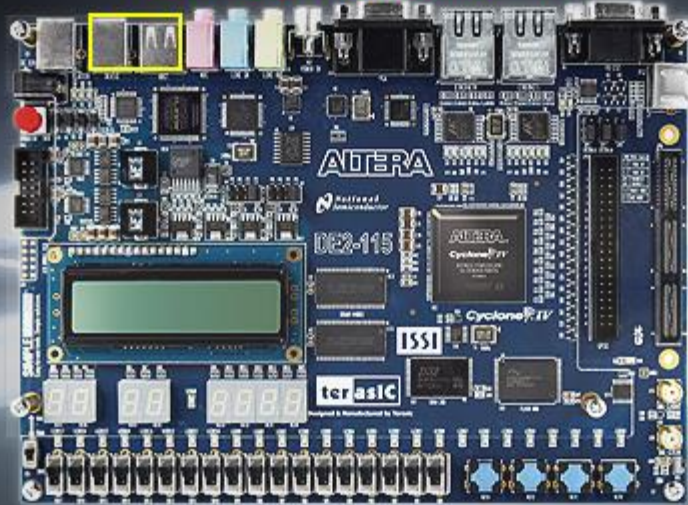

- | | |
|------------|-------|
| LED | LCD |
| 7-SEG | PS/2 |
| Switches | RS232 |
| Memory | VGA |
| USB | HSMC |
| SD Card | IR |

Connected

DISCONNECT


Host Port:

USB Mouse



A device is found in the USB Port.

Terasic-DE2-115 Control Panel V1.0.1

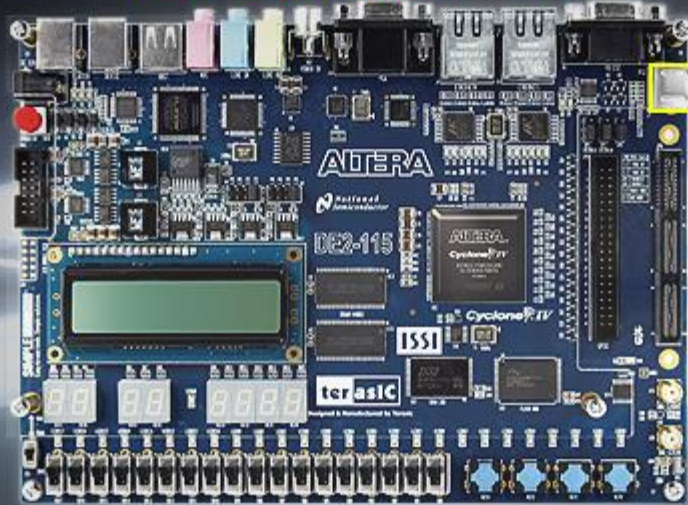

- | | |
|----------|-------|
| LED | LCD |
| 7-SEG | PS/2 |
| Switches | RS232 |
| Memory | VGA |
| USB | HSMC |
| SD Card | IR |

Connected

DISCONNECT


PS/2 Mouse Trace



Stop

PS/2-Mouse Monitor...

Terasic-DE2-115 Control Panel V1.0.1

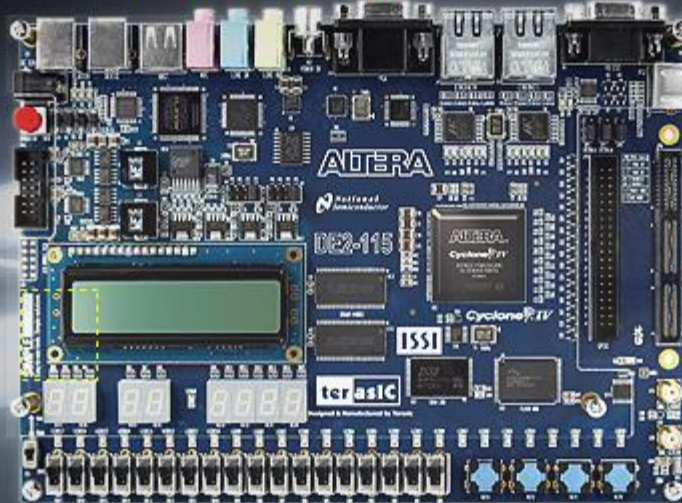

- LED
- LCD
- 7-SEG
- PS/2
- Switches
- RS232
- Memory
- VGA
- USB
- HSMC
- SD Card**
- IR

Connected

DISCONNECT

Card Identification

- Manufacturer ID:03h
- OEM/Application ID:4453h
- Product Name:SD08G
- Product Revision:80h
- Serial No.:018FCAC6h
- Date Code:09Bh



Card Specific Data

- CSD Version 2.0
- Read Access Time:1000 us
- Read Access Time (NSAC):0 (x100 cycle)
- Max. Data Transfer Rate:25 Mbits/s
- Max. Read Data Block Length:512 Byte
- Memory Capacity:7680MB


File System:

FAT32

Read

Read SDCARD read successfully

Terasic-DE2-115 Control Panel V1.0.1

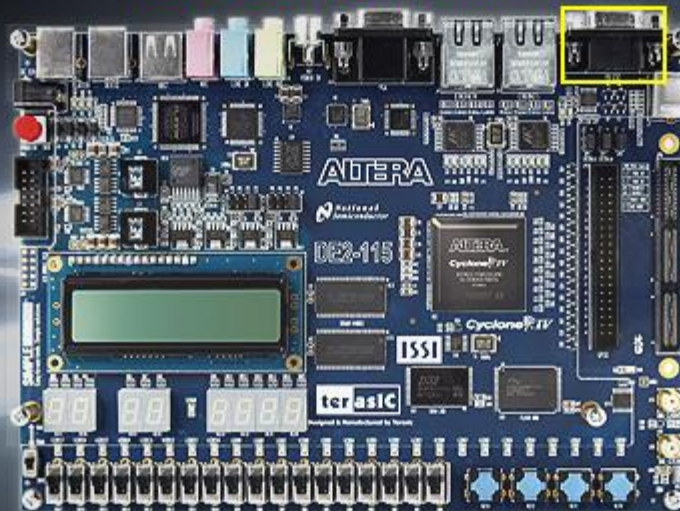

LED	LCD
7-SEG	PS/2
Switches	RS232
Memory	VGA
USB	HSMC
SD Card	IR

Connected

DISCONNECT

RS232 TX/RX

Receive:

I love DCLab!

Clear


Send:

I love DCLab!

Send

RS232 transmit successfully.

Terasic-DE2-115 Control Panel V1.0.1

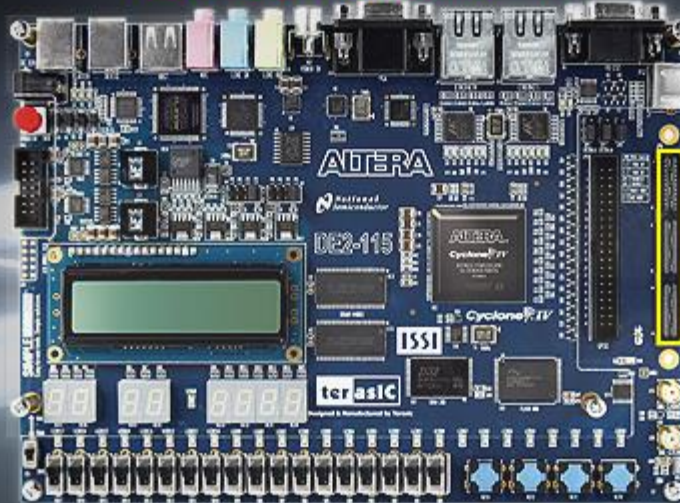

Connected

DISCONNECT

ALTERA
UNIVERSITY
PROGRAM

terasic
www.terasic.com

HSMC Loopback Verify

Loopback Installation

Please make sure the HSMC loopback adapter has connected to the HSMC connector of DE2-115. Otherwise please follow the steps below.

1. Turn off the DE2-115 board
2. Plug the HSMC loopback adapter into the HSMC connector of DE2-115
3. Turn on the the DE2-115 board
4. Re-launch the DE2-115 control panel



Verify

PASS

HSMC Loopback Test: PASS

Over all Structure of the DE2-115 Control Panel



Overall Structure (1/2)

- The DE2-115 Control Panel is based on a **Nios II SOPC system** instantiated in the Cyclone IV E FPGA with software running on the on-chip memory.
- The software part is implemented in **C code**; the hardware part is implemented in **Verilog HDL code** with SOPC builder.
 - The source code is not available on the DE2_115 System CD.

Overall Structure (2/2)

- Each input/output device is controlled by the **Nios II Processor** instantiated in the FPGA chip.
- The communication with the PC is done via the **USB Blaster** link.
- The Nios II interprets the commands set from the PC and performs the corresponding actions.

FPGA/SOPC

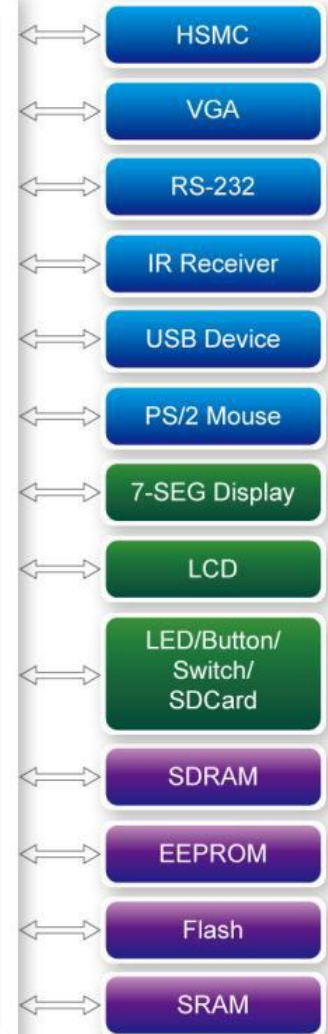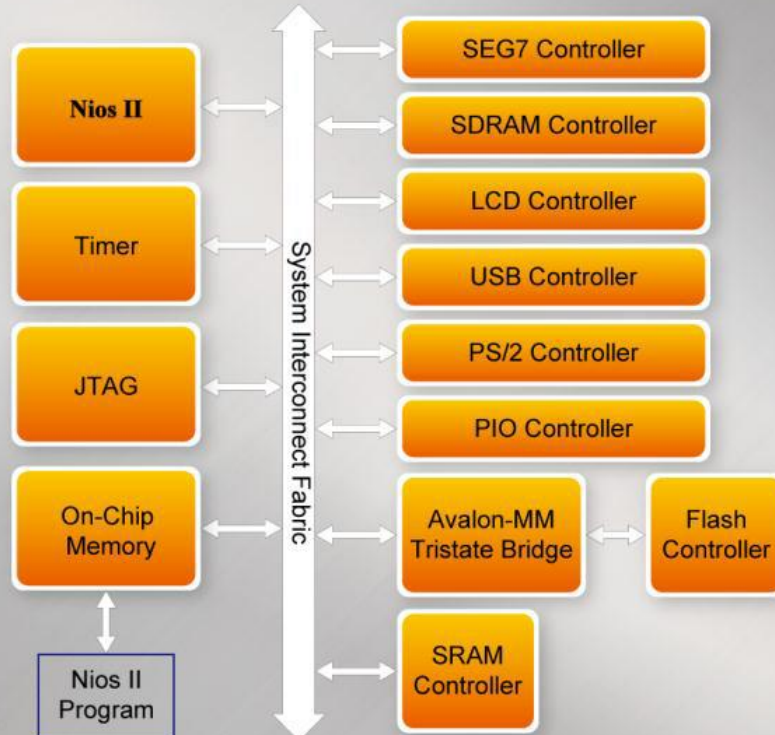

The End.

Any question?

Reference

1. "DE2-115 User Manual" by Terasic Technologies Inc.