



K. R. MANGALAM UNIVERSITY

THE COMPLETE WORLD OF EDUCATION

Computer Networks (ENCS352)

LAB FILE SUBMITTED TO

K. R. Mangalam University

FOR

Bachelor of Technology

in

Computer Science and Engineering

SUBMITTED BY

Shikhar Bajpai (2301010188)

Course Faculty :-Mr.Mohammad Aijaz

School of Engineering & Technology

K. R. MANGALAM UNIVERSITY

Sohna, Haryana 122103, India

Assignment 2: Packet Flow Visualization Using Simulation Mode

Experiment Objectives:-

Students will use Packet Tracer Simulation Mode to observe how packets move between devices, how switches learn MAC addresses, and how ICMP echo request/reply travels through a small network.


Learning Outcomes:-

- Use Simulation Mode effectively
- Observe ARP + ICMP behavior
- Understand switch MAC learning behavior
- Interpret packet event list timeline

Concepts Used:-

- Simulation Mode
- ICMP ping
- ARP resolution
- Switch MAC address table learning

Task 1: Build a Simple LAN

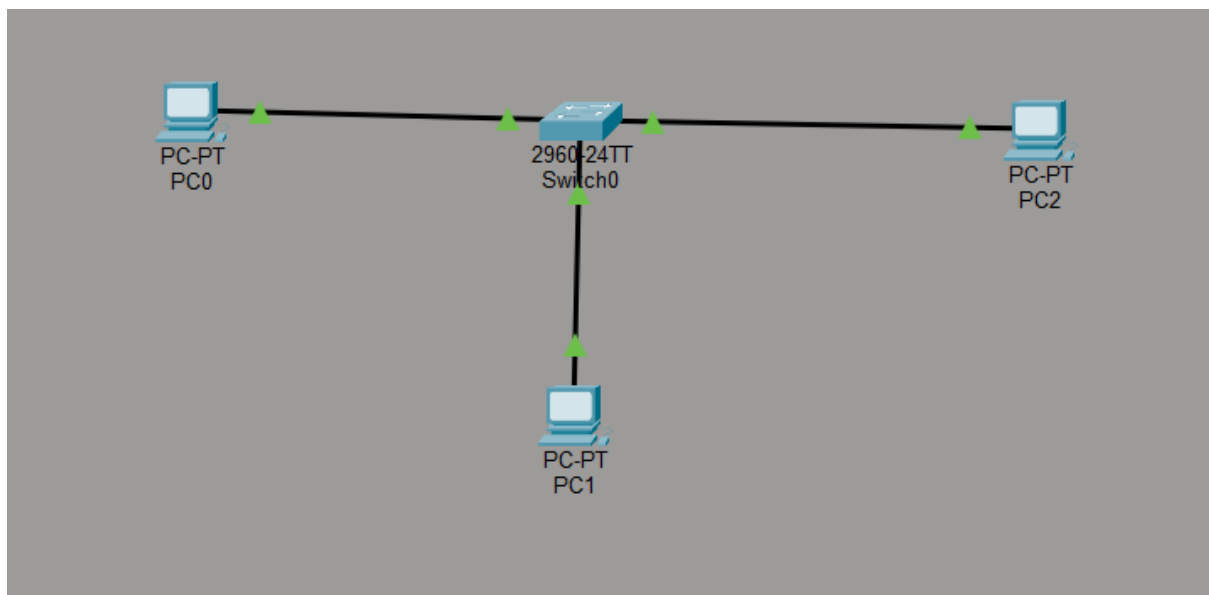

Configuration:-

- 1 Switch (2960)
- 3 PCs connected to switch
- IP addresses assigned:

PC	IP Address	Subnet Mask
PC0	192.168.20.1	255.255.255.0
PC1	192.168.20.2	255.255.255.0
PC2	192.168.20.3	255.255.255.0

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.20.1

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC1

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.20.2

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC2

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.20.3


Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

Task 2: First Ping Observation


- Simulation Mode was enabled..

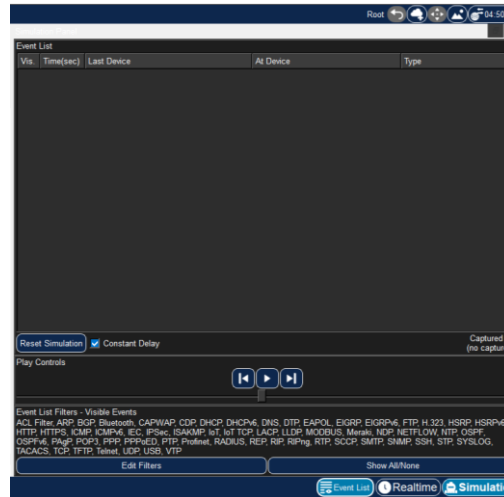

- The Event List filter was set to show only ARP and ICMP.





- A ping was issued from PC1 to PC2 via the Command Prompt: ping 192.168.20.2

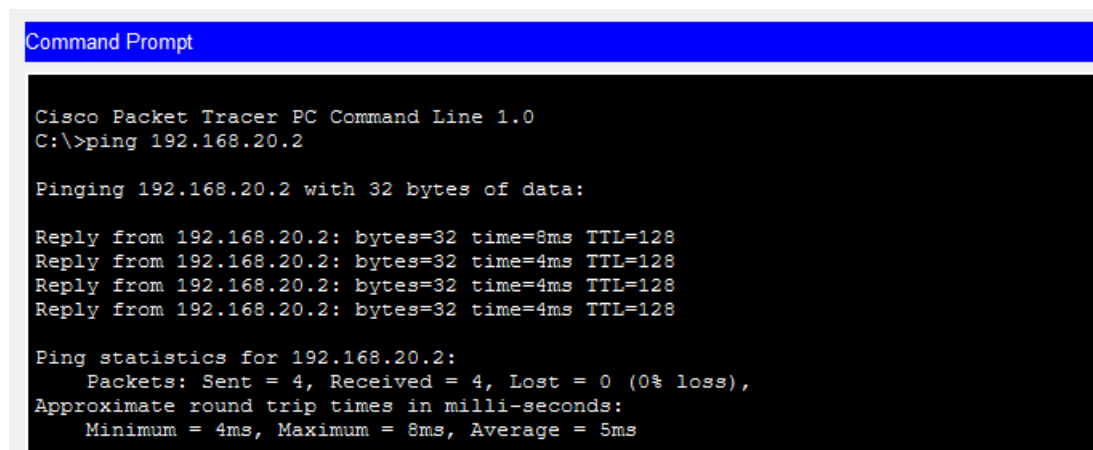

Observed Event Sequence:-

Vis.	Time(sec)	Last Device	At Device	Type
	0.000	--	PC0	ICMP
	0.000	--	PC0	ARP
	0.001	PC0	Switch0	ARP
	0.002	Switch0	PC1	ARP
	0.002	Switch0	PC2	ARP
	0.003	PC1	Switch0	ARP
	0.004	Switch0	PC0	ARP
	0.004	--	PC0	ICMP
	0.005	PC0	Switch0	ICMP
	0.006	Switch0	PC1	ICMP
	0.007	PC1	Switch0	ICMP
	0.008	Switch0	PC0	ICMP
	1.012	--	PC0	ICMP
	1.013	PC0	Switch0	ICMP
	1.014	Switch0	PC1	ICMP
	1.015	PC1	Switch0	ICMP
	1.016	Switch0	PC0	ICMP
	2.018	--	PC0	ICMP
	2.019	PC0	Switch0	ICMP
	2.020	Switch0	PC1	ICMP
	2.021	PC1	Switch0	ICMP

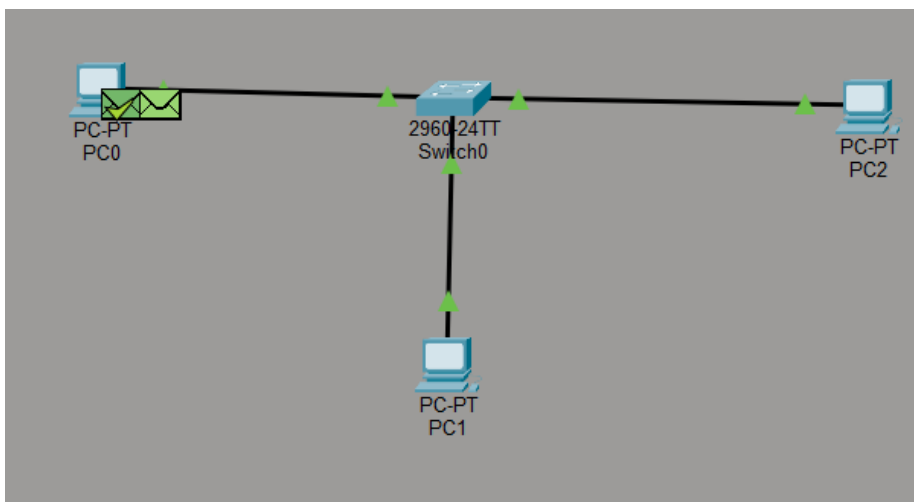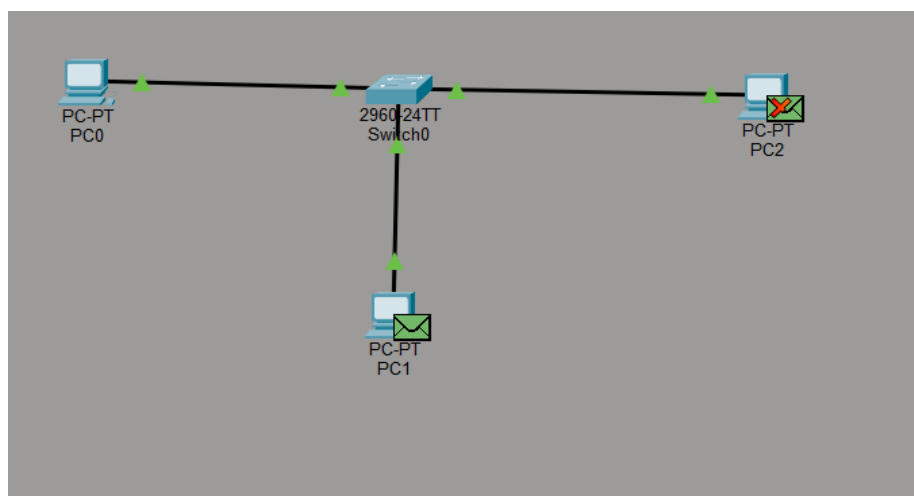

Task 3: Second Ping Observation

Without clearing the ARP cache, a second ping was issued immediately: ping 192.168.20.2. The simulation was re-run from the beginning of the event list for the new set of packets.

```
C:\>ping 192.168.20.2



Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time=4ms TTL=128
Reply from 192.168.20.2: bytes=32 time=4ms TTL=128
Reply from 192.168.20.2: bytes=32 time=4ms TTL=128
Reply from 192.168.20.2: bytes=32 time=4ms TTL=128

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 4ms, Maximum = 4ms, Average = 4ms
```

Observed Event Sequence:-

Simulation Panel				
Event List				
Vis.	Time(sec)	Last Device	At Device	Type
	0.000	--	PC0	ICMP
	0.001	PC0	Switch0	ICMP
	0.002	Switch0	PC1	ICMP
	0.003	PC1	Switch0	ICMP
	0.004	Switch0	PC0	ICMP
	1.006	--	PC0	ICMP
	1.007	PC0	Switch0	ICMP
	1.008	Switch0	PC1	ICMP
	1.009	PC1	Switch0	ICMP
	1.010	Switch0	PC0	ICMP
	2.014	--	PC0	ICMP
	2.015	PC0	Switch0	ICMP
	2.016	Switch0	PC1	ICMP
	2.017	PC1	Switch0	ICMP
	2.018	Switch0	PC0	ICMP
	3.021	--	PC0	ICMP
	3.022	PC0	Switch0	ICMP
	3.023	Switch0	PC1	ICMP
	3.024	PC1	Switch0	ICMP
	3.025	Switch0	PC0	ICMP

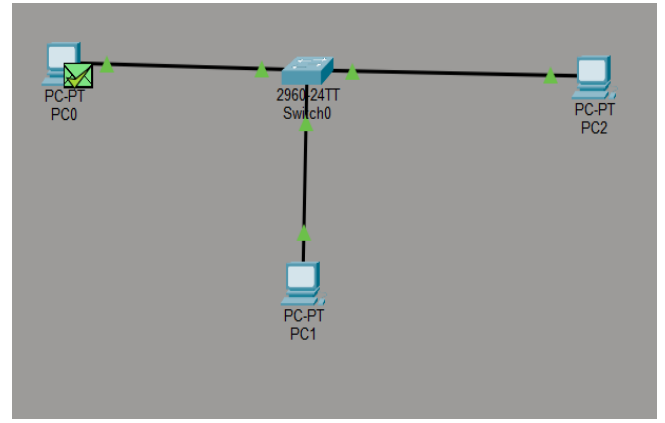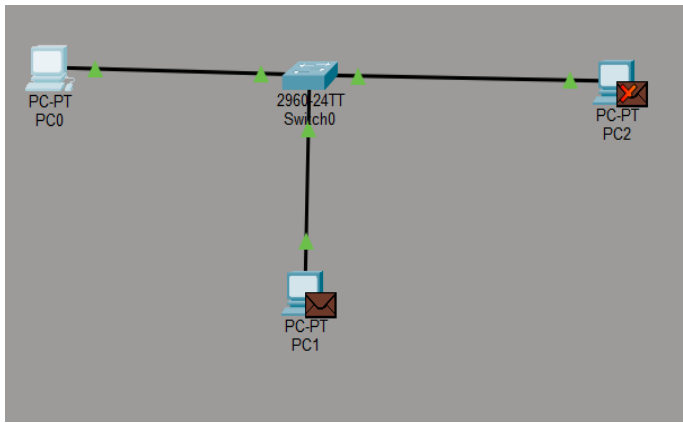

Task 4: MAC Table Check

```
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type    Ports
----    -
1        0001.436a.3920    DYNAMIC Fa0/1
1        0001.c770.49d1    DYNAMIC Fa0/2
Switch#
```

- First Ping vs. Second Ping – Comparison

Feature	First Ping	Second Ping
ARP Used	Yes	No
Speed	Slow	Fast
Packets Count	More	Less
Reason	MAC unknown	MAC cached