


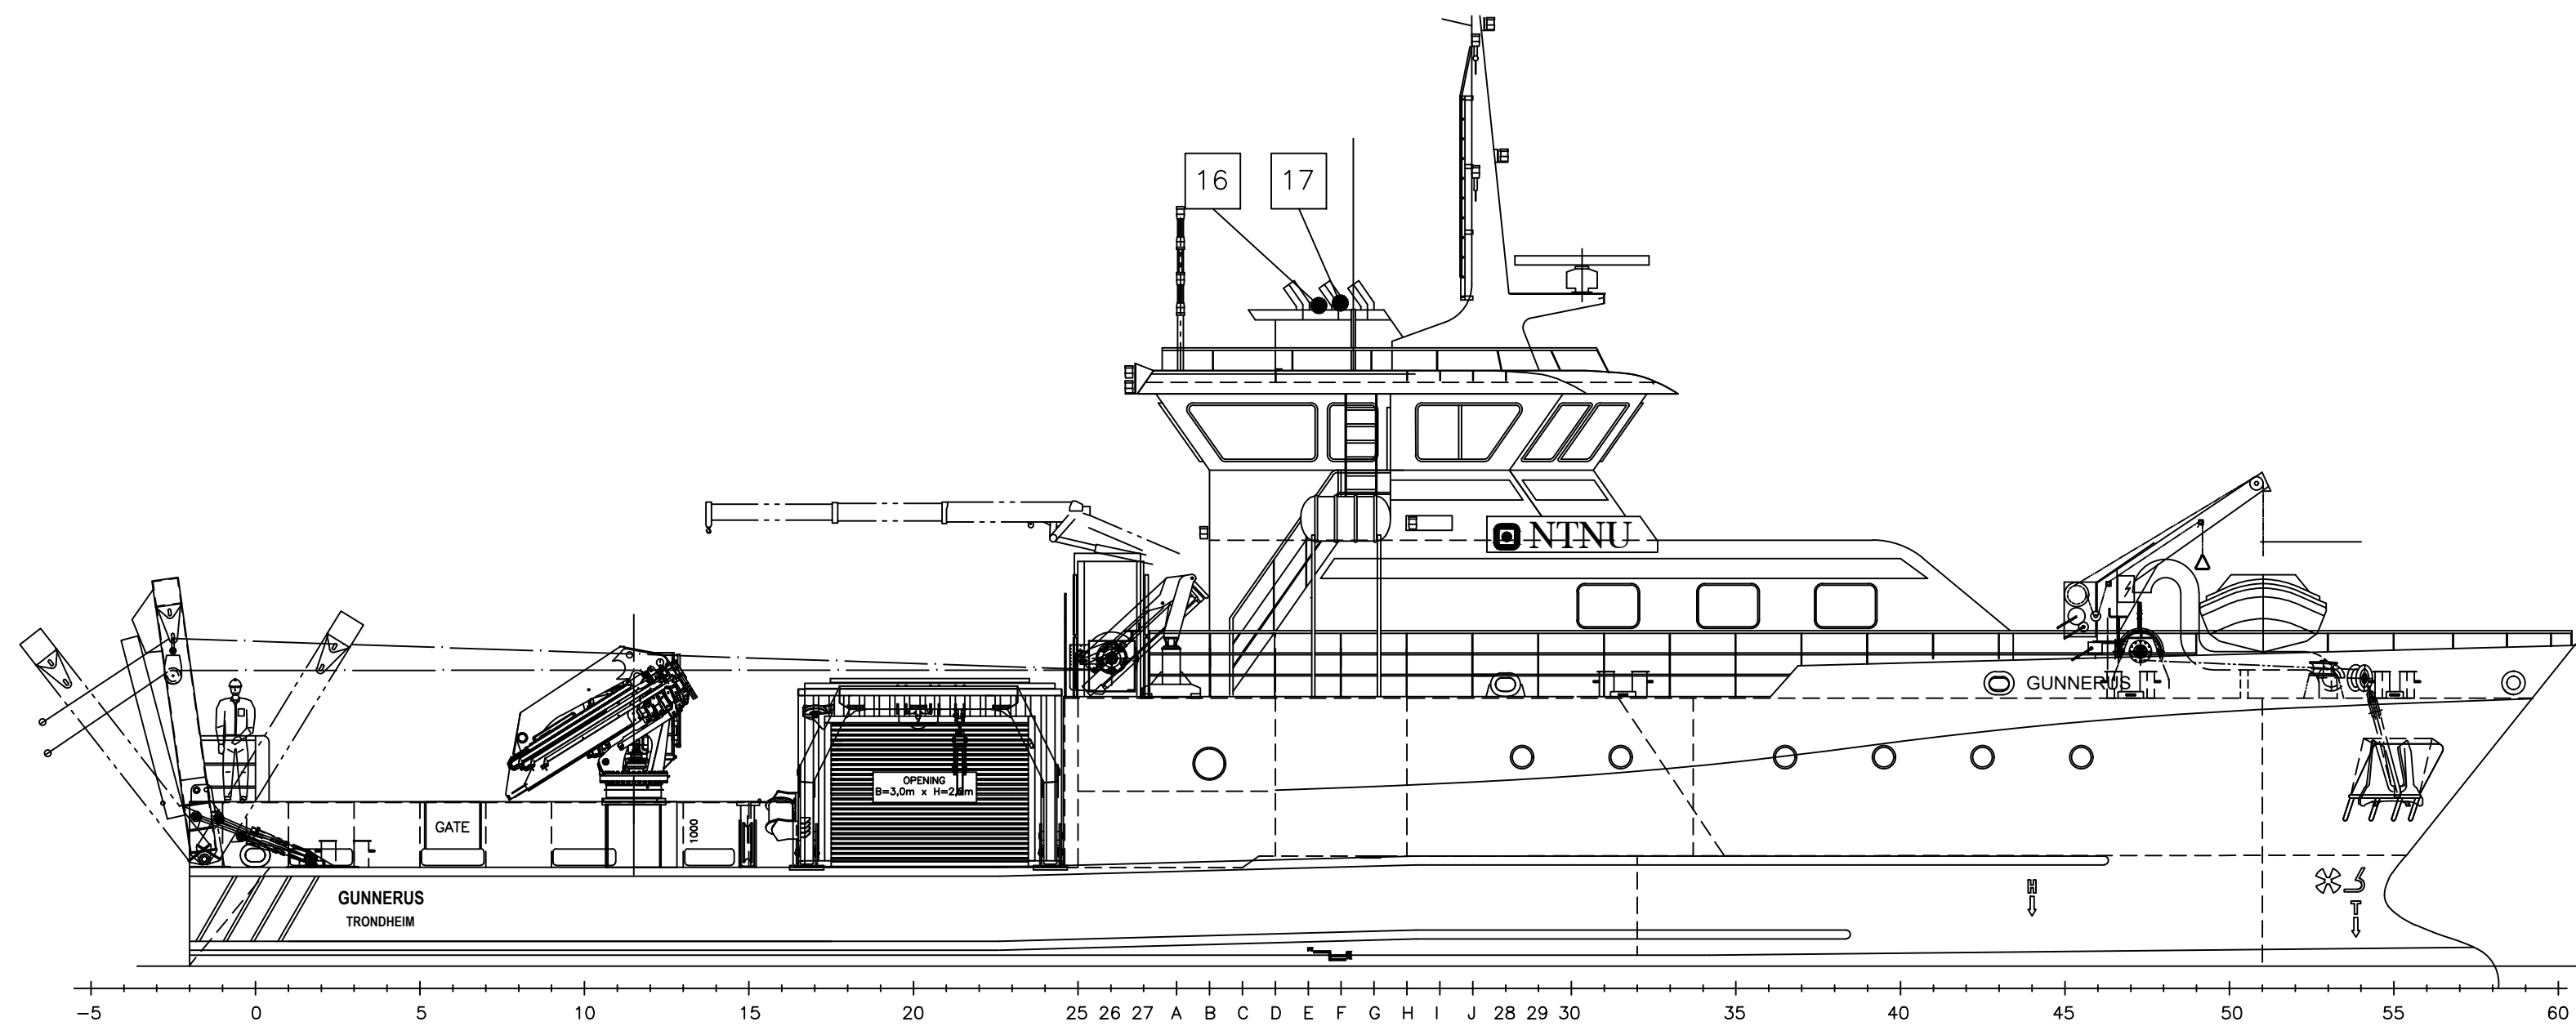


.BRIDGE DECK.


A-DECK.

1-DECK.


PROFILE

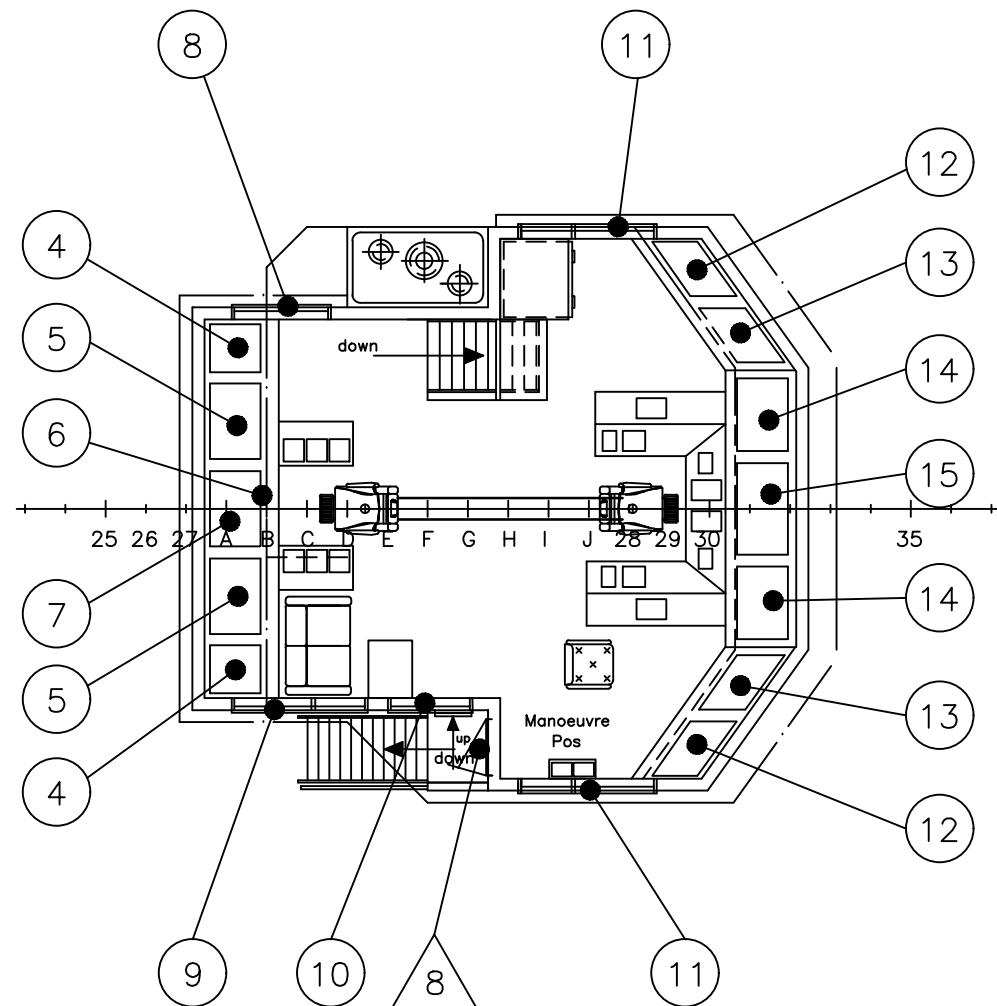


WHEEL HOUSE.

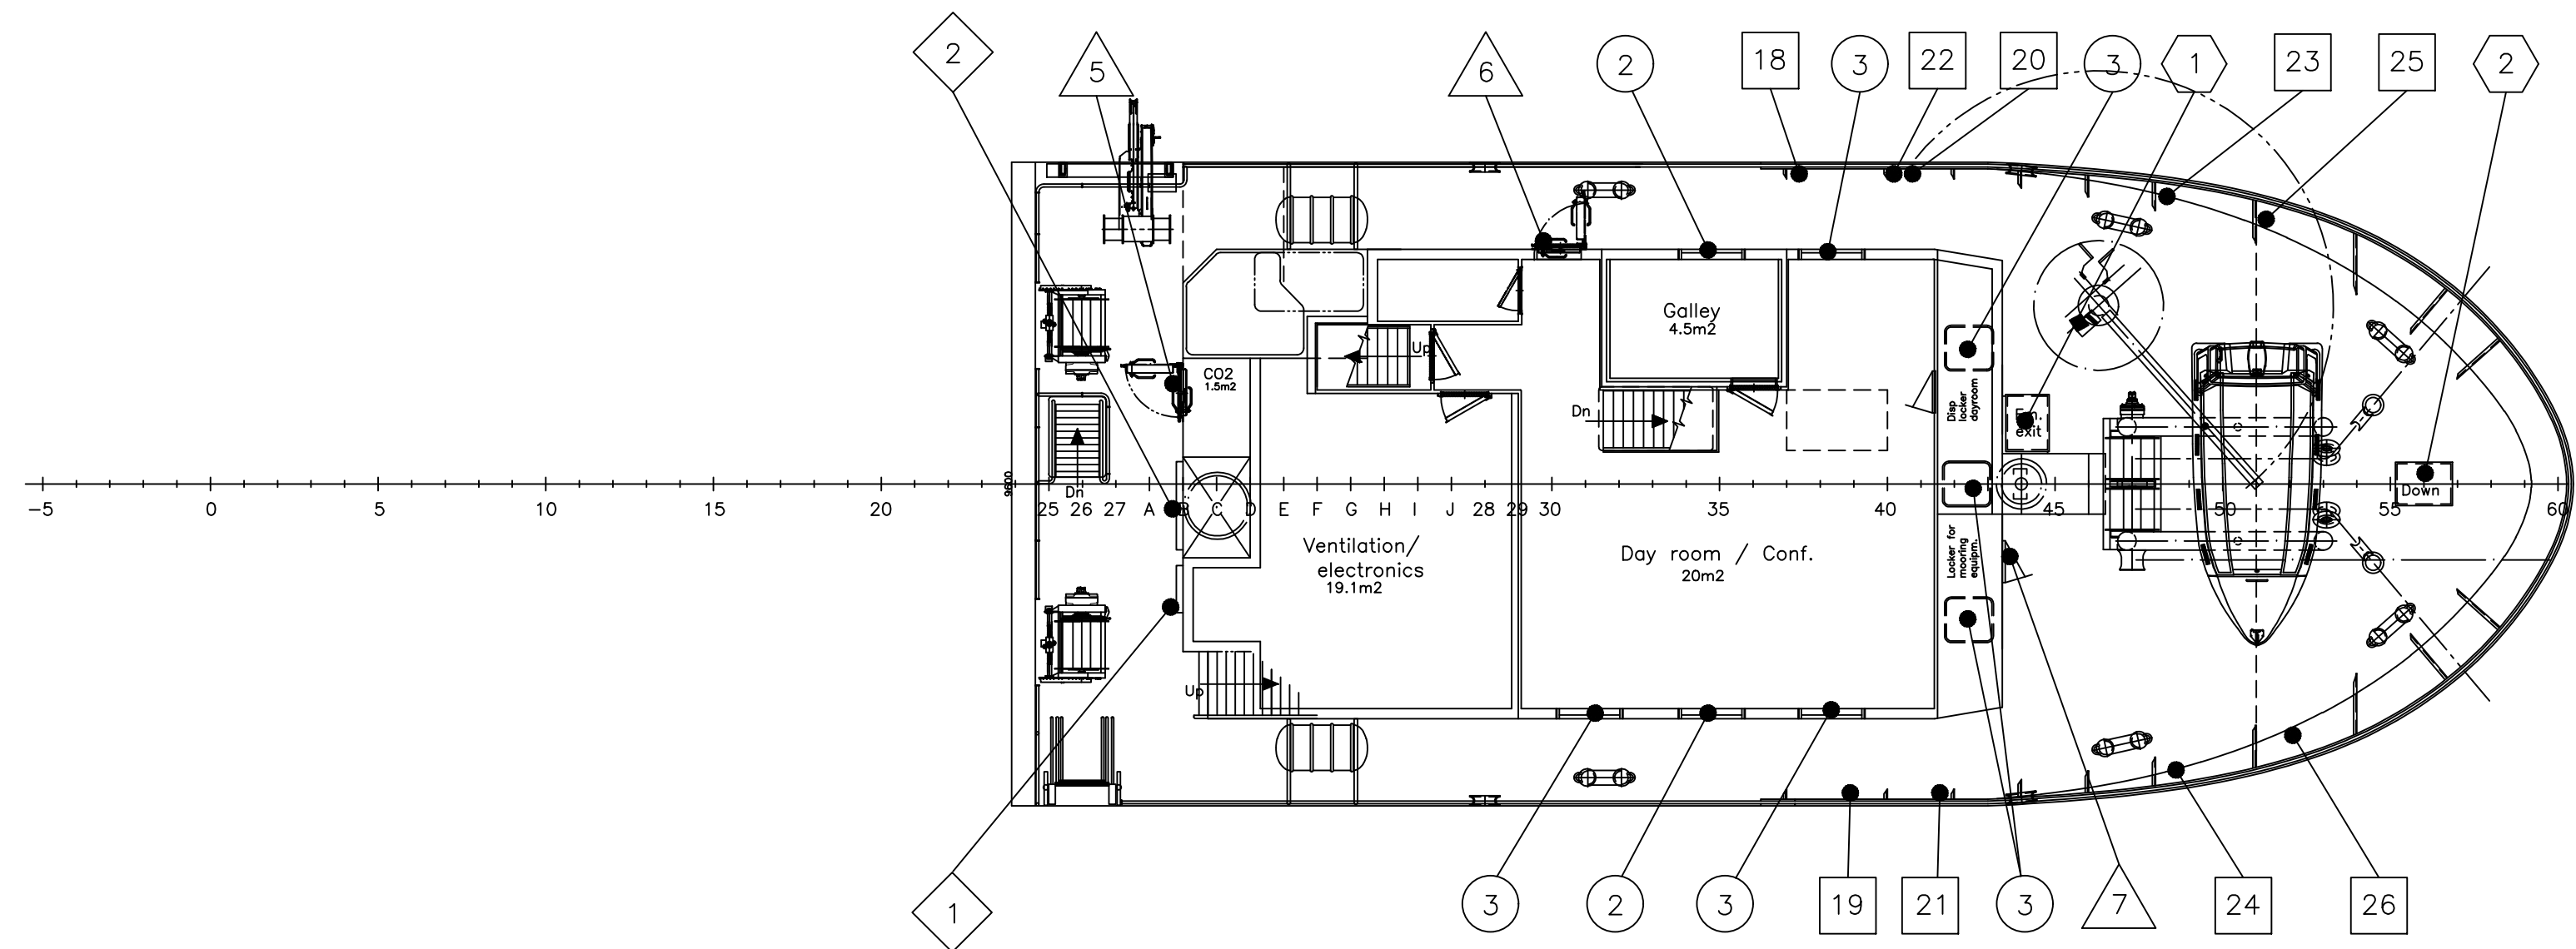


A-DECK

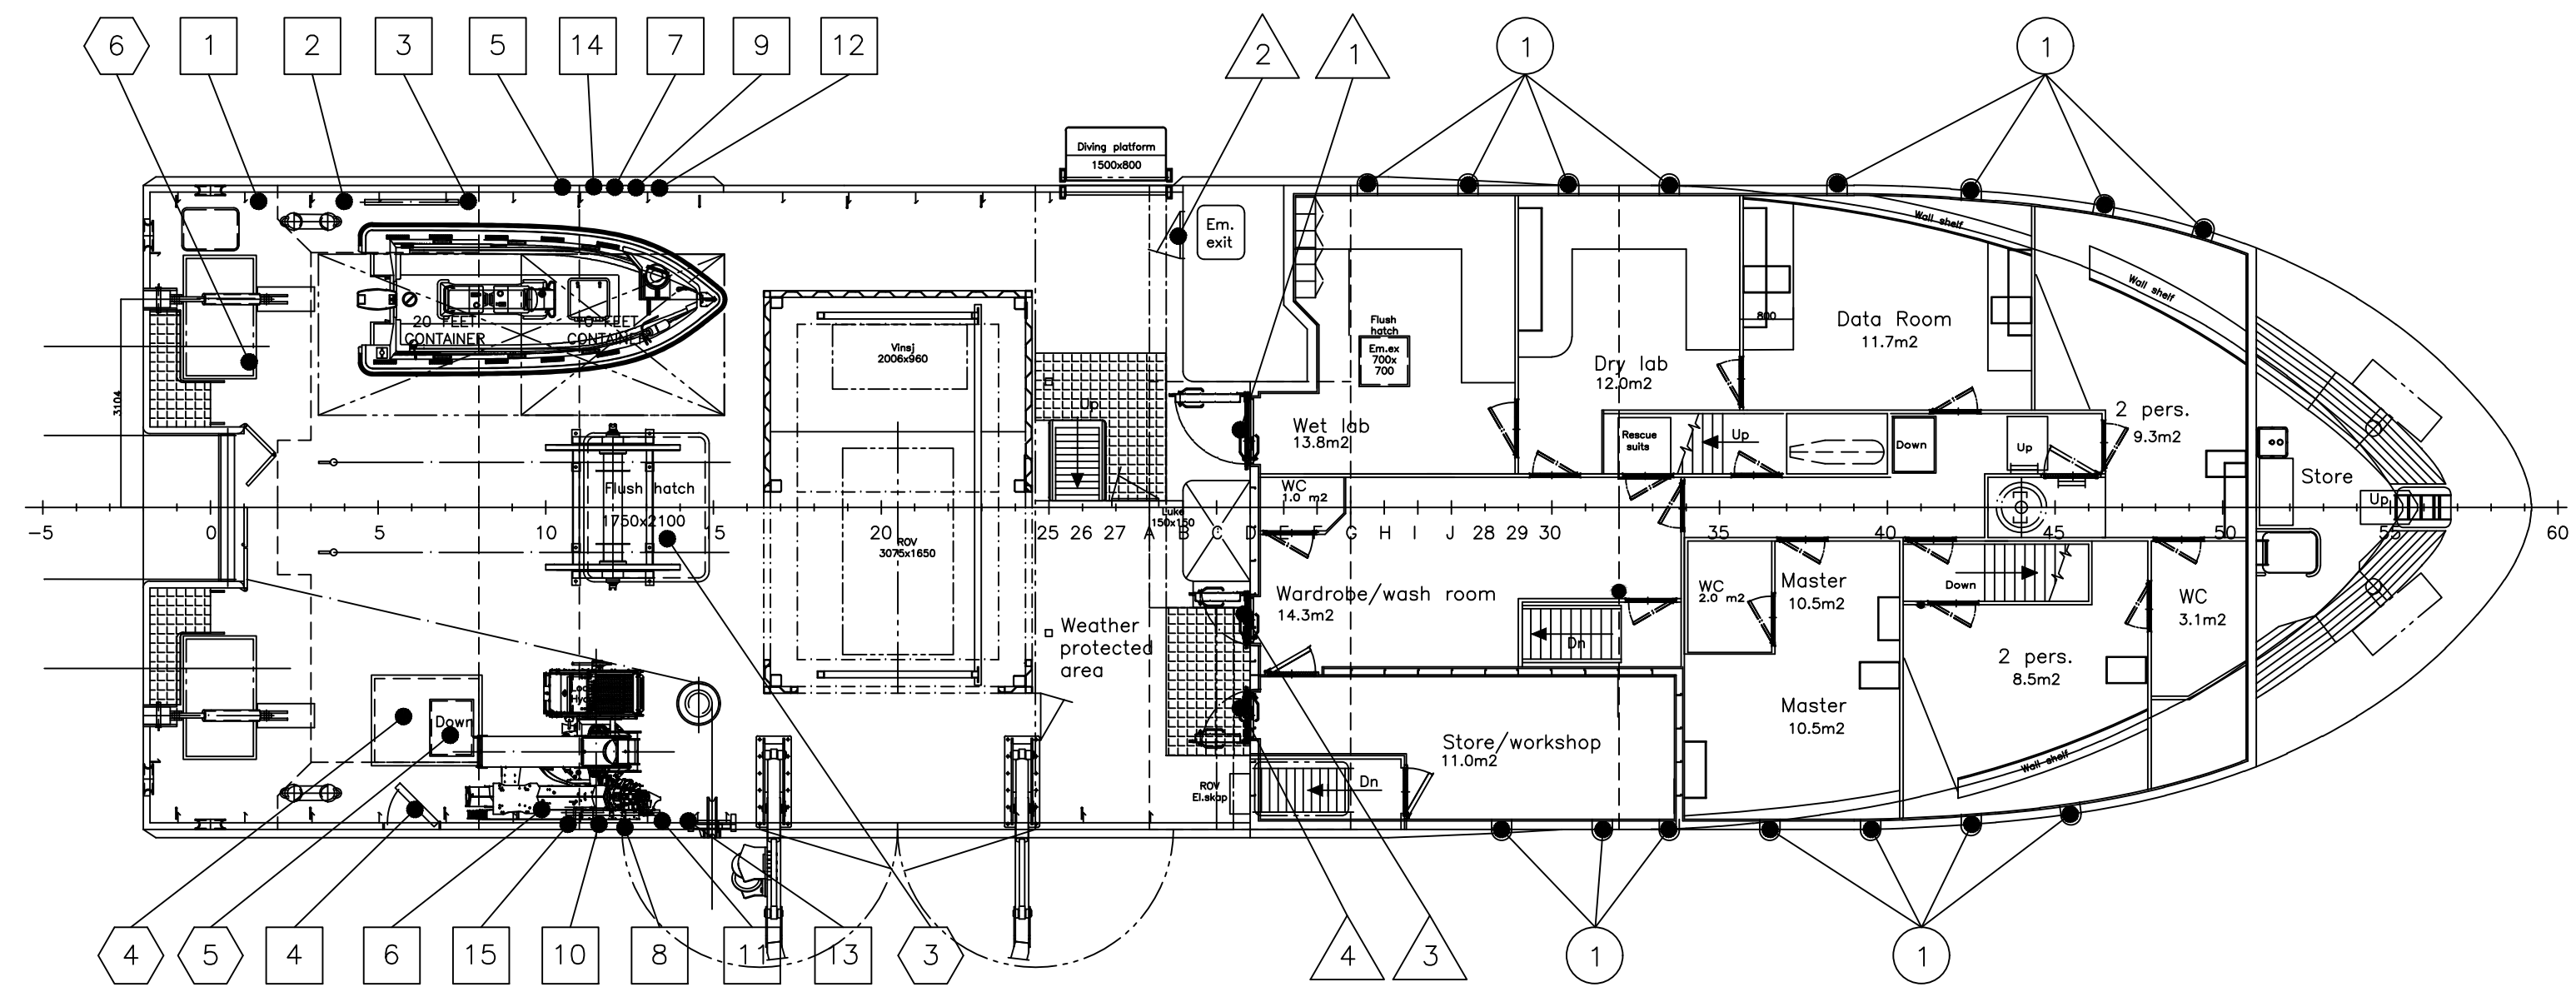


1-DECK

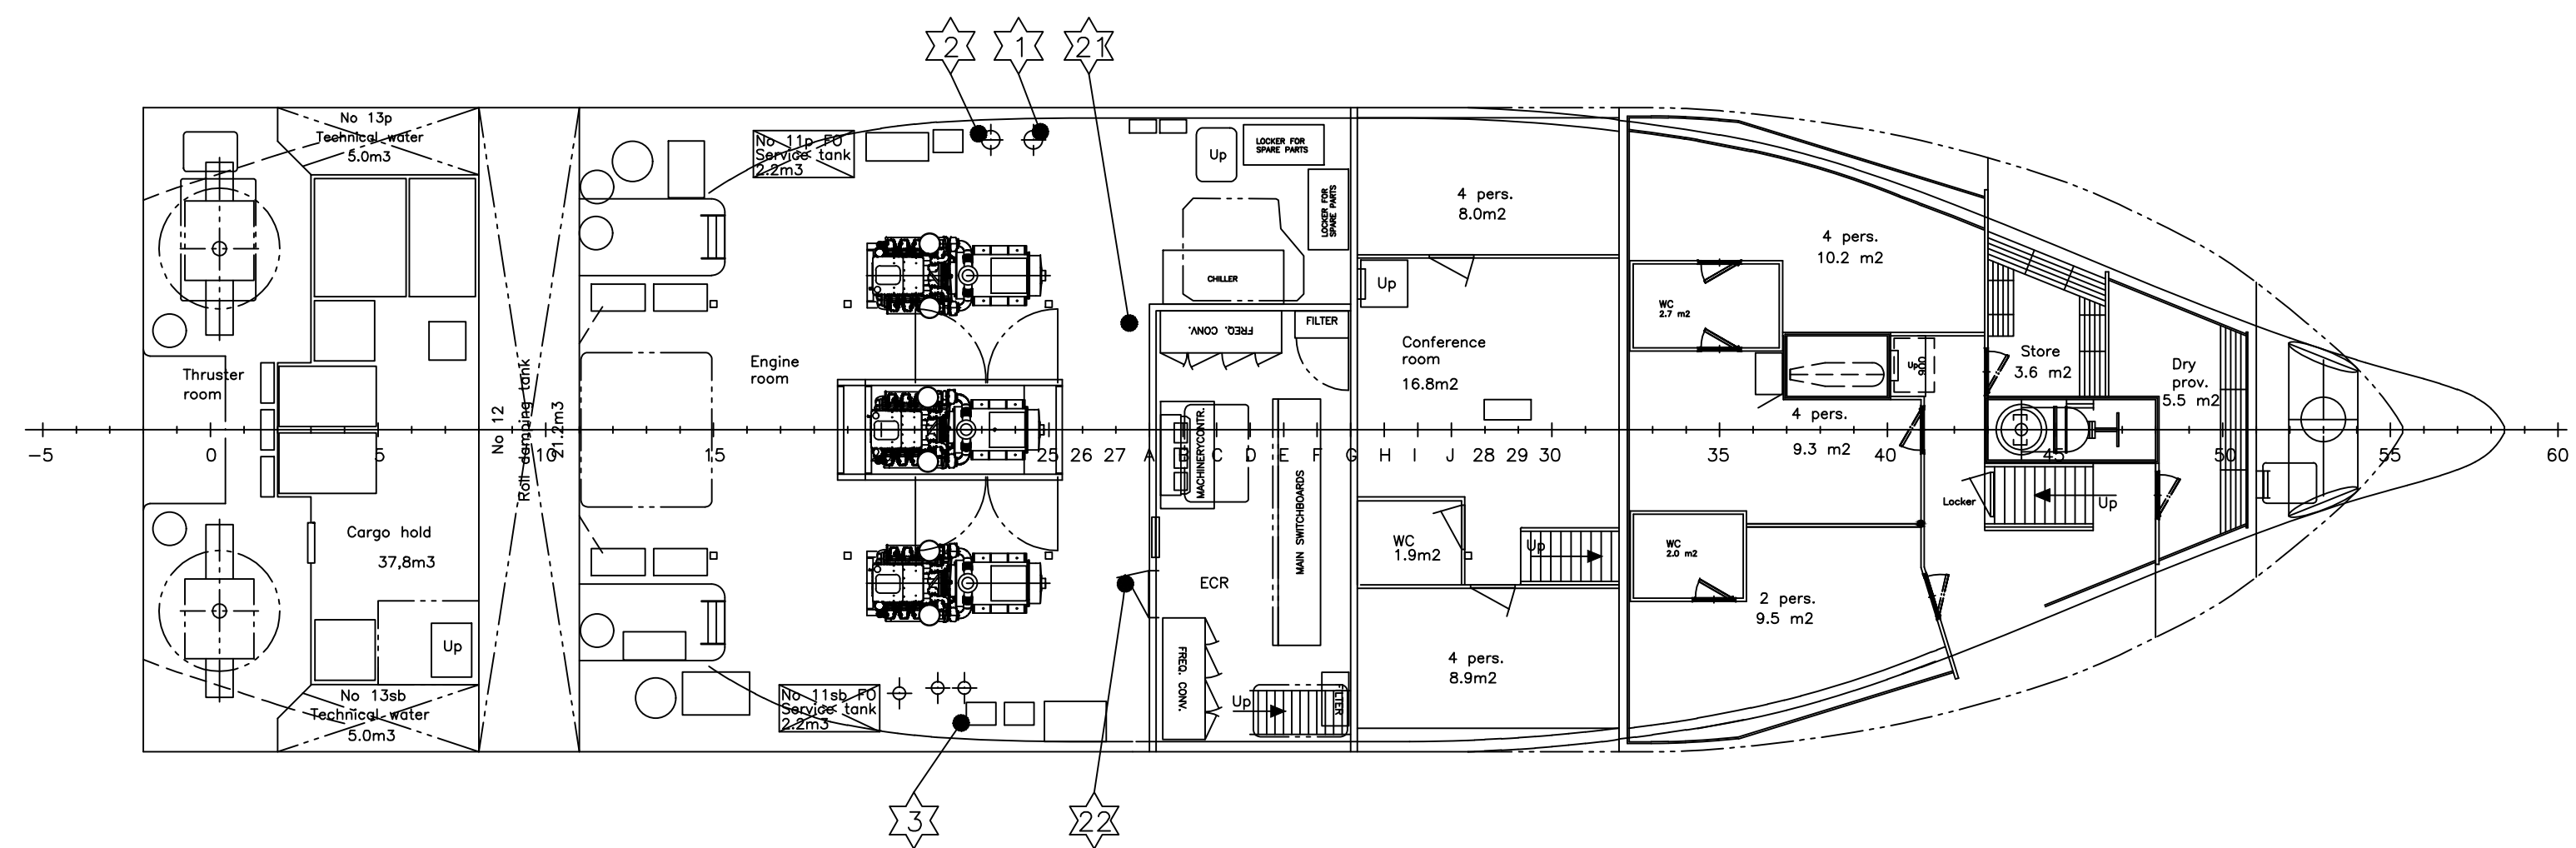

BELOW 1-DECK.

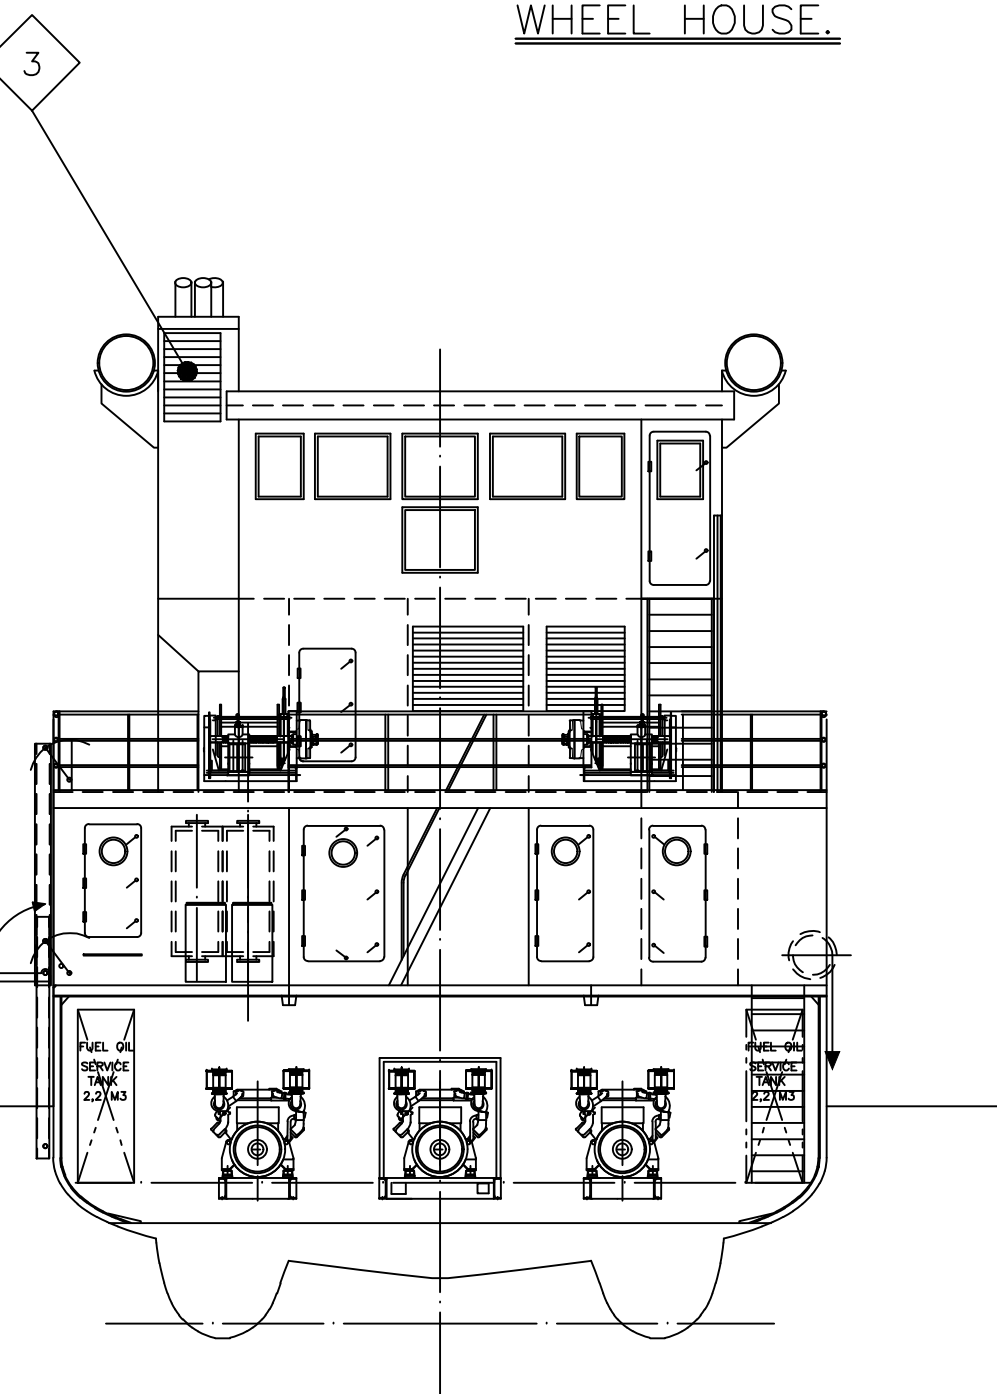

SECTION FR.17

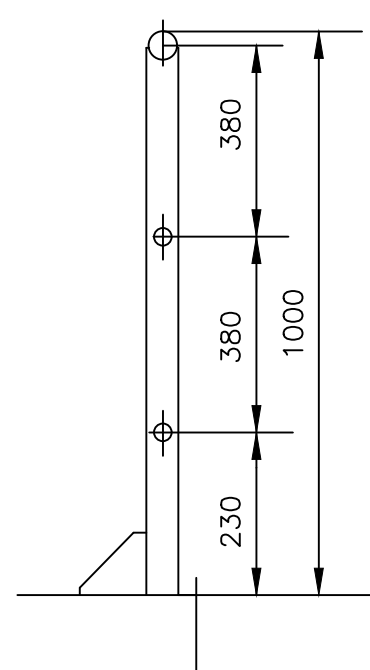

TYPICAL SECTION
GUARDRAILS ON DECK.

AIR-PIPES □

POS.	FROM	TO	HEIGHT ABOVE DECK	MATR.	DIMENSION ABOVE DECK	TYPE CLOSING
1	ST. GEAR ROOM	1-DECK	760	ST.	88,9x7,1	TANK VENT CHECK VALVE
2	CARGO HOLD	1-DECK	760	ST.	88,9x7,1	TANK VENT CHECK VALVE
3	TANK NO. 13 p	1-DECK	760	ST.	76,1x6,3	TANK VENT CHECK VALVE
4	TANK NO. 13 sb	1-DECK	760	ST.	76,1x6,3	TANK VENT CHECK VALVE
5	TANK NO. 12 p	1-DECK	760	ST.	76,1x6,3	TANK VENT CHECK VALVE
6	TANK NO. 12 sb	1-DECK	760	ST.	76,1x6,3	TANK VENT CHECK VALVE
7	SEACHEST PORT	1-DECK	760	ST.	88,9x7,1	SWAN NECK
8	SEACHEST SB	1-DECK	760	ST.	88,9x7,1	SWAN NECK
9	TANK NO. 10	1-DECK	760	ST.	88,9x7,1	TANK VENT CHECK VALVE
10	TANK NO. 9	1-DECK	760	ST.	60,3x6,3	TANK VENT CHECK VALVE
11	TANK NO. 8	1-DECK	760	ST.	60,3x6,3	TANK VENT CHECK VALVE
12	TANK NO. 11 p	1-DECK	760	ST.	60,3x6,3	TANK VENT CHECK VALVE
13	TANK NO. 11 sb	1-DECK	760	ST.	60,3x6,3	TANK VENT CHECK VALVE
14	TANK NO. 6 p	1-DECK	760	ST.	76,1x6,3	TANK VENT CHECK VALVE
15	TANK NO. 6 sb	1-DECK	760	ST.	76,1x6,3	TANK VENT CHECK VALVE
16	TANK NO. 7 p	TOP FUNNEL	5200	ST.	88,9x7,1	SWAN NECK
17	TANK NO. 7 sb	TOP FUNNEL	5200	ST.	88,9x7,1	SWAN NECK
18	TANK NO. 5	A-DECK	450	ST.	76,1x6,3	TANK VENT CHECK VALVE
19	TANK NO. 4	A-DECK	450	ST.	76,1x6,3	TANK VENT CHECK VALVE
20	TANK NO. 3 p	A-DECK	450	ST.	76,1x6,3	TANK VENT CHECK VALVE
21	TANK NO. 3 sb	A-DECK	450	ST.	76,1x6,3	TANK VENT CHECK VALVE
22	CEN. B. TRUNK	A-DECK	450	ST.	88,9x7,1	TANK VENT CHECK VALVE
23	TANK NO. 2 p	A-DECK	450	ST.	76,1x6,3	TANK VENT CHECK VALVE
24	TANK NO. 2 sb	A-DECK	450	ST.	76,1x6,3	TANK VENT CHECK VALVE
25	TANK NO. 1	A-DECK	450	ST.	76,1x6,3	TANK VENT CHECK VALVE
26	FOREPEAK	A-DECK	450	ST.	88,9x7,1	TANK VENT CHECK VALVE

VENTILATORS ◇

POS.	OFF.	FROM	TO	HEIGHT ABOVE DECK.	DIM	TYPE CLOSING
1	1	VENT. ROOM	A-DECK	1000	1000x1000	WITH HATCH.
2	1	ENG. FANROOM	A-DECK	1000	1400x1000	WITH HATCH
3	1	ENG. ROOM	TOP FUNNEL	4500	700x1000	WITH HATCH.
4						
5						
6						

FREELING PORTS

DECK	LENGHT	HEIGHT	NUMBER EACH SIDE	POSITION	AREA EACH OPENING	TOTAL AREA EACH SIDE
1-DECK	950 mm	230 mm	5	PORT SIDE ON RAIL	0,22 m2	1,08 m2
1-DECK	950 mm	230 mm	5	STARB. SIDE ON RAIL	0,22 m2	1,08 m2

WINDOWS AND SCUTTLES ○

POS.	OFF.	LOCATION	DIMENSION	GLAS THICKNESS	HEIGHT ABOVE A-DECK	DEADLIGHT TOGGLE	HING.	COAM MATR.	TYPE	TOGGLE	HING.
1	14	1-DECK.	ø300	10	1500	2	1	BR.	FIXED		
2	2	A-DECK.	900x630	12	1400			AL.	FIXED	2	1
3	6	A-DECK.	900x630	12	1400			AL.	FIXED		
4	1	BRIDGE		15	3500			AL.	FIXED		
5	1	BRIDGE		15	3500			AL.	FIXED		
6	1	BRIDGE		15	2700			AL.	FIXED		
7	1	BRIDGE		15	3500			AL.	FIXED	2	1
8	1	BRIDGE		15	3500			AL.	FIXED		
9	1	BRIDGE		15	3500			AL.	FIXED		
10	1	BRIDGE		15	3500			AL.	FIXED		
11	2	BRIDGE		15	3500			AL.	SLIDE		
12	2	BRIDGE		15	3500			AL.	FIXED		
13	1	BRIDGE		15	3500			AL.	FIXED		
14	2	BRIDGE		15	3500			AL.	FIXED		
15	1	BRIDGE		15	3500			AL.	FIXED		

DOORS △

POS.	DECK	SILL HEIGHT	NOM. DIM.	TYPE	REMARKS	TIGHTENING HANDLES	HINGE
1	1. DECK	380	980X1680	WEATHERTIGHT	WITH WINDOW	6	2
2	1. DECK	600	680X1480	WEATHERTIGHT		6	2
3	1. DECK	380	680X1680	WEATHERTIGHT	WITH WINDOW	6	2
4	1. DECK	380	680X1680	WEATHERTIGHT	WITH WINDOW	6	2
5	A-DECK	380	680X1680	WEATHERTIGHT		6	2
6	A-DECK	380	680X1680	WEATHERTIGHT		6	2
7	A-DECK	75	800x800	SPRAYTIGHT.		2	2
8	BRIDGE-DECK	150	680X1880	SPRAYTIGHT.	WITH WINDOW	2	2

HATCHES ○

POS.	OFF.	HATCH COAMING			CLOSING				REMARKS	
		DIM. OPENING	COAM THICKN.	HEIGHT ABOVE DECK.	HATCH THICKN.	PACKING	TYPE CLOSING			
							TOGGLE	BOLTS		HINGE
1	1	600x800	11	600	8	40x25	3		2	
2	1	800x600	11	600	8	40x25	3		2	
3	1	1950x2300	11	FLUSH	8	40x25		18	2	
4	1	1470x1200	11	200	8	40x25		12	2	
5	1	600x800	11	600	8	40x25	3		2	
6	1	600x800	11	600	8	40x25	3		2	

SEA OUTLET ☆

POS.	OUTLETS FROM	POSITION OF VALVE OPERATING	PIPES OUTLET DIMENSION	MATR OF	REMARKS
1	BALLAST PUMP	☆	ø88,9x8,0	ST.	OUTLET 3500 ABOVE BL.
2	BILGE PUMP	☆	ø88,9x8,0	ST.	OUTLET 3500 ABOVE BL.
3	SEWAGE PUMP	☆	ø88,9x8,0	ST.	OUTLET 3500 ABOVE BL.

SEA INLET ☆

POS.	INLETS FROM	POSITION OF VALVE OPERATING	PIPES INLET DIMENSION	MATR OF	REMARKS
21	CROSSOVER	☆	ø168,3x10,0	ST.	INLET IN ENGINE ROOM
22	CROSSOVER	☆	ø168,3x10,0	ST.	INLET IN ENGINE ROOM

MAIN PARTICULARS

LENGTH OVER ALL	36.25	[m]
LENGTH BETV. PERP.	33.90	[m]
BREADTH MOULDED	9.60	[m]
DEPTH TO 1-DECK	4.287	[m]
DEPTH TO A-DECK	6.687	[m]
DRAUGHT NORM. OPERATIVE	2.50	[m]
DRAUGHT MAX. LOADED	2.787	[m]
SCANTLING DRAUGHT	2.30	[m]
GROSS TONNAGE	430	[GT]
FRAME DISTANCE	500	[mm]
CLASS	Sjæfarfsdirektoratet (NMN)	
ACCORDING TO	DNV-1111 (CE 82)	
DEADWEIGHT AT d+2.786	169	[t]
TRADING LIMIT	SMALL COASTAL TRADE	
BUILT YEAR	2005	