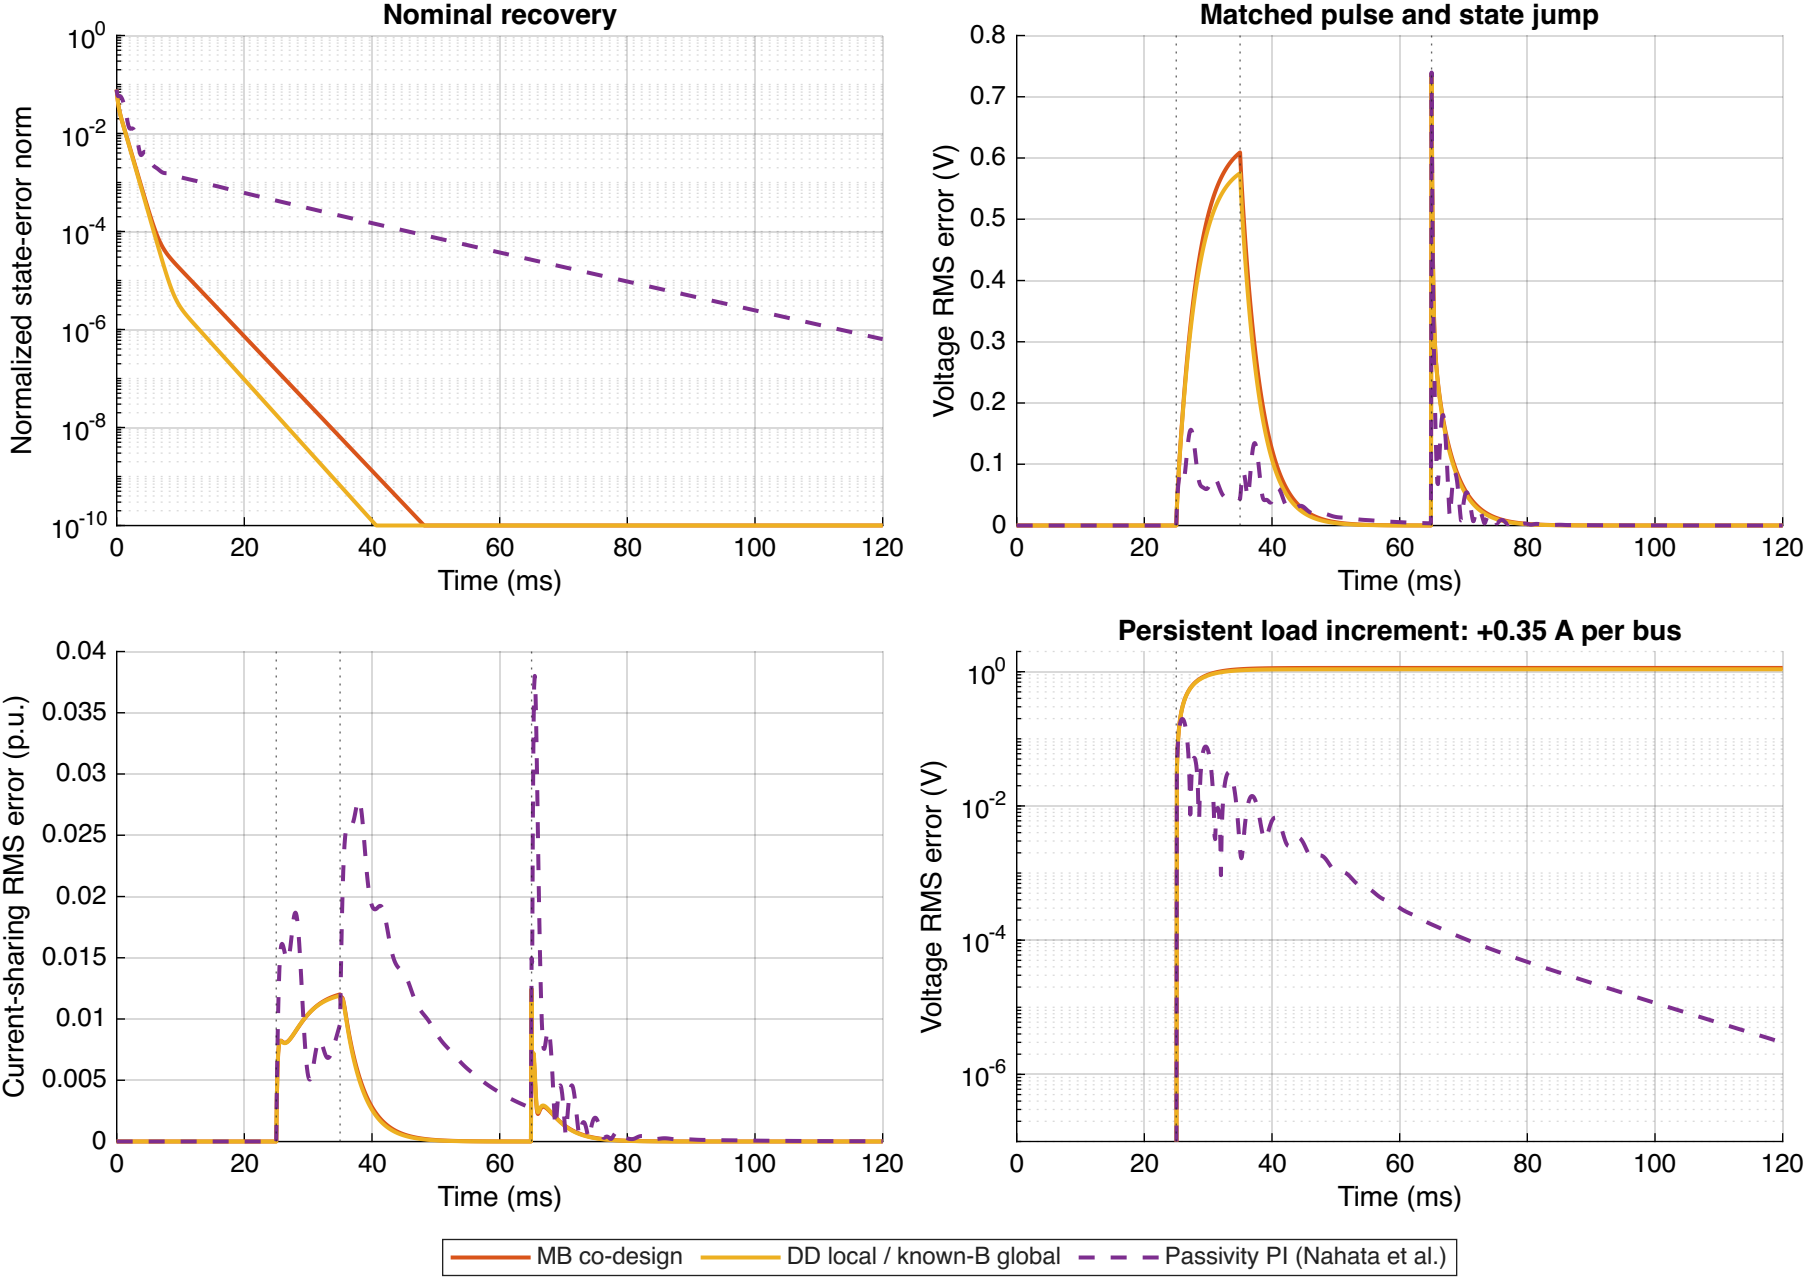

Nominal recovery
Normalized state-error norm
Time (ms)
Matched pulse and state jump
Voltage RMS error (V)
Time (ms)
Current-sharing RMS error (p.u.)
Time (ms)
Persistent load increment: +0.35 A per bus
Voltage RMS error (V)
Time (ms)
MB co-design
DD local / known-B global
Passivity PI (Nahata et al.)