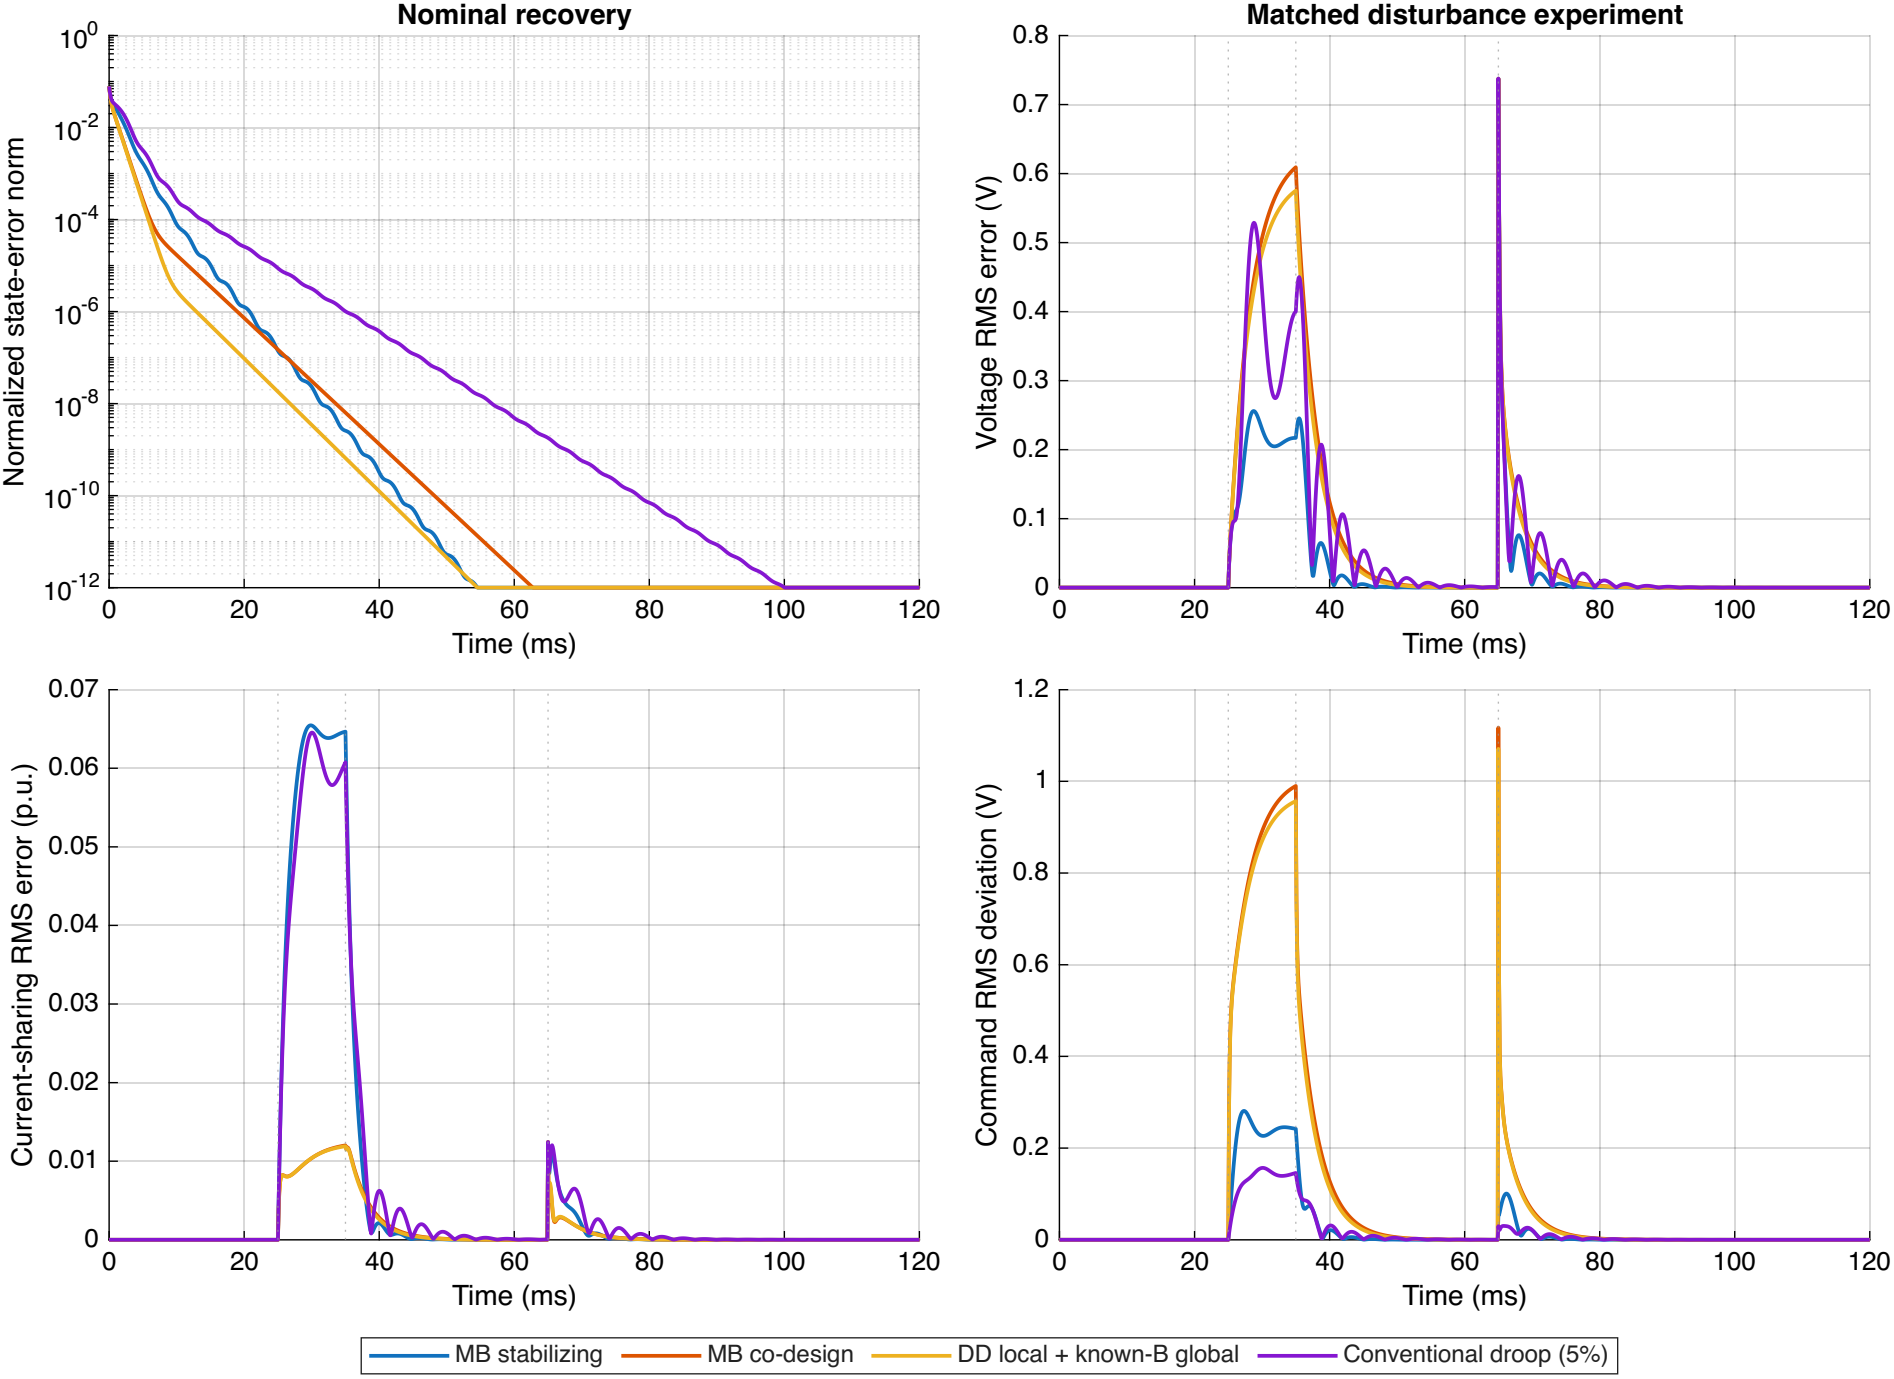

Nominal recovery
Normalized state-error norm
Time (ms)
Matched disturbance experiment
Voltage RMS error (V)
Time (ms)
Current-sharing RMS error (p.u.)
Time (ms)
Command RMS deviation (V)
Time (ms)
MB stabilizing
MB co-design
DD local + known-B global
Conventional droop (5%)