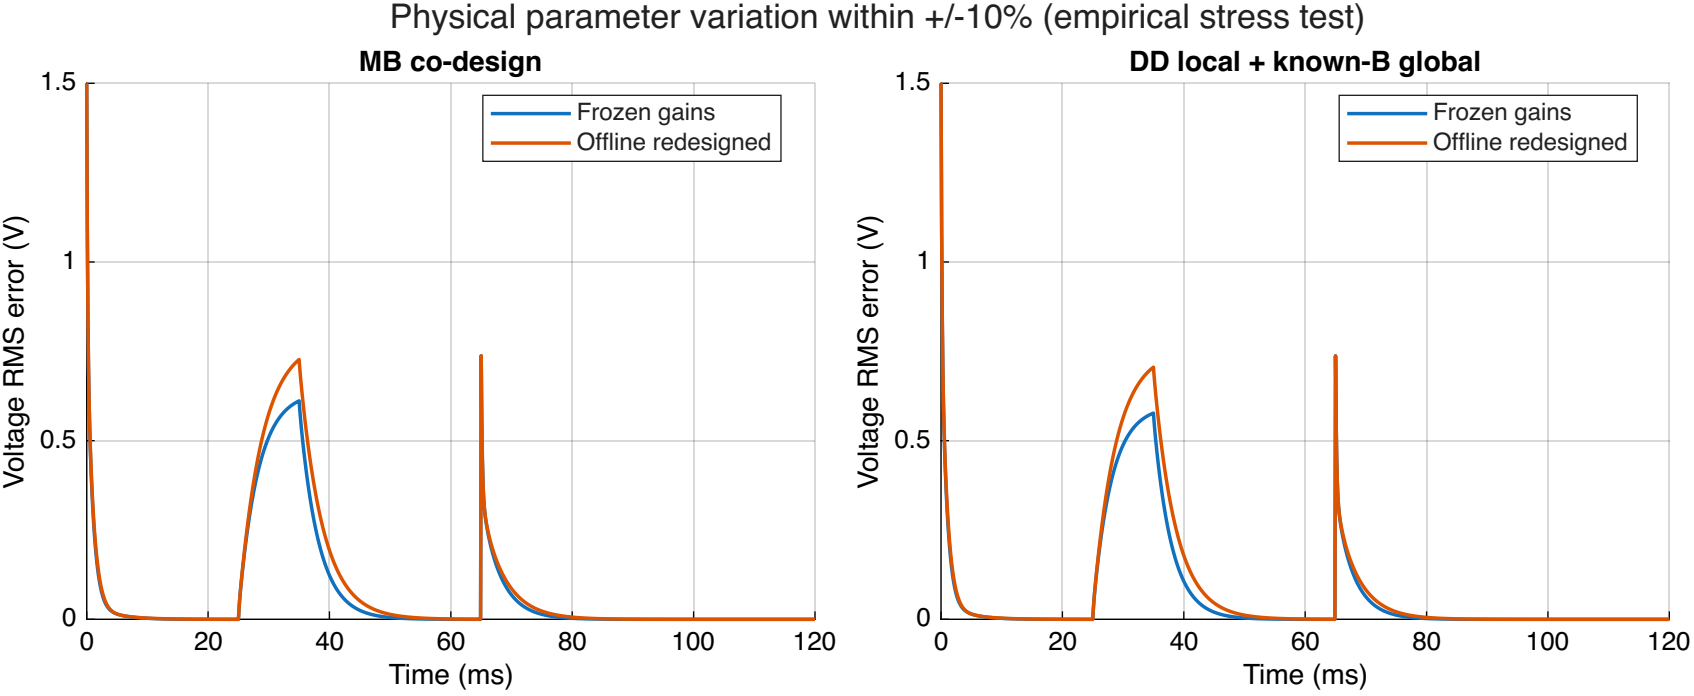
Physical parameter variation within +/-10% (empirical stress test)
MB co-design
DD local + known-B global
Frozen gains
Offline redesigned
Voltage RMS error (V)
Time (ms)
0
0.5
1
1.5
0
20
40
60
80
100
120