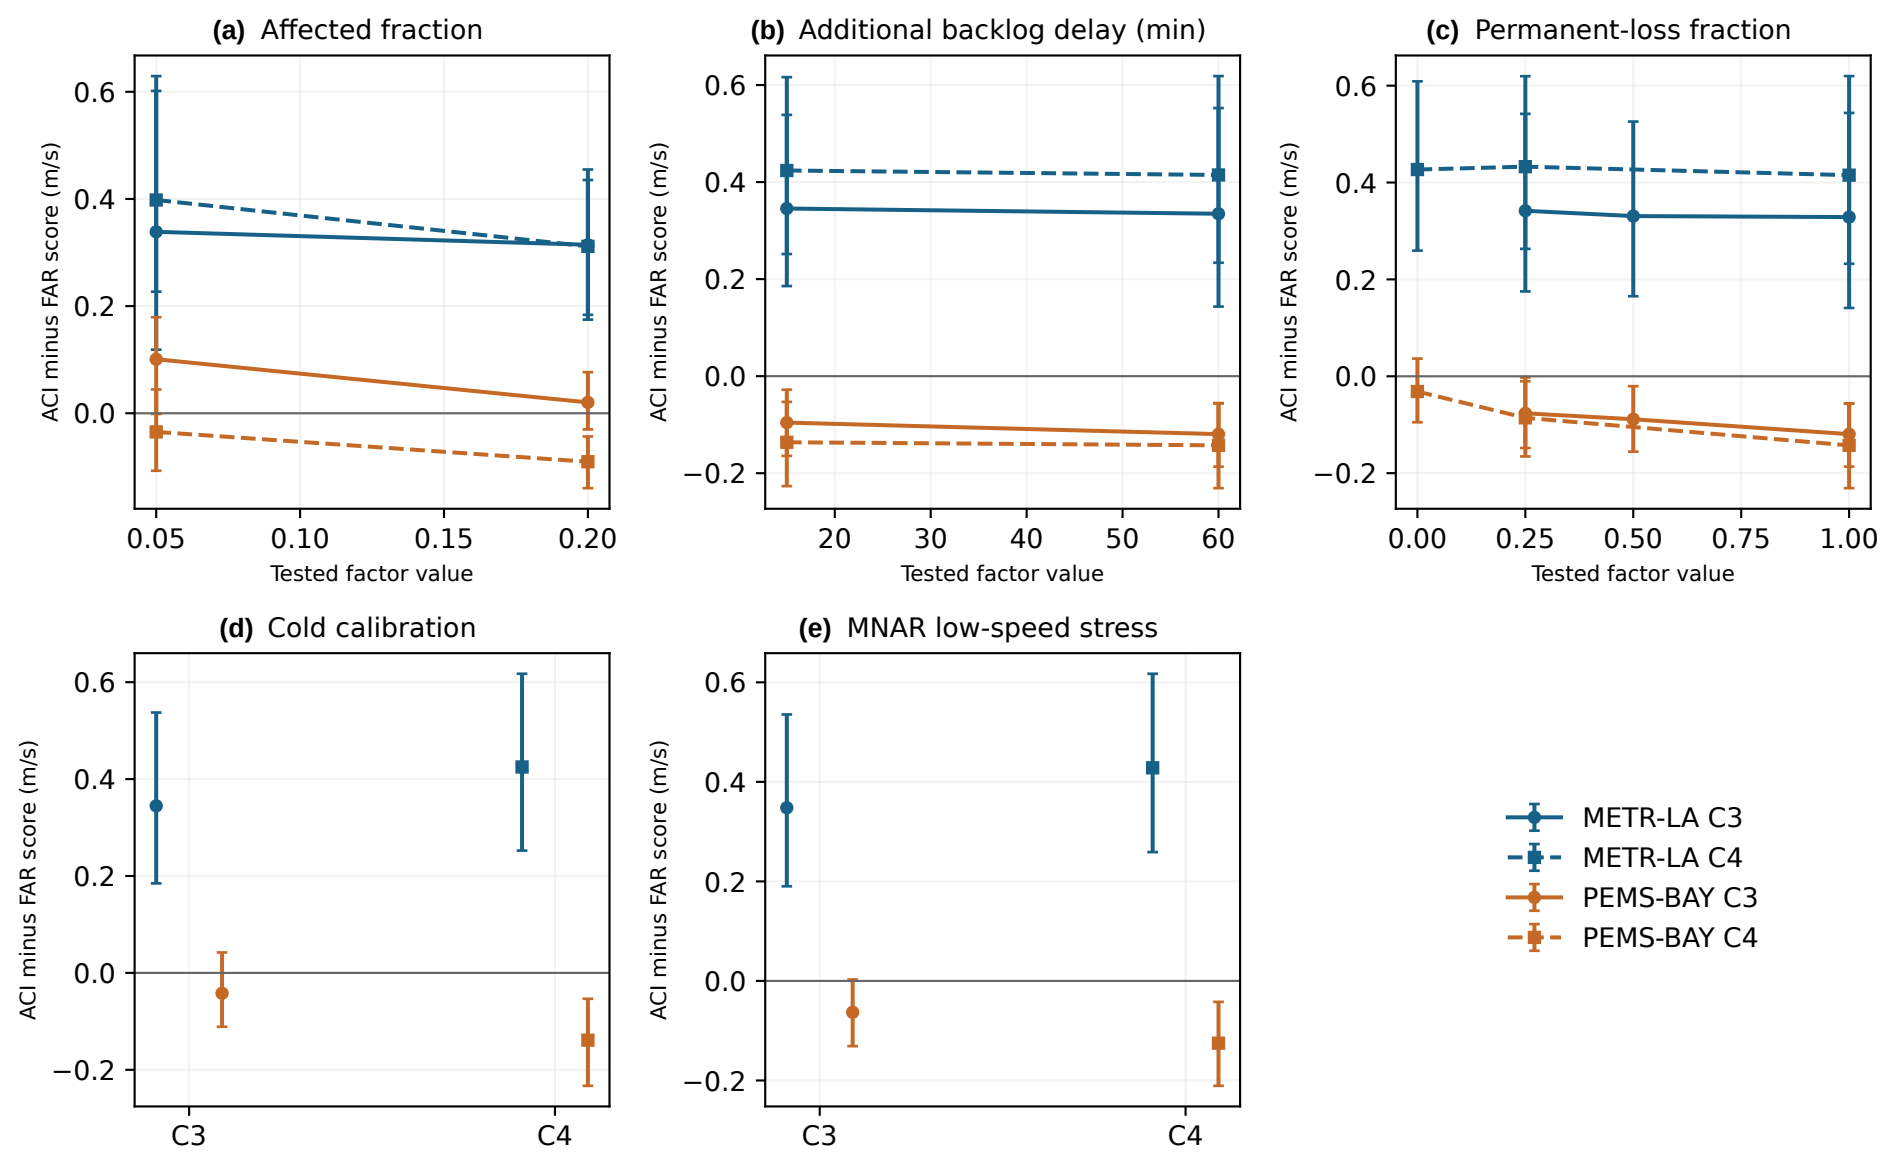
(a) Affected fraction
(b) Additional backlog delay (min)
(c) Permanent-loss fraction
(d) Cold calibration
(e) MNAR low-speed stress
ACI minus FAR score (m/s)
Tested factor value
C3
C4
METR-LA C3
METR-LA C4
PEMS-BAY C3
PEMS-BAY C4