Track R4 — drive, side guidance and wider stance

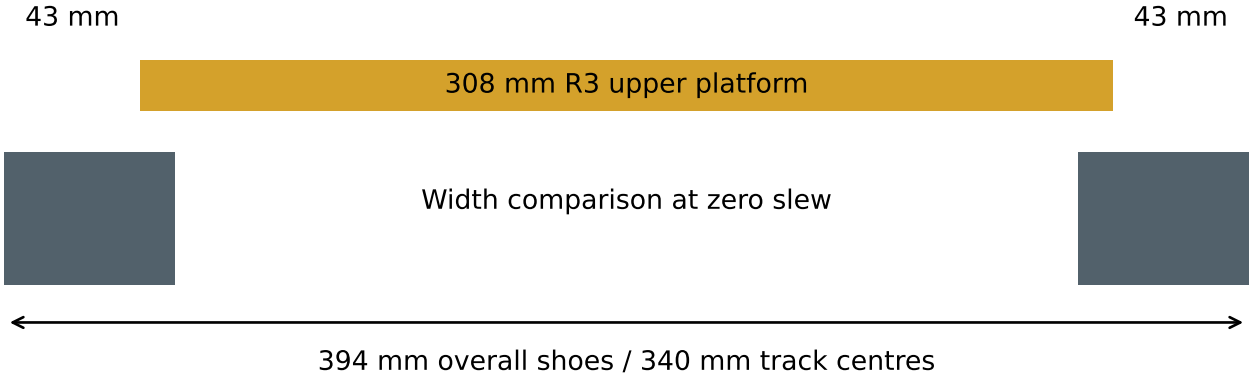

Sprocket engages steel bushings

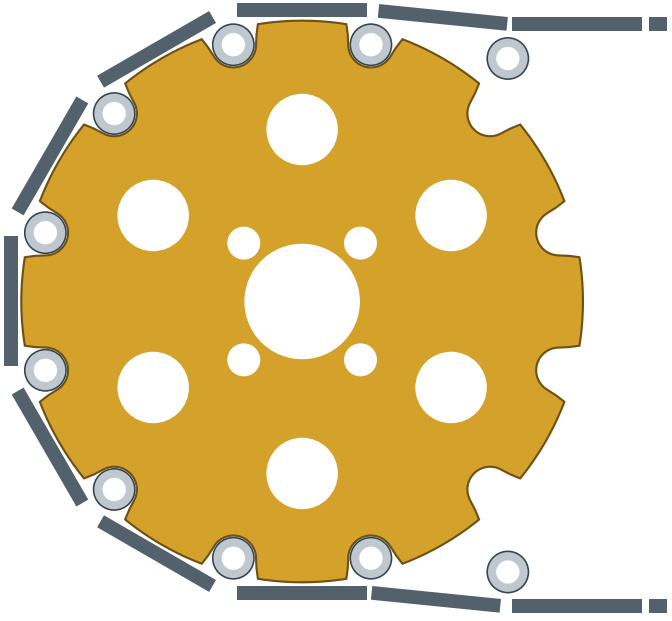

20 mm pitch · 12 teeth
Ø6 steel sleeve over Ø3 pin
0.3 mm nominal pocket clearance

Road roller / shoe cross-section

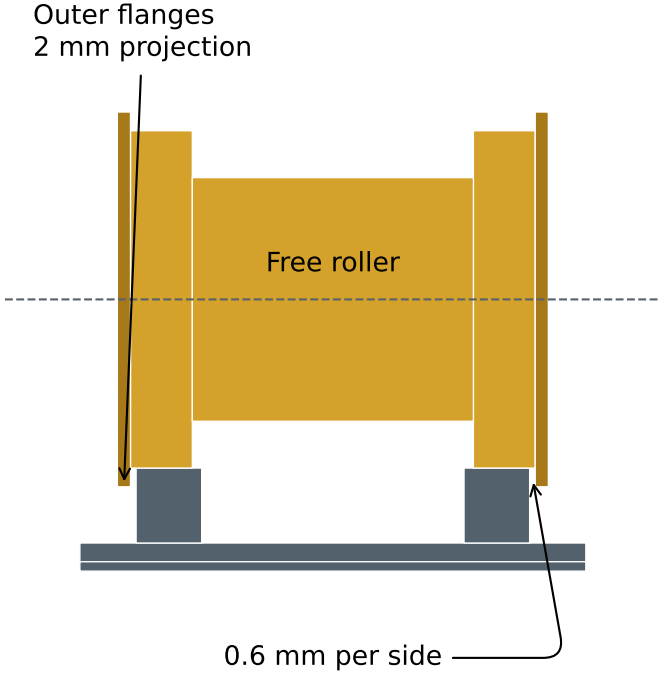

Running rims bear on both link rails
Clearance permits free chain articulation
Schematic section; bearings omitted