
大霸 机械
DABA MACHINERY

WENZHOU DABA MACHINERY

Win With The Ultimate Quality Meet
The Special Needs Of Each Need



DBZY-470B | Rotary Folding Machine

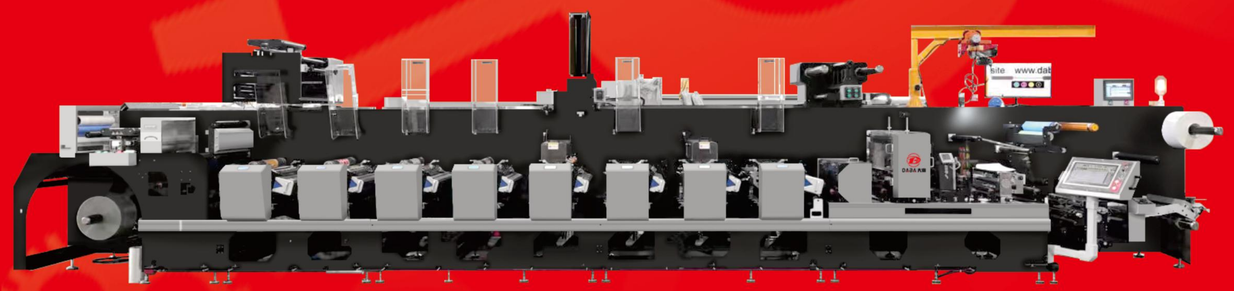

TECHNICAL PARAMETERS	
Max unwinding dia.	1200mm
Max folding length	500mm
Min folding length	100mm
Max folding width	470mm
Min folding width	60mm
Max folding height	300mm
Min slitting width	60mm
Source voltage	220V
Power	4KW
Main machine max speed	200times/min
Main machine size(L*W*H)	1360mm*1100mm*1280mm
Main machine weight	1000kg

DBRY320B-5C | Multifunctional Label Printing Machine

1. Unwinding Unit
2. Web Guide
3. Splice Table
4. Vertical Adjuster
5. Horizontal Adjuster
6. Flexo Printing Unit
7. Laminating Unit
8. Matrix Remove Unit
9. Die Cutting Unit
10. Rewinding Unit

TECHNICAL PARAMETERS	
Type	DBRY320B-5C
Printing speed	55--85m/min
Printing color	5 colors(1-10colors is optional)
Max. unwinding width	350mm(From 200-900mm is optional)
Max. Printing width	320mm
Max. unwinding diameter	600mm
Max. rewinding diameter	600mm
Printing girth	175-580mm
Precision of registering	±0.10mm
Dimensions	L3100mm×W2100mm×H2400mm
Machine weight	About 3550KG
Total power	38 kw

FEATURE

Our machine is suitable for printing on 30-250g Roll Paper or thickness no less than 20 micron BOPP, CPP, PET film(with UV).




DABA 大霸机械 Machinery

Add: Qianbu Industrial Zone,Xincheng Street,
Ruian City, Zhejiang Province, China.
Tel: +86-0577-6510 9033 Fax: +86-0577-6510 9033
Mobile: +86-13646551968 Email: daba@dabamachine.com
Web: www.dabamachine.com.cn

DBRY-370H

Unit Type Flexo
Printing Machine

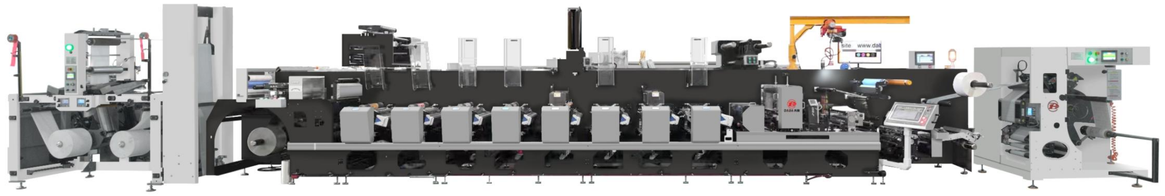

1. High work speed
2. Continuous Production
3. Reduced material waste
4. Reliable splicing
5. Less downtime
6. With our machine save 20% electricity and protect environment

FEATURE

Daba automatic unwinding and rewinding system ensures nonstop feeding and winding for web materials to printing and converting machinery. This state of the art system provides a fully integrated package that maintains non–stop production with no impact to the printing or converting process and save energy protect environment.

HAU-350A

Automatic Splicer
Machine



TECHNICAL PARAMETERS

Type	HAU-350A
Machine Weight	KGAbout 1500
Voltage	380V
Total power	4.5kw
Start Run Power	2.2kw
Dimensions	L2650mm*W1100mm*H2400mm
Maximum Unwinding Diameter	ϕ850
Max. Unwinding Width	320mm
Max. Run Speed	100m/min ; 180m/min
Unwinding Connect Paper Time	2Sec
Way Of Connect Paper	Oblique Connect
Angle Of Paper connect	10°
Edge position control	Digital Terminal EPC
Upload way	Manual pressure drawer
Pick Up Material Aligned	Laser Positing

SAC-350A

Automatic Turret
Rewinder Machine



TECHNICAL PARAMETERS


Type	SAC-350A
Max rewinding diameter	ϕ650mm
Min rewinding width	350mm
Max. Run Speed	180 m/min
Rewinding Connect Paper Time	1Sec
Way Of Connect Paper	Automatic pre-speed connect paper
Angle Of Paper connect	Flatly connected
Edge position control	Inter-line EPC
Unload way	Manual unloading unit
Paper core Aligned	Laser Positing
Dimensions	L1550mm*W1000mm*H1650mm
Machine weight	About 1200KG
Total power	6kw
Start Run Power	3kw
Voltage	Ø 380V, 50Hz, 3Phase

DBMQ-570D

UNWINDER&FULL ROTARY DIE-CUTTER
WITH NON-STOP WASTE MATRIX

DBDG-4B-570

4 Shafts Glueless fully
Non-Stop Turret Rewinder

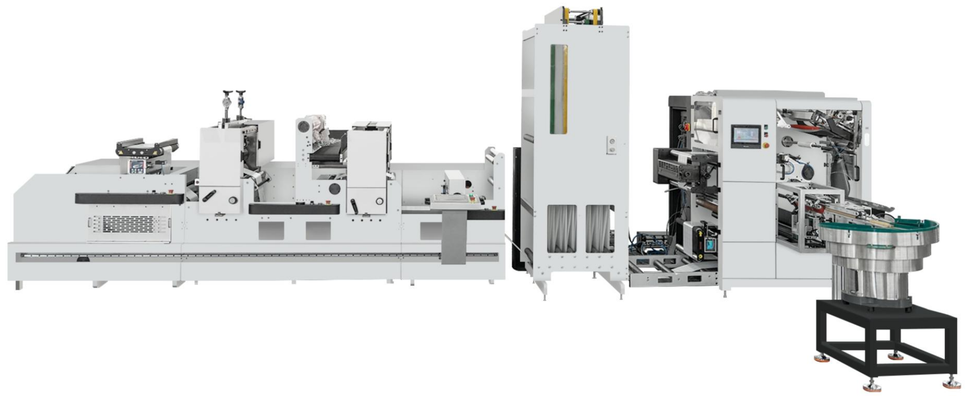

FEATURE


The full servo die-cutting machine with two die-cutting stations,equip with non-stop crush waste matrix, and glueless 4 spinles turret rewinder connection will be the perfect choice. The whole line will become fully non-stop connect with non-stop butt splicer.

TECHNICAL PARAMETERS

Type	330	450	570
Max rewinding diameter	300mm	300mm	300mm
Max width	330mm	450mm	570mm
Min rewinding width	40mm	40mm	40mm
Total power	8kw	14kw	16kw
Power supply	3PH+N+PE		
Machine dimension	1.45X3X1.7m	1.45X3.4X1.7m	1.45X3.6X1.7m
Machine weight	2.0T	2.5T	2.7T
Air pressure	0.8MPA		
Max speed	1-inch rewinding shaft:90m/min 1.5-3 inch rewinding shaft:120m/min		

DBMQ-480B

Fully Rotary One Head Die Cutting
Slitting Rewinding Machine

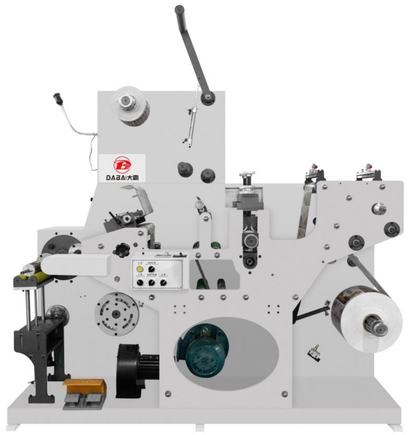

TECHNICAL PARAMETERS

Type	DBMQ-R320L	DBMQ-480B
Max. Speed	120m/min	120m/min
Max. Web Width	320mm	480mm
Max. Unwinding Dia.	500mm	500mm
Max. Rewinding Dia.	500mm	500mm
Dimension	1600*900*1300mm	1600*1000*1300mm
Weight	600kgs	700kgs

DBDG-4A 330

4 Spindles Automatic
Turret Rewinder



TECHNICAL PARAMETERS

Type	330	450
Max. Rewinding Dia.	350mm	350mm
Max. Width	330mm	450mm
Min. Rewinding Width	40mm	40mm
Total Power	14KW	16KW
Power Supply	3+N+PHPE	3+N+PHPE
Machine Dimension	1900*3000*1700mm	1450×3200×1700mm
Machine Weight	KGS2000	2200KGS
Air Pressure	0. 8mpa	0.8mpa

DBZS-370

Label Finishing
Converter Machine

FEATURE

DBZS-370 is an updated equipment of DBGS-370B, the machine update with the increased screen printing unit and flatbed die cutting/ hot foil unit, equipped with semi-rotary flexo printing unit intermittent die cutting and slitting. In flexo printing, can also support many jobs.



TECHNICAL PARAMETERS		
Type	DBZS-370	DBZS-450
Voltage	AC 380V 50HZ	
Max. Web Width	370mm	450mm
Max. Unwind Diameter	800mm	
Max. Rewind Diameter	800mm	
Application Material Thickness	30um-300um	
Max. Screen Printing Width	370mm	450mm
Max. Screen Printing Speed	80times/min	
Max. Flexo Printing Width	370mm	450mm
Max. Flexo Printing Speed	60-120m/min	
Max. Rotary Die Cutting Width	370mm	450mm
Die cutting Position Method	Color Sensor	
Magnetic Cylinder	140T(standard)/80T-120T(optional)	
Max. Hot foil Area	370mm*370mm	450mm*450mm

DBMQ-S370

Die Cutting Slitting
Rewinding Machine



FEATURE

The DBMQ-S370 is available in full-rotation and intermittent modes and is suitable for producing printed and blank labels. High precision and stable tension. The maximum rewinding and unwinding diameter reaches 800mm, and the machine running speed is 120m/min.

TECHNICAL PARAMETERS		
Type	DBMQ-S370	DBMQ-S450
Max. Web Width	370 mm	450 mm
Max. Unwind/Rewind Diameter	700 mm	700 mm
Max. Die Cutting Width	360 mm	440 mm
Full Rotary Speed	120 m/min	120 m/min
Intermittend Speed	60 m/min	60 m/min
Kiss-Cut Precision Accuracy	±0.10 mm	±0.10 mm
Die cutting Positioning Method	Color sensor	Color sensor
Standard(Optional) Magnetic Cylinder	140T(80T ~ 204T)	140T(80T ~ 204T)
Rating Voltage & Current	380V 50Hz 50A	380V 50Hz 50A
Power Consumption	19 kW	23 kW
Machine Weight	2800 kg	3500 kg

DBFQ-370H

High Speed Slitting
Rewinding Machine



FEATURE

DBFQ-370H High speed slitting machine is mainly for Narrow web label slitting,it adopts full servo motor driven system, Taper Tension control system,High quality Web Guide System, Turret type rewinding system.

TECHNICAL PARAMETERS		
Type	DBFQ-370H	DBFQ-450H
Max. slitting speed	350m/min	350m/min
Max. web	370mm	460mm
Min. slitting width	15mm	15mm
Quantity of slitting knife(up/down)	Circular knife / razor blade	Circular knife / razor blade
Max. unwinding dia.	800mm	800mm
Max. up rewinding dia.	450mm	450mm
Max down rewinding dia.	800mm	800mm
Air source	0. 8mpa	0. 8mpa
Total power	11KW	12KW
Weight	1300KGS	1500KGS
Dimension	2200mm×1350mm×1350mm	2200mm×1500mm×1350mm

DBFQS-320

Slitting with Semi-Turret
Rewinding Machine



FEATURE

DBFQS-320 Automatic slitting rewinding machine is an updated model of DBFQD-320, it remains the function of DBFQD-320 slitting rewinding machine, and adopt turret rewinding style at up rewinder, and keep easily exchange mode between different diameter size of aishafts.The increase of the preparatory airshaft improves the working efficiency of the slitting machine and is suitable for cutting paper of different core sizes.The structure of the complete machine is compact, with high speed, high efficiency, easy and steady operation.

TECHNICAL PARAMETERS		
Type	DBFQS-320	DBFQS-420
Max. slitting speed	120m/min	120m/min
Max. web width	320mm	420mm
Max. Unwinding Dia.	700mm	700mm
Max. Up Rewinding Dia.	250mm	250mm
Max. Rewinding Dia.	600mm	600mm
Precision of Slitting	±0.10mm	±0.10mm
Power	3.0kw	3.0kw
Dimension	1400*950*1500mm	1400*1050*1500mm
Weight	400kgs	500kgs

DBMQ-370B

Rotary Label Die Cutting Machine



FEATURE

1.Mainly used for narrow web width material slitting.
2.Adopt full servo motor driven system.
3.Adopt automatic taper tension control system.
4.Fully automatic on web guide job, rotary die cutting job, slitting width adjustment job and turret rewinding job.

TECHNICAL PARAMETERS

Type	DBMQ-370B	DBMQ-450B
Max.Web Width	380mm	460mm
Max. Die Cutting Width	370mm	450mm
Max. Die Cutting Speed	200m/min	
Max. Slitting Speed	300m/min	
Max.Unwinding Diameter	800mm	
Max.Up Turret Rewinding Diameter	280mm	
Max.Down Rewinding Diameter	800mm	
Slitting Knives	Circular Knife (for Paper)	Razor Blade (for Film)
Blades Quantity	8sets	
Rotary Die Cutting Repeat	178mm~580mm	
Die Cutting Precision	+0.15mm	

DBIML-370

Semi-rotary IML Die cutting Machine

FEATURE

The DBIML-370 is available in full-rotation and intermittent modes and is suitable for producing printed
and blank labels. High precision and stable tension. The maximum rewinding and unwinding diameter
reaches 800mm, and the machine running speed is 120m/min.

TECHNICAL PARAMETERS

Type	DBIML-370	DBIML-450
Max.Web Width	370mm	450mm
Max. Unwind/Rewind Diameter	700mm	700mm
Max. Die Cutting Width	360mm	440mm
Full Rotary Speed	120m/min	
Intermittend Speed	60m/min	
Kiss-Cut Precision Accuracy	+0.10mm	
Die cutting Positioning Method	Color sensor	
Standard(Optional)Magnetic Cylinder	140T(60T-204T)	
Rating Voltage & Current	380V 50HZ 50A	
Power Consumption	19KW	23KW
Machine Weight	2000kg	2500kg



DBMQ-F320U

High Speed Flatbed Die Cutting Slitting Machine

FEATURE

This is a kind of flat-bed die cutting machine with high precision and high speed. The paper-going is controlled by servo motor. Chinese web guiding do the web-guiding job. die cutting, laminating, waste rewinding, slitting or rewinding can be finished in the process.
The machine is applicable to die cut self adhesive labels, dacron film labels and laser anti-false labels, it is an ideal auxiliary of flexo printing machine, screen printing machine, relief printing machine and so on.



TECHNICAL PARAMETERS


Type	DBMQ-F320U	DBMQ-F420U
Die cutting speed:	400times / MIN (140M/MIN)	400times / MIN (120M/MIN)
Max. Putting diameter	700mm	700mm
Max. Web width	320mm	420mm
Max, Die cutting width:	300mm	400mm
Max. Die cutting length	300mm	400mm
Precision of chromatography	±0.01	±0.01
Total power:	2.5kw	2.5kw
Power supply voltage:	380v±10%	380v±10%
Machine weight	About 2800kg	About 3000kg
Dimensions	2600x850x1400mm	2600x950x1400mm

DBMQ-F320M

Automatic Sticker Adhesive Label Die-cutting Machine

FEATURE

The machine with flat to flat high-accuracy mould cut, tow aterial and cut into slices controlled by the computer, both sides of printing mark and its vertical is accurate to follow and make a reservation by three photoelectric eyes, mould cut, charge and abolish, cuts into slices or winding using for auto-sticking machine completed by once. It is suitable for paer do glue trade mark, acron membrane trade mark and laser false mould of trade mark cut very. This model is the auxiliary of flexible edition printer, intaglio printer, and anti-counterfeit trade mark mould cutter, and the best for each print factory.

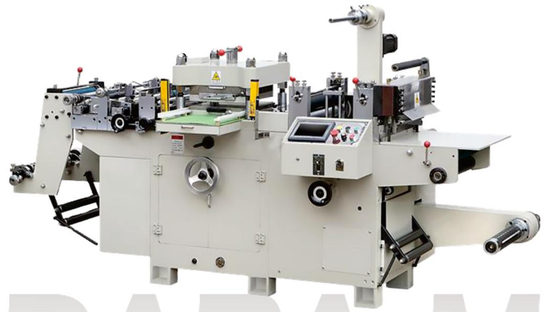

Type	DBMQ-F320M
Cutting speed	0-260times/min
Max. unninding diameter	450mm
Max web width	320mm
Max die cutting width	300mm
Max die cutting length	290mm
Orientation accuracy	0.15mm 3kw
Total power	4KW
Power voltage	220V±10%
Machine weight	1500kg
Overall dimensions	2600x950x1400mm

DABA MACHINERY

DBJY-320

Unit Type Offset
Printing Mmachine



FEATURE

Intermittent Label Offset Printing Machine adopts latest servo control system which can ensure the material nip steady and accuracy. It can free from the printing roller change.

TECHNICAL PARAMETERS	
Type	DBJY-320
Printing speed	50-180 rpm/min
Printing color	4-10colors
Max. printing length	350mm
Max. web width	320mm
Max. printing width	300mm
Max. unwinding diameter	700mm
Max. rewinding diameter	600mm
Power supply	3 phase 380V
Total power	33.6kw(without UV power)
Dimensions(L×W×H)	10550×1600×1800mm
Main machine weight	About 9.5 T

DBPJ-450

Automatic Label Inspecting
And Slitting Machine



FEATURE

DBPJ Automatic Label inspection system.
This machine is suitable for inspect medicine ,food,daily chemical electrical label printing process quality defect such as:Fundamental defect ,Gold stamp defect, cold stamp defect ,Overflow ,scratch ,Bubble and so on.

TECHNICAL PARAMETERS	
Type	DBPJ-450
Max. Web Width	450mm
Effective Detection Width	450mm
Max. Slitting Width	450mm
Min. Slitting Width	20mm
Max. Slitting Speed	350m/min
Max. Inspecting Speed	180m/min
Max. Unwinding Dia.	800mm
Max. Down Rewinding Dia.	700mm
Max. Up Rewinding Dia.	450mm
Up Rewinding Type	Turret type
Slitting Cutter	6 sets circular/razor knife
Servo Motor Driven	4pcs Servo motor

DB430F

Flexo CTP Plate Making Machine



DBQG-1000

Servo Motor Driven Tyep
With Whole Automatic Machine



DBQX-350

Ultrasonic Anilox
Roller Cleaning Machine



DBSL-1000

Double gantry allelectric
holding clip lifter



DBTB SERIES

Plate Mounter



DB-SB

DB-SB Series Plate Making Machine

