HJZ-370B 6色

机组柔版印刷机

6 colors unit type flexo printing machine



产品特点 Product features

该单元式柔印机是我们最新的机器，旨在具有高速和IML标签功能生产高质量标签，该机器尺寸紧凑，幅面路径短，可避免浪费 材料，整机采用全伺服电机保持张力 薄膜或纸张的平滑和稳定，是打印高的最佳机器质量标签。

This unit type flexo presses is our newest machine which aimed to produce high quality label with high speed and IML label function , This machine compact size and short web path keeps wastage of material ,The full machine adopt all servo motor which keep the tension of film or paper smoothly and stable. It is best machine to print high quality label.





主要技术参数 Main Technical Parameters

型号	Model	HJZ-370B
最大材料宽度	Max.Web width	380mm
最大印刷宽度	Max.Printing width	370mm
颜色数量	Color quanity	6 colors
最大放卷直径	Max.Unwind Diameter	700mm
最大收卷直径	Max.Rewind Diameter	700mm
最大印刷速度	Max.printing speed	120m/min
印刷精度	Printing Precision accuracy	±0.1mm
模切精度	Rotary die cutting accuracy	±0.15mm
印刷周长	Rang of printing	228.6-600mm(72-189Z)
模切速度	Max.label die cutting speed	100m/min
前套准	Pre –registration	Color sensor
材料厚度	Thickness of material	0.02mm—0.35mm
功率	Power	60KW 50/60HZ
所需的气压	Air Supply	0.8KPA
机器重量	Machine Weight	About 8000KG
机器尺寸（长*宽*高）	Machine Dimension	12500*1450*1500mm
原材料	Material	All Paper material , Aluminum material , some of unsupport film

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.






HRY-850A 4色

宽幅柔版印刷机
Flexographic Printing Machine

高效 快速 稳定
Flexographic Printing Machine

1. 液压自动上料
   Automatic hydraulic lifting device
2. 自动光眼纠偏
   Automatic optical eye correction
3. 电晕装置
   Corona treatment device
4. 印刷组
   Printing group
4. 控制台
   Control panel







产品特点 Product features

1. 采用陶瓷网纹辊传墨,停机时自动脱离印刷辊。
2. 每组单独的360°周向对版装置及独立的烘干系统。
3. 放料采用磁粉制动（自动恒张力控制）。
4. 收料采用变频电机（自动恒张力控制）。
5. 本机采用进口变频无级调速。
6. 收、放料设计有自动液压升降。
7. 本机功能齐全，从上料、电晕、纠偏、印刷、收料一次完成。

1. Adopt the anilox roller to spread ink.
2. Unwinding and rewinding are controolled by magnetic power brake, clutch, (or by automatic tension controller of mitsubishi, made in japan)
3. Each printing unit adopt 360° for registration.
4. Each printing unit have one IR drier.
5. The rubber roller can break away automatically while parking, and running at a low speed, in order to avoid ink being dry.
6. The main motor is adopted the import stepless, regulation of frequency conversion.
7. Unwinding, web guiding, printing, IR drying, die cutting, waste, rewinding, strimming, rewinding, can be finished in one process This is an ideal machine for printing factory to print many kinds of paper cup.

主要技术参数 Main Technical Parameters

印刷速度	Printing speed	50m-60m/min
印刷色数	Printing chromatic number	4 colors
进料宽度	Feed width	860mm
最大放卷直径	Max. unwinding diameter	1300mm
最大收卷直径	Max. winding diameter	1300mm
最大印刷尺寸	Max. print size	180-380mm
套印精度	Overprint precision	±0.15mm
电压	Voltage	380V±10%
总功率	Total power	36kw
总气压	Total pressure	0.6MP
重量	Weight	4500kg
外形尺寸	Outline dimension	4500×1800×2250mm


可根据客户要求定制不同规格 / According to customer requirements customize different specifications.



HRY-850C 4色

印刷冲切一体机

Four colors paper flexo printing machine with punching inline

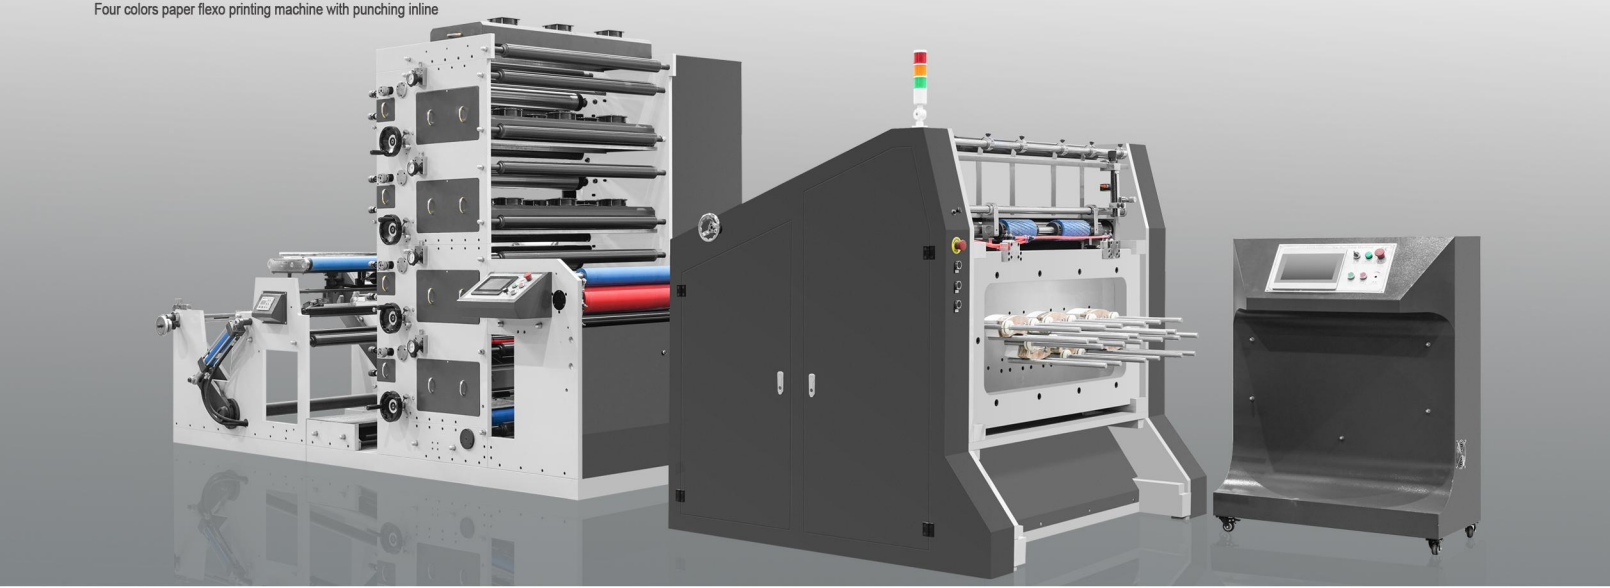

产品特点 Product features

这是一种经济环保的柔印和冲孔模切联机，当空白原料进入机器时，首先将其印刷，当印刷部分完成时，印刷品将进入冲孔模切部分，切割成纸张出口，如纸版，纸杯，冰淇淋筒等。机器由PLC控制，所有数据均显示在屏幕上。

This is an economical and environmental friendly flexo printing and punching die cutting inline, when blank raw material feed into machine, firstly it will be printed, and when printing part is finished, printed material will be run into punching die cutting part, cut into sheet outlet such as paper plate, paper cup, ice cream cone etc. Machine will be controlled by PLC, all data will be displayed on screen.









主要技术参数 Main Technical Parameters

型号	Model	HRY-850C-4C
印刷部分	Printing part	
印刷速度	Printing speed	40m/min
印刷颜色	Printing color	4 colors
最大印刷宽度	Print max width	850mm
放卷宽度	Unwind roll width	860mm
放卷直径	Unwind roll diameter	1300mm
印刷周长	Printing length	180-380mm
套色精度	Registering accuracy	±0.10mm
总功率	Total power	30KW
气压	Air press	0.6MP
电压	Voltage	380V±10%
机器尺寸（长*宽*高）	Machine dimension	3500X2300X2350 mm


可根据客户要求定制不同规格 / According to customer requirements customize different specifications.

冲切部分	Punching part	
冲切速度	Punching speed	190-200 times/min
最大进料宽度	Maximum feeding width	860mm
最大模切宽度	Maximum die cutting width	400*850mm
定位精准	Locating precision	±0.1mm
总功率	Total power	8.5kw
润滑系统	Lubrication system	Manual

HRY-320B 9色

多工位全伺服印刷机

Multi functional full servo flexo printing machine

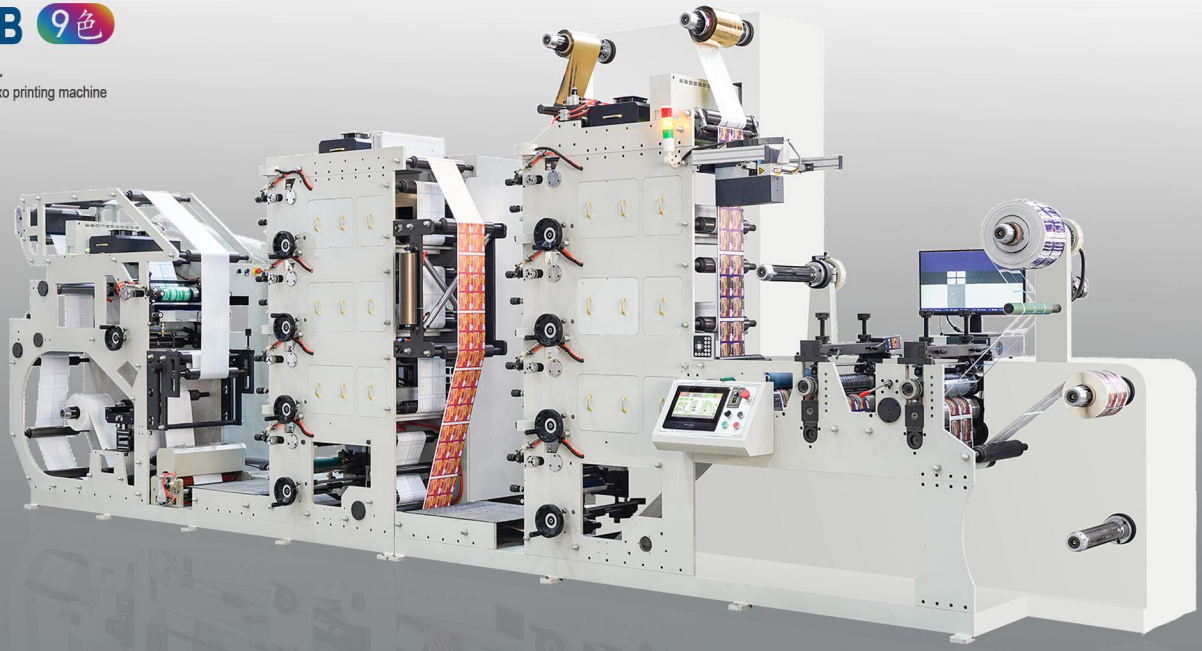

产品特点 Product features

1. 柔印机采用网纹辊涂墨。具有耐磨、防锈、使用寿命长等特点。可以提高印刷效率。
2. 柔印机的放卷由磁性动力制动器控制。收卷由伺服电机控制，张力设定由运动控制器控制触摸屏完成。
3. 柔印机垂直印刷单元采用360°伺服电机调节定位。
4. 柔印机的每个印刷单元都有一个红外干燥器。可选配UV干燥机。
5. 柔印机的胶辊可以在停车时自动脱离，并在低速运行，以避免水被晒干。
6. 整机采用伺服电机控制
7. 放卷、复卷轴采用空气轴，方便换料、卸料。
8. 柔性版印刷机的放卷、印刷、上光、红外干燥、覆膜、复卷等工序可一次完成，这种印刷机最适合各印刷公司印刷不干胶纸标签及其他商业标签、纸杯、铝箔、塑料薄膜等。

1. The flexo printing machine adopts the anilox rollers to spread ink. which is characterized by wearable, rust-resistant and long using life, etc. It can improve the printing efficiency.
2. Unwinding of the flexo printing machine is controlled by magnetism power brake. Rewinding is controlled by servo motor, tension setting will be done by motion controller control touch screen.
3. Vertical printing unit of the flexo printing machine adopt 360º servo motor to regulate for registration.
4. Each printing unit of the flexo printing machine has one IR drier. UV dryer can be optional.
5. The rubber roller of the flexo printing machine can break away automatically while parking, and running at a low speed, in order to avoid water being dried.
6. Whole machine is controlled by servo motor
7. Unwinding and rewinding shaft adopt air shaft, it's convenient to change load and unload the material.
8. Unwinding, printing, varnishing, IR drying, laminating and rewinding of the flexo printing machine can be finished in one process, this kind of printing machine is best for each printing companies to print on adhesive-paper labels and other commercial label,paper cup, aluminum foil, plastic film, etc.

主要技术参数 Main Technical Parameters

型号	Model	HRY-320B-9C
最大印刷速度	Maximum Printing speed	100m/min
印刷颜色	Printing color	9 colors(1+4+4 colors)
最大印刷宽度	Maximum printing width	320mm
最大材料宽度	Maximum web width	330mm
最大放卷直径	Unwind roll diameter	600mm
最大收卷直径	Rewind roll max diameter	600mm
印刷周长	Printing length	175-380mm
套色精度	Registering accuracy	±0.15mm
气压	Air press	0.6MP
电压	Voltage	380V±10%
机器重量	Machine weight	5000kg
机器尺寸（长*宽*高）	Machine dimension	5500X1350X2250 mm


可根据客户要求定制不同规格 / According to customer requirements customize different specifications.



HRY-850D 4色

柔版印刷机带切割

4 colors paper flexo printing machine with sheet cutting inline

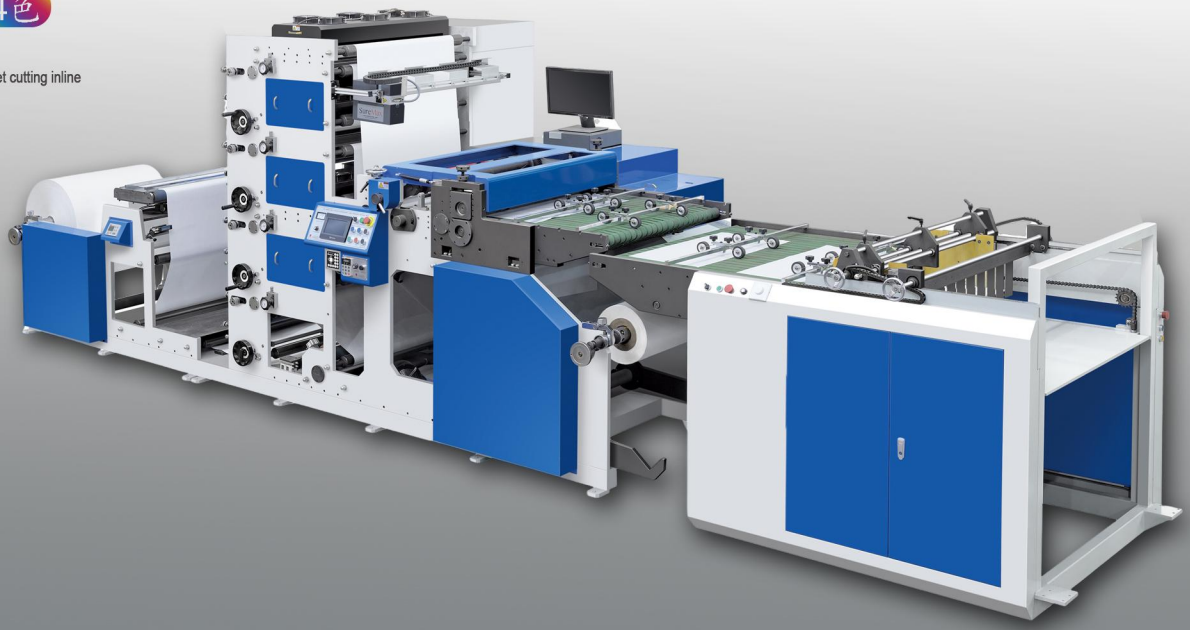


产品特点 Product features

本机采用电脑触摸屏控制的一体印刷横切机，操作方便，易学。从送纸到印刷，再到横切分切最后到堆叠成品都是一次性完成的。

This machine adopts computer touch screen control and manual operation as a whole inline machine (flexo printing and sheet cutting machine), which is easy to operate and easy to learn. From feeding to printing to slitting and stacking paper at one time.









主要技术参数 Main Technical Parameters

型号	Model	HRY-850D-4C
印刷部分	Printing part	
纸张厚度	Paper weight	30-400gsm
印刷速度	Printing speed	60m-80/min
印刷颜色	Printing color	4 colors
最大印刷宽度	Maximum web width	860mm
印刷周长	Maximum printing size	175-380mm
放卷直径	Maximum unwinding diameter	1300mm
套色精度	Register accuracy	±0.15mm
总功率	Total pressure	0.5Mpa
气压	Voltage	380V±10%

切割部分	Sheet cutting	
最大切割速度	Maximum cutting speed	60m/min
切割方式	Cutting way	Guillotine knife
最大切割长度	Maximum cutting length	400mm
最大卷宽度	Maximum roll width	860mm
空气压力	Air pressure	0.6Mpa
分切刀片	Slitting blade	3pcs air knives
自动上料输送机	Automatic feeding conveyor	One set
气压	Voltage	380V,50/60hz

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.



HMQ-560YC

双工位IML标签旋转模切机


Double Stations IML Label Rotary Die Cutting Machine

产品特点 Product features

IMQ-560YC 双工位模内贴标旋转模切机旨在满足日益增长的高速、精密标签生产需求。这款先进的模切机拥有卓越的灵活性和效率，专为模内贴标（IML）应用而设计，是包装、化妆品和食品生产等各行各业的理想之选。

The HMQ-B Double Stations IML Label Rotary Die Cutting Machine is designed to meet the growing demands of high-speed, precision label production. This advanced die-cutting machine offers exceptional flexibility and efficiency, specifically built for In-Mold Label (IML) applications, making it ideal for a variety of industries including packaging, cosmetics, and food production.







主要技术参数 Main Technical Parameters


型号	Model	HMQ-560YC
模切速度	Die cutting speed	120m/min
最大材料宽度	Maximum web width	550mm
模切重复长度（周长）	Die cutting repeat length (circumference)	350-600mm
最大放卷直径	Maximum unwinding diameter	1000mm
模切站	Die cutting station	2 stations
堆叠输送台	Conveyor and stacking unit	1 set
分切精度	Slitting accuracy	±0.1mm
总功率	Total power	About 15KW
气压	Air press	0.6MP
电压	Voltage	380v, 60HZ, 3PHASES
机器重量	Machine weight	3000KG
机器尺寸	Machine dimension	5500×1800×2000 mm
放卷气胀轴直径	Air expanding shaft diameter for unwinding	76mm(3") (also can be customized by client request)

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.

HMQ-320PA

商标模切机

Trademark Die-cutting Machine

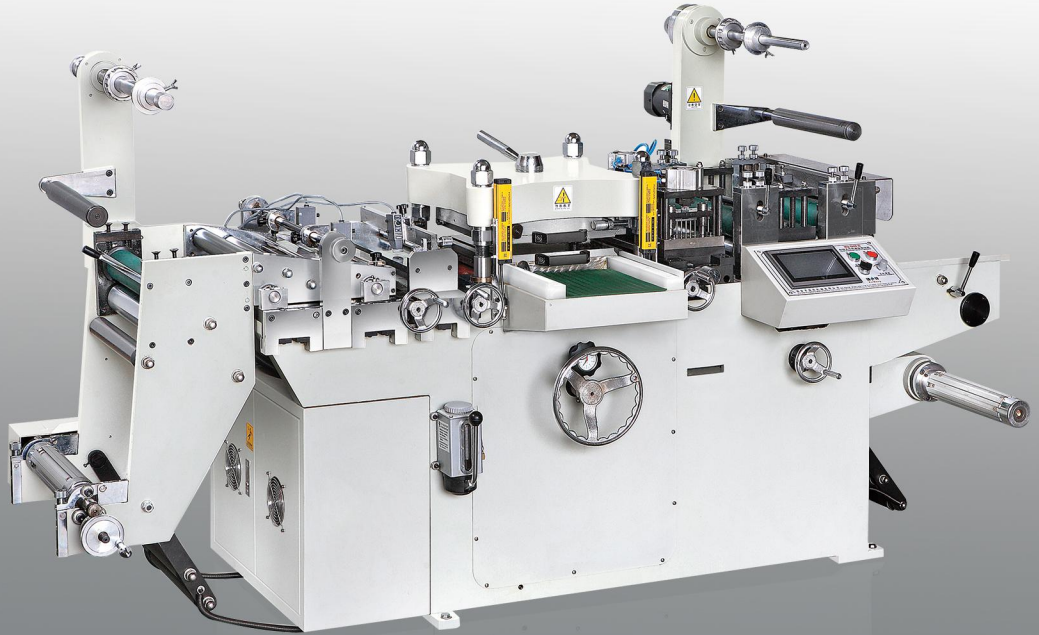

适用材料 Applicable materials

1. 胶贴产品：各种电子、电器、手机特殊胶垫、硅胶贴、魔术贴、导电胶、强力双面胶、日东3M索尼特殊背光屏等电子工业、IT业、薄膜开关。汽车制造业中所适用的胶贴产品。
2. 防尘材料：化妆棉、相机棉、高密海绵、过滤棉、防尘网、无纺布。
3. 防震产品：同力胶垫、橡胶胶垫、PORON垫、3M、阻燃EVA、高发泡。
4. 绝缘、EMI：防火快巴纸、铝箔、铜箔、PVC、PET、牛皮纸、海绵护套、珍珠棉护套。
5. 耐热隔热材料：矽胶片、透明云母片、纤维片、隔热棉（布）。



1. Adhesive products: all kinds of electronics, electrical appliances, mobile phone special rubber pad, silicone paste, magic paste, conductive adhesive, Strong double-sided adhesive, Nitto 3M SONY special backlight screen, electronic industry, IT industry, membrane switch. steam Adhesive products used in automobile manufacturing industry.
2. Dust materials: cotton, cotton cameras, high density sponge, filter cotton, dust-proof net, non-woven fabric.
3. Earthquake: rubber pad, rubber pad, pad PORON, 3M, EVA, high foamingd flame retardant.
4. Insulation, EMI, fireproof paper, aluminum foil, copper foil, PVC, PET, kraft paper, sponge sheath, Pearl cotton sheath.
5. Heat insulation materials: silicone sheet, transparent mica, fiber cloth, cotton insulation (cloth).

主要技术参数 Main Technical Parameters

型号	Model	HMQ-320PA
模切速度	Die cutting speed	20-180 times/min
放卷最大直径	Max. roll diameter	450mm
卷筒纸最大宽度	Max. web width	320mm
模切面积	Die cutting area	290*300mm
定位精准	Positioning accuracy	±0.10mm
总功率	Total power	3kw
整机重量	Weight	1700kg
外形尺寸	Outline dimension	2600*950*1400mm

可根据客户要求定制不同规格 /According to customer requirements customize different specifications.









HMQ-320PS

双座不干胶模切机

Double Stations Flatbed Die Cutting Machine For Adhesive Trademark



产品特点 Product features

该机是在标准单座平压平的基础上增加一组烫金工位，可以实现烫金模切一次性完成，也可以完成模切2次的工作。该机以平压平高精度模切，拖料及切片由伺服电脑控制，印刷标两面及纵向色标由三只光电眼精确跟踪定位，模切、收废、切片或自动贴标机用的卷筒收卷一次完成。非常适用于纸张不干胶商标、涤纶薄膜商标及镭射防伪商标的模切。该机是全轮转高速卷筒商标印刷机、柔性版印刷机、连续丝印机、凹版印刷机及防伪商标模压机最佳配套设备，是各商标印刷厂配套最理想高效率的机型。还适用于电子行业、胶粘带制品行业模切成型最佳设备。

TXM-200A two-seater type auto die cutting machine for self adhesive trademark adds one gold stamping station on the basis of TXM-200A two-seater type auto die cutting machine for self adhesive trademark. Gold stamping and die-cutting can be finished in one process. also can finish twice die-cutting.

The machine adopts accurate flatten die-cutting system, matenal towing is controlled by servo motor, printing on both sides and longitudial color logo by three photocells do the web-guiding job, Die-cutting, waste rewinding and rewinding(or sheeter) or automatic labeling machine with the drum winding can be finished in one process. It's suitable for die-cutting adhesive paper, dacron label and laser hologram mark.

This is the ideal association equipment for high speed rotary drum trademark printing machine, flexo printing machine, silk screen printing machine, gravure printing machine and hologram mark printing machine. It's the most efficient machine for printing house. Also it's suitable for electronic industry, and the best equipment of the adhesive tape products industry die cutting forming.





主要技术参数 Main Technical Parameters

型号	Model	HMQ-320PS
模切速度	Die cutting speed	20-300 m/min
最大材料宽度	Max. web width	320mm
最大放卷直径	Max. unwind roll diameter	500mm
最大收卷直径	Max. rewinding diameter	480mm
最大模切面积	Max. die cutting area(width*length)	300*300mm
定位精准	Positioning accuracy	±0.1mm
机器重量	Machine weight	About 2.8T

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.





HFQ-320AP

标签分切复卷机

Label slitting rewinding machine



产品特点 Product features

自动分切机HH-FQ-320B型是全自动卷筒商标印刷机、卷筒模切机的配套设备，具有PLC触摸屏控制、计米、计数功能，放卷采用光电眼控制。

Auto slitting machine HH-FQ-320B type is a complete set of equipment for full automatic roll trademark printing machine and roll die cutting machine. It has functions of PLC touch screen, meter counting, number counting, the unwinding is controlled by photoelectric eyes.





主要技术参数 Main Technical Parameters


Model	HFQ-320AP
Max web width	320mm
Max unwinding/rewinding diameter	600mm
The core diameter shaft of unwinding and rewinding	76mm
Cutting precision	±0.10mm
Slitting speed	120m/min
Main machine power	1.5kw
Overrll dimensions(L*W*H)	1500*1200*1500mm
Machine Weight	1000KG

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.

HMQ-320YC

双圆刀模切机（带双轴旋转收料）

Double Position Cutter

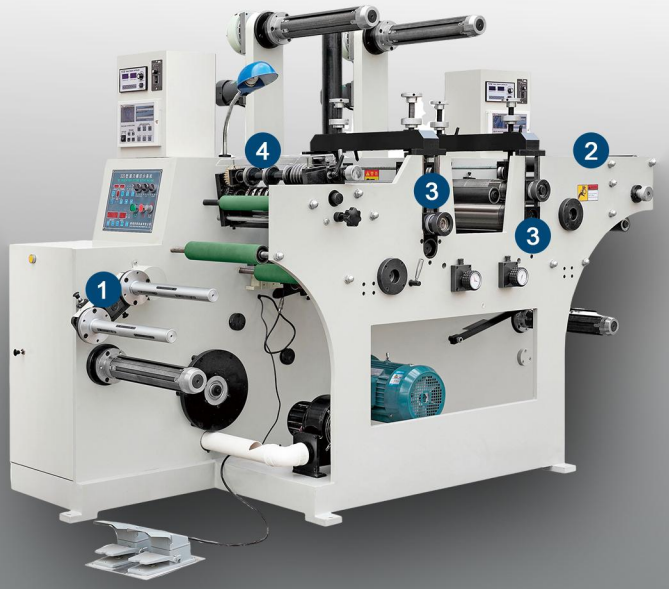


1. 双旋转收料 Double rotary feeding
2. 收编装置 Rectifying device
3. 双模切工位 Double die cutting station
4. 分切装置 Slitting device

产品特点 Priduct features

1. 本机采用带型传动，全磁粉恒力控制。
2. 收料双轴旋转装置。
3. 双工位模切装置。
4. 手脚共用启动停刹车按钮。

1. This machine adopts belt type transmission, all magnetic powder constant force control.
2. Receiving double shaft rotating device.
3. Double position die-cutting device.
4. Hands and feet start brake button.

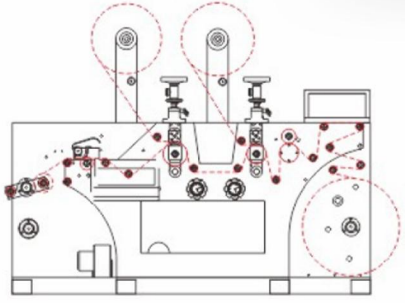

主要技术参数 Main Technical Parameters

型号	Model	HMQ-320YC
分切速度	Cutting speed	120 m/min
模切速度	Die cutting speed	80 m/min
最大进料宽度	Max. feed width	330mm
最大模切尺寸	Max. die size	180-380mm
旋转收料直径	Rotating diameter	200mm
最大放卷直径	Max. unwinding diameter	600mm
电压	Voltage	220V±10%
总功率	Total power	4.5kw
总气压	Total pressure	0.6mp
定位精准	Positioning accuracy	±0.15mm
重量	Weight	1500kg
外形尺寸	Outline dimension	2500*1200*1600mm

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.

HCQ-850A

全自动纸杯冲切机


High Speed Punching Machine For Paper Cup













主要技术参数 Main Technical Parameters

型号	Model	HCQ-850A
冲切速度	Punching speed	180-200 times/min
最大进料宽度	Max. feed width	860mm
最大放卷直径	Max. unwinding diameter	1400mm
最大模切宽度	Max. die width	400*850mm
定位精准	Accurate positioning	±0.15mm
最大堆垛长度	Max. stacking length	400mm
气压	Pressure	0.6mp
电压	Voltage	380v ±
总功率	Total power	8.5kw
重量	Weight	3500kg
外形尺寸	Outline dimension	3500*1600*2000mm

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.

HMQ-320YW

手环模切机

Tyvek wristband die cutting machine



产品特点 Product features

这个机器专门用于将高密度聚乙烯纤维材料（Tyvek）切割成腕带的新设计。 它适用于切割毛坯和底色Tyvek 材料。 模切、涂胶、输出可一步完成。 具有纠偏装置、热熔胶系统、轮转模切站、输送带等功能。该机具有结构紧凑、速度快、效率高、操作方便、运行平稳等特点。

It is new designs for specialized in cutting high density polyethylene fiber material(Tyvek) into wristband. it suitable for cut blank and base color Tyvek material. Die cutting, gluing and output can be finished in one process. It has function of web guide, hot melt glue system, rotary die cutting station, conveyor.The machine has the characteristics of compact structure, fast speed, high efficiency, easy operation,steady running etc.



主要技术参数 Main Technical Parameters

型号	Model	HMQ-320YW
模切速度	Die cutting speed	30m/min
材料宽度	Maximum web width	320mm
最大放卷直径	Unwind roll diameter	600mm
模切精度	position accuracy	±0.15mm
总功率	Total power	10KW
电压	Voltage	380V,3phase
机器尺寸	Machine dimension	4200X1300X1700 mm

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.









HMQ-320WP

PP 合成腕带模切机

PP Synthetic Wristband Die Cutting Machine

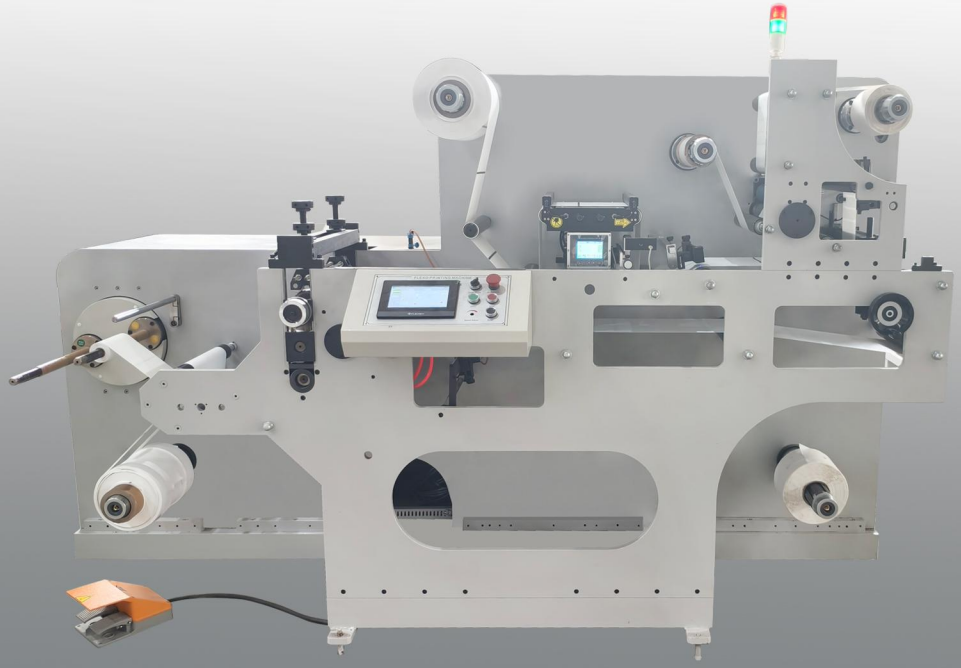







主要技术参数 Main Technical Parameters

型号	Model	HMQ-320WP
模切速度	Die cutting speed	30m/min
最大材料宽度	Maximum web width	320mm
最大放卷直径	Maximum Unwind diameter	450mm
最大贴标卷直径	Maximum Labeling roll diameter	300mm
最大废料直径	Maximum waste diameter	450mm
最大下收卷直径	Maximum lower winding diameter	600mm
最大上收卷直径	Maximum upper winding diameter	200mm
模切精度	Position accuracy	±0.15mm
总功率	Total power	10KW
电压	Voltage	380V,3phase
机器尺寸	Machine dimension(L*W*H)	2800×1400×1900mm
机器重量	Machine weight	1700KGS

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.

HRY-320M 2色

多工位印刷机

Multi Station Press

1. 放料光眼纠偏 Discharge optical eye correction
2. 印刷组 Printing group
3. UV烘干 UV Dry
4. 贴标装置 Labeling device
5. 模切组 Die cutting group
6. 接纸平台 Paper receiving platform



产品特点 Product features

1. 采用陶瓷网纹辊传墨,停机时自动脱离印刷辊。
2. 每组单独的360°周向对版装置及独立的烘干系统。
3. 收、放均采用磁粉制动、磁粉离合（自动恒张力控制）。
4. 本机采用进口变频无级调速。
5. 本机设计有停机时自动脱离墨辊，及缺料停机功能。
6. 本机功能齐全，从上料、纠偏、冷烫、印刷、腹膜、模切、分条、收料、断张均一次完成。
7. 本机配有多工位模切、多层复合装置，还配有贴标功能，适合多层复合膜切产品。

1. The use of ceramic anilox roller inking, automatic shutdown from the printing roller.
2. Each group of 360 degrees to the circumference of the plate device and independent drying system.
3. The collection and use of magnetic powder brake, magnetic powder clutch (automatic constant tension control).
4. The machine adopts imported frequency conversion stepless speed regulation.
5. This machine is designed with automatic roll out of shutdown, and lack of material stop function.
6. This machine is fully functional, from feeding, correcting, printing, die-cutting, perm, peritoneum,Points, receiving, breaking a uniform completion.
7. The machine is equipped with multi station die cutting, multi-layer composite device, also has a labeling function,Suitable for multilayer composite film cutting products.

主要技术参数 Main Technical Parameters

印刷速度	Printing speed	50-60m/min
印刷色数	Printing chromatic number	2 colors
最大印刷宽度	Max. printing width	410mm
进料宽度	Feed width	320mm
最大放卷直径	Max. unwinding diameter	600mm
最大收卷直径	Max. winding diameter	600mm
最大印刷尺寸	Max. print size	180-380mm
套印精度	Overprint precision	±0.15mm
电压	Voltage	380V±10%
总功率	Total power	20kw
总气压	Total pressure	0.6MP
重量	Weight	2800kg
外形尺寸	Outline dimension	6000×1300×2650mm


可根据客户要求定制不同规格 / According to customer requirements customize different specifications.



全伺服间歇模切机旋转双收

Full servo semi rotary die cutting machine with slitting and turret rewinding

HMQ-350JE

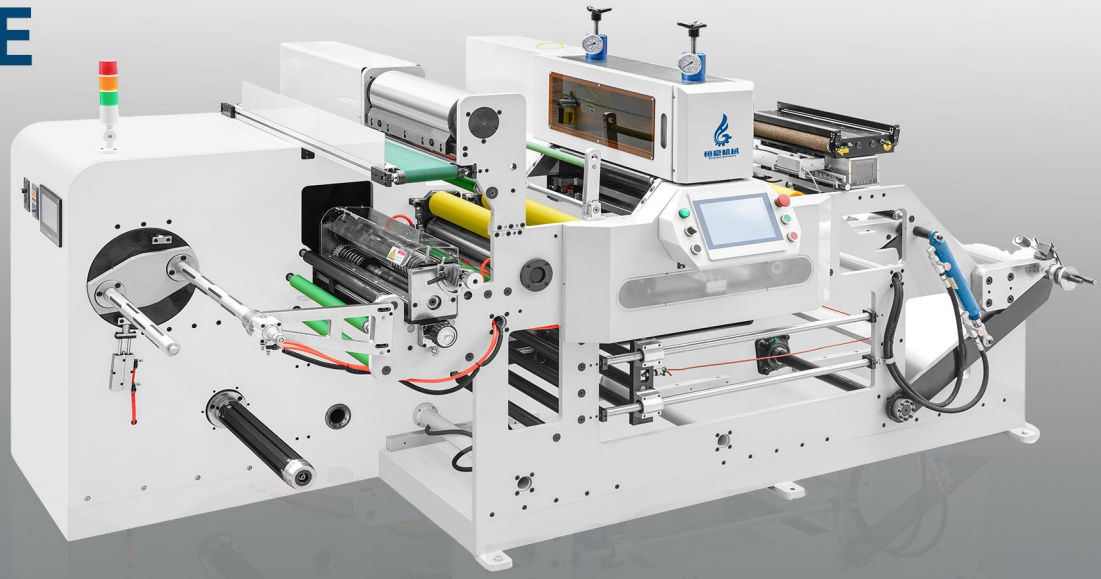

产品特点 Product features

间歇式半轮转模切机是一种新产品，它配备了伺服电机运动控制系统，并配有套准传感器来布置高精度的轮转模切系统。本机适用于预印标签。放卷、圆压圆模切、分切、复卷一次完成。它可以以半旋转模式运行，也可以以全旋转模式运行。半回转时，机器可以倒退，无需针对不同的标签更换不同的磁辊。只需要更换柔性模具。该机器配备了纠偏装置，可以平稳地引导材料。该机具有结构紧凑、速度快、效率高、操作方便、分切准确、运行平稳等特点。



Intermittent Semi-rotary die cutting is a new product, it equipped with Servo Motor motion control system, and register sensor to arrange high accurate rotary die-cutting system. This machine is applicable to pre-printed labels. Unwind, rotary die-cutting, slitting and rewinding can be finished in one process. It can be run with semi-rotary mode as well as full rotary mode. With semi-rotary time, the machine doesn't need to change different magnetic cylinders for different labels because it can go backward. Only flexible die is required to be changed. The machine was equipped with web guiding to guide the material smoothly. The machine has the characteristics of compact structure, fast speed, high efficiency, easy operation, accurate slitting, steady running etc.

主要技术参数 Main Technical Parameters

型号	Model	HMQ-350JE
最大的材料宽度	Maximum web width	350mm
最大放卷直径	Maximum unwinding diameter	600mm
最大收卷直径	Maximum rewinding diameter	600mm
最大半轮转模切速度	Die cutting speed (semi-rotary)	50m/min
最大全轮转模切速度	Die cutting speed (rotary)	120m/min
最大分切速度	Maximum slitting speed	120m/min
模切长度（间歇模式）	die cutting length (Semi-rotary)	476mm(namely 150T)
模切长度（全轮转）	die cutting length (full rotary)	570mm(namely 180T)
模切定位	Die cutting positioning way	Color sensor
标配磁性辊	Standard magnetic cylinder	150T (476mm)
分切宽度	Slitting device	12-350mm
电压	Voltage	380V+N+PE
机器尺寸	Machine dimension	2200x1300x1500mm
机器重量	Machine weight	1600kg

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.









HMQ-350JA

全伺服间歇模切机

Full servo intemittent die cutting machine



产品特点 Product features

间歇式半轮转模切机是一种新产品，它配备了伺服电机运动控制系统，并配有套准传感器来布置高精度的轮转模切系统。本机适用于预印标签。放卷、圆压圆模切、分切、复卷一次完成。它可以以半旋转模式运行，也可以以全旋转模式运行。半回转时，机器可以倒退，无需针对不同的标签更换不同的磁辊。只需要更换柔性模具。该机器配备了纠偏装置，可以平稳地引导材料。该机具有结构紧凑、速度快、效率高、操作方便、分切准确、运行平稳等特点。

Intermittent Semi-rotary die cutting is a new product, it equipped with Servo Motor motion control system, and register sensor to arrange high accurate rotary die-cutting system. This machine is applicable to pre-printed labels. Unwind, rotary die-cutting, slitting and rewinding can be finished in one process. It can be run with semi-rotary mode as well as full rotary mode. With semi-rotary time, the machine doesn't need to change different magnetic cylinders for different labels because it can go backward. Only flexible die is required to be changed. The machine was equipped with web guiding to guide the material smoothly. The machine has the characteristics of compact structure, fast speed, high efficiency, easy operation, accurate slitting, steady running etc.



主要技术参数 Main Technical Parameters

型号	Model	HMQ-350JA
最大的材料宽度	Maximum web width	350mm
最大放卷直径	Maximum unwinding diameter	600mm
最大收卷直径	Maximum rewinding diameter	600mm
最大半轮转模切速度	Die cutting speed (semi-rotary)	50m/min
最大全轮转模切速度	Die cutting speed (rotary)	120m/min
最大分切速度	Maximum slitting speed	120m/min
模切长度（间歇模式）	die cutting length (Semi-rotary)	476mm(namely 150T)
模切长度（全轮转）	die cutting length (full rotary)	570mm(namely 180T)
模切定位	Die cutting positioning way	Color sensor
标配磁性辊	Standard magnetic cylinder	150T (476mm)
分切宽度	Slitting device	12-350mm
电压	Voltage	380V+N+PE
机器尺寸	Machine dimension	2200x1300x1500mm
机器重量	Machine weight	1600kg

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.









HMQ-350PG

全自动高速模切机

High Speed Die Cutting Machine



产品特点 Product features

纸张不干胶商标、胶带制品的模切，该机是全轮转高速卷筒商标印刷机、柔性版印刷机、卫星式印刷机、PS 版印刷机、间歇式印刷机的最佳配套设备。

It used for die cutting adhesive label, adhesive tape product, this machine is best working with high speed roll feeding label printing machine, flexo printing machine, central drum type flexo printing machine, Ps printing machine, batch type printing machine.



主要技术参数 Main Technical Parameters

型号	Model	HMQ-350PG
最大放卷宽度	Max. Feeding width	350mm
模切面积	No.1 cutting area	350*350mm
最高速度	Max. speed	400times/min
最大米数	Max. length of meter	80m/min
模切精度	Position accuracy	±0.10mm
最大放卷直径	Max. unwinding diameter	800mm
最大收卷直径	Max. rewinder diameter	800mm
机器尺寸	Size(L*W*H)	3300*1400*1500mm
电压	Voltage	380v,3phase
总功率	Total power	11kw
机器重量	Weight	2800kg

可根据客户要求定制不同规格 / According to customer requirements customise different specifications.





More Supporting Products

更多配套产品

恒豪机械 Heng hao machinery



HRY-320 4色柔版印刷机 4 Color Flexo Printing Machine

印刷速度	Printing speed	50m-80m/min
最大印刷宽度	Max. printing width	320mm
进料宽度	Feed width	330mm
最大放卷直径	Max. unwinding diameter	600mm
最大收卷直径	Max. winding diameter	600mm
最大印刷尺寸	Max. printing size	175-380mm
套印精度	Printing precision	±0.15mm
电压	Voltage	380V±10%
总功率	Total power	30kw
总气压	Total pressure	0.6MP
重量	Weight	2500kg
外形尺寸	Outline dimension	2700×1200×2200mm

HRY-320 6色全UV柔版印刷机 6 Color UV Flexo Printing Machine

印刷速度	Printing speed	50m-80m/min
最大印刷宽度	Max. printing width	320mm
进料宽度	Feed width	330mm
最大放卷直径	Max. unwinding diameter	600mm
最大收卷直径	Max. winding diameter	600mm
最大印刷尺寸	Max. printing size	175-380mm
套印精度	Printing precision	±0.15mm
电压	Voltage	380V±10%
总功率	Total power	35kw
总气压	Total pressure	0.6MP
重量	Weight	3500kg
外形尺寸	Outline dimension	2700×1200×3200mm





HFQ-320 简易分切机 Simple Slitter Machine

分切速度	Cutting speed	120m/min
最大进料宽度	Max. feed width	330mm
最大收卷直径	Max. winding diameter	500mm
最大放卷直径	Max. unwinding diameter	600mm
最小分切宽度	Min. cut width	15mm
电压	Voltage	220V±10%
总功率	Total power	2.5kw
定位精度	Positioning accuracy	±0.15mm
重量	Weight	600kg
外形尺寸	Outline dimension	1200×1100×1400mm

HFQ-1200 宽幅分切机 Wide Slitting Machine

放卷最大直径	Max. diameter of unwinding	φ800mm
放卷最大宽度	Max. width of unwinding	1200mm
分切卷材宽度	Cutting width	300-1200mm
分切厚度	Cutting thickness	0.05-0.8mm
收卷最大直径	Max. diameter of take-up	φ400mm
机械速度	Mechanical speed	150m/min
纠偏误差	Error correction error	±±0.5mm
张力控制方式	Tension control mode	总张力气胀轴
机器重量	Machine weight	2800kg
外形尺寸	Outline dimension	3000mm





HRY-320 2色柔版印刷机 2 Color Flexo Printing Machine

印刷速度	Printing speed	50m-80m/min
最大印刷宽度	Max. printing width	320mm
进料宽度	Feed width	330mm
最大放卷直径	Max. unwinding diameter	600mm
最大收卷直径	Max. winding diameter	600mm
最大印刷尺寸	Max. printing size	175-380mm
套印精度	Printing precision	±0.15mm
电压	Voltage	380V±10%
总功率	Total power	16kw
总气压	Total pressure	0.6MP
重量	Weight	1200kg
外形尺寸	Outline dimension	2700×1200×1400mm

HRY-320 5色柔版印刷机 5 Color Flexo Printing Machine

印刷速度	Printing speed	50-60 m/min
印刷色数	Printing chromatic number	5 colors
进料宽度	Feed width	320mm
最大放卷直径	Max. unwinding diameter	600mm
最大收卷直径	Max. winding diameter	600mm
最大印刷尺寸	Max. print size	180-380mm
套印精度	Overprint precision	±0.15mm
电压	Voltage	380V/10%
重量	Weight	2500kg
外形尺寸	Outline dimension	2500*1200*2650mm





HH 贴版机 Plate Mounting Machine

型号 Model	最大版辊长度 Max. roll length (mm)	最大版辊周长 Max. roll circumference (mm)	设备尺寸 Dimensions L×W×H (mm)	重量 Weight (kg)
HH-320	320	800	920×600×1650	160
HH-650	650	800	1050×600×1650	200
HH-1000	1000	1200	1500×600×1650	280
HH-1200	1200	1200	1700×600×1650	320
HH-1300	1300	1200	1800×700×1650	340
HH-1500	1500	1200	2100×700×1650	400
HH-1800	1800	1200	2400×700×1650	460

HH-320 平台式复卷机 Platform Type Rewinder Machine

检测平台面积	Detection platform area	320×1000mm
最大卷筒直径	Maximum drum diameter	450mm
速度	Speed	40m/min
电机电压功率	Motor voltage and power	1.5kw
机器包装尺寸	Machine packing dimensions	1800×840×1200mm
重量	Weight	250kg





HRY-320 1色烫金印刷机 1 Color Cold Stamping Printing Machine

印刷速度	Printing speed	50m-60m/min
最大印刷宽度	Max. printing width	320mm
进料宽度	Feed width	330mm
最大收卷直径	Max. unwinding diameter	600mm
最大收卷直径	Max. winding diameter	600mm
最大印刷尺寸	Max. printing size	175-380mm
最大烫金幅面	Max. gilding width	320×380mm
电压	Voltage	380V±10%
总功率	Total power	10kw
总气压	Total pressure	0.6MP
重量	Weight	1000kg
外形尺寸	Outline dimension	1700×1200×1700mm

HFQ-320 双轴旋转分切机 Two Axis Rotary Slitter Machine

分切速度	Cutting speed	100m/min
最大进料宽度	Max. feed width	330mm
最大收卷直径	Max. winding diameter	200mm
最小分切宽度	Min. cut width	15mm
电压	Voltage	220V±10%
总功率	Total power	2.5kw
定位精度	Positioning accuracy	±0.15mm
重量	Weight	500kg
外形尺寸	Outline dimension	1000×1000×1300mm





HH 柔版晒版机 Flexo Plate Making Machine

型号 Model	晒版面积 Printer area	机型尺寸（宽×深×高） Measurement(w×d×h)	功率 power
ZX-400	430×320mm	710×610×1050mm	2.2kw
ZX-600	600×400mm	860×710×1050mm	2.3kw
ZX-800	800×600mm	1090×910×1150mm	3.5kw
ZX-900	900×600mm	1190×910×1150mm	3.7kw
ZX-1000	1000×600mm	1290×910×1150mm	3.8kw
ZX-1200	1200×600mm	1490×910×1190mm	3.9kw
ZX-1210	1200×1000mm	1490×1310×1190mm	4.2kw

HH-500 纸管切管机 Paper Core Cutting Machine

纸管直径	Cutting speed	50-200mm
纸管厚度	Max. material width	1-20mm
切刀数量	Max. material diameter	1
切割方式	Max. winding diameter	纸管转 Paper tube rotation
重量	weight	300kg
总功率	Total power	1kw
上下料方式	Up and down Material method	手动 Manual
尺寸	Outline dimension	1200×500×800mm



Rewinding Machine





特点/Features

本机采用品牌电机/减速机，数显调速器，无级变速，确保机器运行稳定；采用计米传感器，可设定米数自动停机。
本机的收/放卷卷轴采用气胀轴。采用磁粉张力，张力可调。顺时针旋转调节开关，可从低速缓慢增加到所需速度。

Adopt brand motor/reducer, digital display governor, stepless speed change to ensure stable operation of the machine.
Using the meter sensor, you can set the number of meters to automatically stop.
The rewinding/unwinding reel adopts an inflatable shaft.
Using magnetic powder tension, the tension can be adjusted.
Rotate the adjustment switch clockwise to slowly increase from low speed to desired speed.

Main Technical Parameters

Machine Model	GW-FJ-450A	GW-FJ-450B
Maximum Take-Up/Unwind Diameter	450 mm	450 mm
Rewind/Unwinding Diameter	3 In	3 In
Rewind/Unwind Reel Height	300 mm	300 mm
Speed	10-40 m/min	10-40 m/min
Weight Capacity	20 kg	30 kg
Power	120 W	200W
Power Supply	220 V	220 V
Weight	60 kg	60 kg
Mechanical Dimensions(L*W*H)	640*450*680mm	640*550*680mm

Rewinding Machine (with Web Guide、Inkjet Coding)





特点/Features

本机配备精准定位PLC触摸屏程序控制，全触摸屏操作。可根据不同需求和行业特性，配置不同功能和配置进行选配加装。工作效率高，体积小，可稳定适应电压范围工作。

This machine is equipped with precise positioning plc touch screen control, full touch screen operation.
The characteristics of the business are different, the same needs are sought, the different functions are arranged, the selection is made, and the arrangement is different.
High work efficiency, small size, flexible and flexible electric machine.

Main Technical Parameters

Machine Model	GW-FJ-450E	GW-FJ-450ES
Maximum Take-Up/Unwind Diameter	450 mm	450 mm
Rewind/Unwind Reel Diameter	3 In	3 In
Rewind/Unwind Reel Height	300 mm	300 mm
Speed	10-40 m/min	10-40 m/min
Weight Capacity	30 kg	30 kg
Power	200W	
Power Supply	220 V	220 V
Weight	60 kg	60 kg
Mechanical Dimensions(L*W*H)	640*550*680mm	640*550*680mm

Automatic Rewinding Machine (with Web Guide)



特点/Features

本机采用直流纠偏控制系统，机器运行平稳、静音、耐用；采用超声波传感器，感应透明材料。
采用磁粉制动器，方便控制放卷张力和材料松紧。机器纠偏到极限位置，自动停机并报警。

Adopting the dc correction control system, the machine runs smoothly, quietly and durable.Ultrasonic sensors are used to sense transparent materials."
Using magnetic powder brake, it is convenient to control the unwinding tension and the tightness of the material. The machine will automatically stop and give an alarm when the machine is rectified to the limit position. When the machine is unattended, it will stop and give an alarm after the machine is running.

Main Technical Parameters

Machine Model	GW-FJ-400C
Maximum Paper Width	400 mm
Weight Capacity	50 kg
Diameter Of Air Shaft	3 In
Rewinding/Unwinding Diameter	650 mm
Power Supply	220v 1kw
Tension	0-25 N
Net Weight	280 kg
Mechanical Dimensions(L*W*H)	1000*1150*1200mm

Desktop Platform Winding Machine





特点/Features

本机器PLC系统具有计米功能，用于设备视觉检测及停机，方便用户处理不良品。张力系统自动调整参数，确保与实际纸张所需的张力相匹配。机器触摸屏支持预设米数输出设置，并可根据设定的米数值停机。

The tension system automatically adjusts parameters to ensure that it matches the tension required by the actual paper.
The machine plc system has a meter counting function, which is used for visual inspection and shutdown of the equipment so that users can deal with defective products.
The machine's touch screen supports preset meter output settings, and can stop the machine according to the set meter value.


Main Technical Parameters

Machine Model	GW-FJ-230S
Coil Width Range	20mm～230mm
Maximum Unwinding Diameter	Φ400mm
Maximum Winding Diameter	Φ400mm
Retracting And Unwinding Air Shaft Size	3 Inches (Standard Configuration Of Φ76mm);
Maximum Detection Speed	60m/min; Rewinding Speed 120m/min;
Start Acceleration	≤5s Deceleration Stop Time: ≤2.5s;
Defect Shutdown Accuracy	±50mm
Winding End Surface Uniformity	±0.2mm
Unwinding Tension Range	10~100N (According To Operation Settings)
Unwinding Tension Accuracy	±5N
Rewinding Tension Range	10~100N
Winding Tension Accuracy	±3N
Weight	300kg
Sizes(L*W*H)	1250*1200*1200mm

AC-1300

纸管切割机

Paper core cutting machine

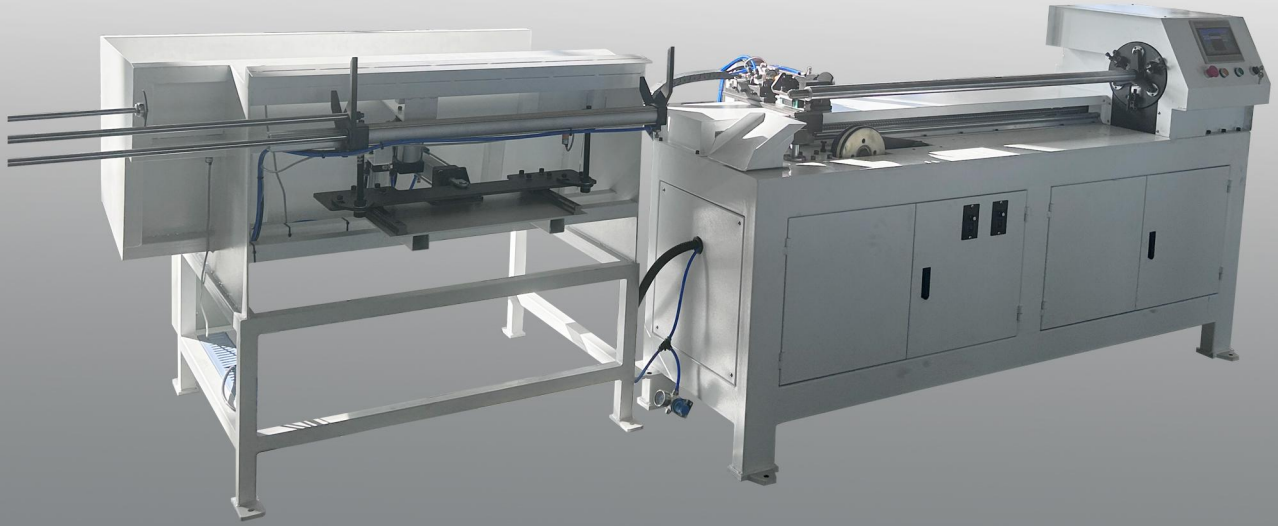

产品特点 Product features

适用于大批量、短长度纸管的切割。
智能、高效、稳定、结构精简，维护成本低。
采用伺服定位系统，自动切管计数，自动停机。
料仓容量大，采用气缸自动上下料，自动装载和卸载纸管，无需人工，解放双手。
数控单刀精密切管，规格任意设定，无需排刀，纸管端面光滑平整，无毛刺，节省人工。
适用于批量、短长度纸管生产，广泛应用于纺织、文具、日用卫生用品、烟花爆竹、塑料、印刷、包装等行业。

Suitable for large quantity and need to cut short-length paper tube cutting. Intelligent, efficient, stable, streamlined structure, low maintenance cost. Adopt servo positioning system, automatic tube cutting counting, automatic shutdown. The silo has a large capacity, and uses a cylinder to automatically load and unload materials, automatically withdraw the tube, no manual labor is required, and your hands are free. CNC single-knife precision tube cutting, arbitrary specification setting, no knife arrangement, smooth and flat paper tube end surface without burrs, saving labor. Suitable for batch and short-cut paper tube production, widely used in textile, stationery, daily hygiene products, fireworks, plastics, printing, packaging and other industries.

主要技术参数 Main Technical Parameters

型号	Model	AC-1300
最大纸管长度	Max tube length	1300mm
切割宽度	Cutting width	10-120mm
最小切割宽度	Min cutting width	10mm
纸管内径	Paper core inner diameter	25-76mm
纸管壁厚	paper core thickness	2-10mm
切割方式	Cutting way	Paper tube rotates
活动杆	Movable bar	ball
刀数量	Knife quantity	1
切割刀片	Cutting blade	Tungsten steel alloy
主电机功率	Motor	3.2kw
调速	Adjust speed	Servo motor
操作员	Operator	1
电源	Power supply	220V, 1P, 50Hz
重量	Weight	600KG
包装尺寸	Packing dimensions	2100*850*1500 1800*1400*1100

可根据客户要求定制不同规格 / According to customer requirements customize different specifications.





Plate Washing Machine

洗版机



FEATURE:

The quick and gentle cleaning process is fully automatic and leaves the plates 100% clean and dry within very short time.

★Manual cleaning is easy to damage the printing plate. From a health and safety perspective, this approach is time-consuming and often problematic. The operator's main energy should be devoted to the printing process and printing preparation.

★All types of ink are possible, and this machine is designed for environmentally friendly cleaning.

★The machine is made of stainless steel casing, which is more high-grade and durable.

★After the printing operation is complete, all the printing plates are placed on the conveyor belt, and the printing plate is automatically brought into the whole cleaning process.

★The washing and rinsing series provides an automatic two-stage cleaning process. The first stage is liquid cleaning and the second stage is rinsing with water.

★The liquid is provided with a circulating filtration function.

主要技术参数 Main Technical Parameters

Model	XBJ450	XBJ650	XBJ1050	XBJ1350	XBJ-1800
Max plate length(mm)	450	650	1050	1350	1800
Machine dimension(mm)	2350*1100*1150	3370*1350*1150	3370*1500*1150	3370*1920*1150	3370*2370*1150
Power	2.7kw	3.5kw	4.7kw	5.5kw	6.7kw
Machine weight	370kg	450kg	550kg	630kg	720kg
voltage	220v				

Anilox roller washing machine

网纹辊清洗机



FEATURE:

★Economical and practical cleaning equipment with multiple remarkable functions
★Small and exquisite, easy to operate
★Safe and effective cleaning anilox roller
★Suspension type of design, exchangeable and optional between single frequency and double frequency.Single frequency: 40 KHz, stabilized and reliable, cleaning thoroughly. Multiple frequencies – after removing stubborn dirt with low frequency, you can clean highly precisely.
★Customized cleansers of different sizes can be available
★Equipped with roller swiveling wheel
★Equipped with heating and constant temperature system
★The waterproof function has been largely improved, which makes the product durable and safe
★Stainless steel shell, making the product more graceful and durable in use
★The cleaning fluid can be made with tap water and a bit of special solvent
★High-power cleaning effect is so significant that can be visible with naked eyes.

主要技术参数　　Main Technical Parameters

Machine model	ZX320	ZX450	ZX650	ZX850	ZX1000	ZX1200	ZX1800
Ultrasonic number(pcs)	16	18	24	27	33	39	60
Ultrasonic power(w)	960	1080	1440	1620	1980	2340	3600
Ultrasonic frequency (khz)	40						
heating power(w)	1000			2000			3000
anilox roller length (mm)	0-350	0-450	0-660	0-860	0-1060	0-1280	0-1860
Temperature range (℃)	20-100						
Voltage(V)	220						