科睿机械
— Korui Machinery —

全国统一服务热线
15355877888

- PROFILE
- OUR TEAM
- CULTURE
- PERFORMANCE
- OUR SERVICE

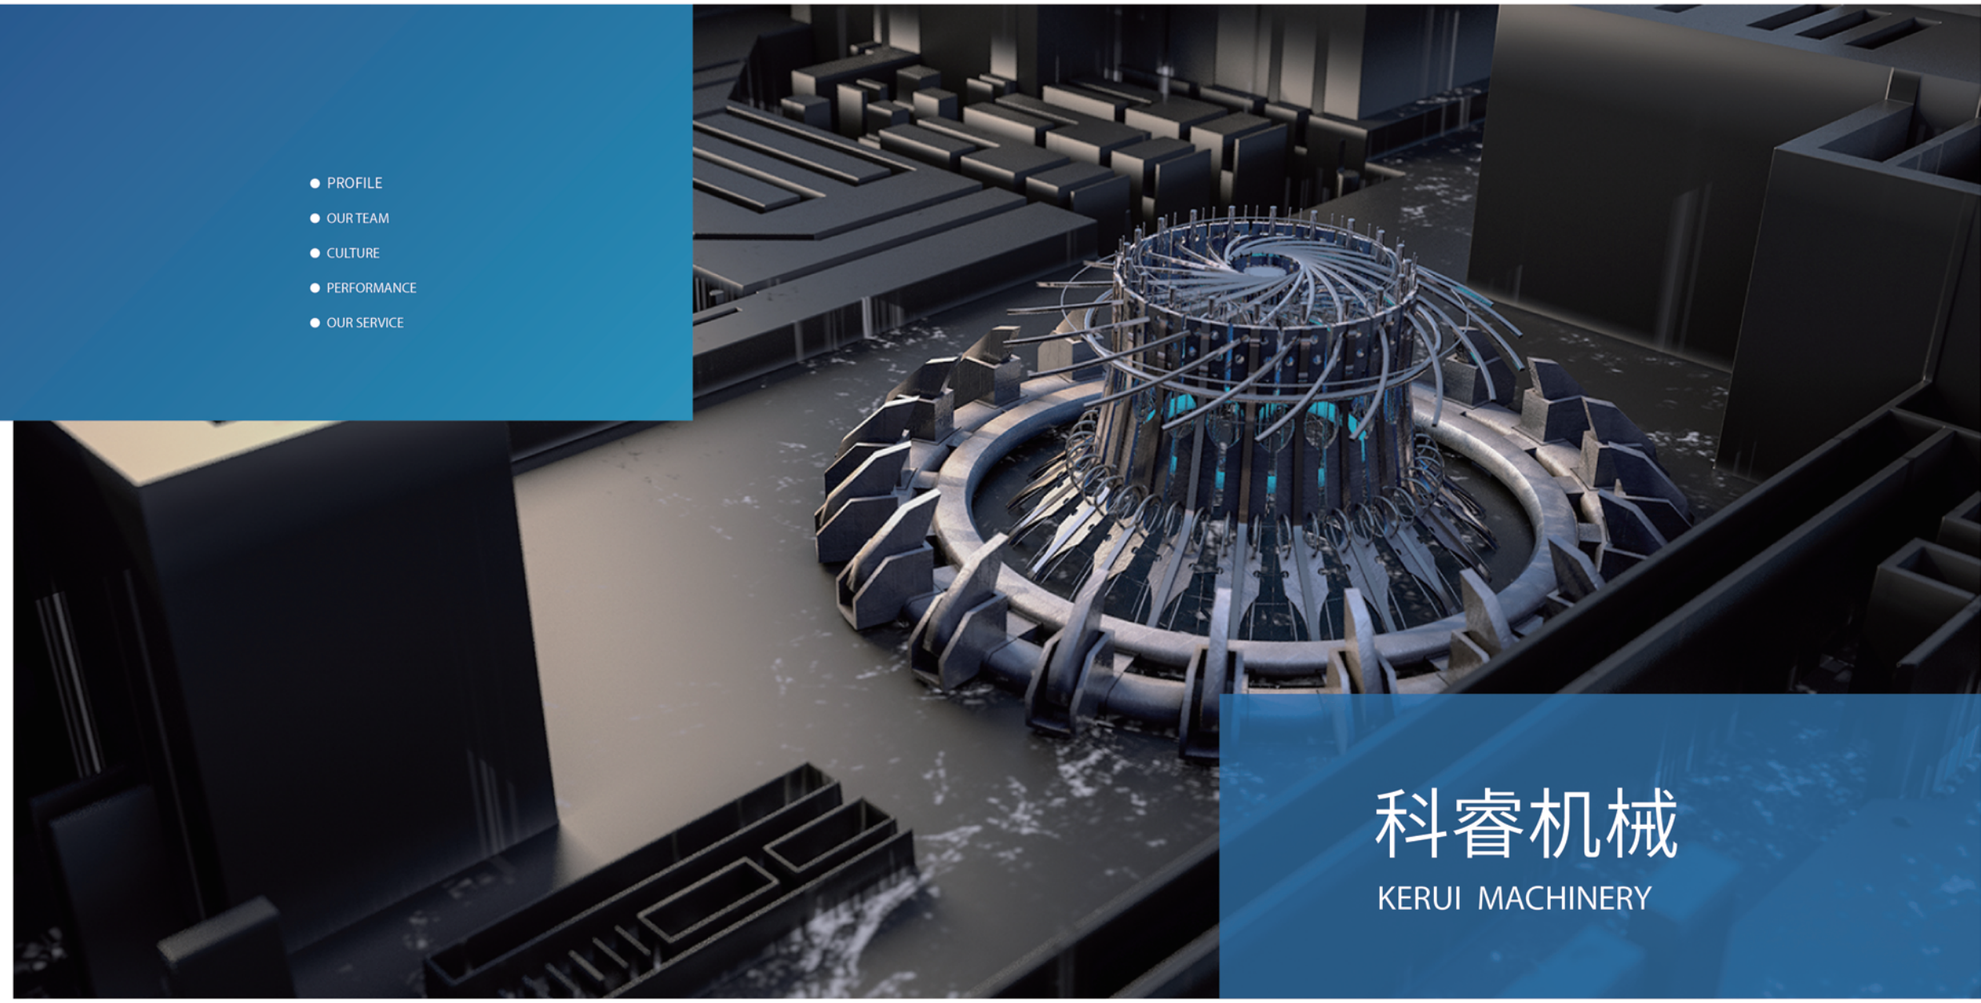

科睿机械
KERUI MACHINERY

瑞安市科睿印刷机械有限公司

CONTACT US

Telephone
15355877888

E-mail:
13646565768
@163.com

QQ Message
383915868

浙江省温州市瑞安市东山街道
鸿创园 2 幢402、404 室

HIGH QUALITY/MADE IN CHINA

高质量/中国造

本公司有权保留对机器技术参数的修改，恕不另行通知。
The company reserves the right to modify the technical parameters of the machine without further notice.

目录
Contents

01 营销网络 Sales Network

02 关于我们 About Us

04 **TBJ-470** 贴版机 TBJ-470 Plate Mounter

05 **TBJ-2000** 贴版机 TBJ-2000 Plate Mounter

06 **TBJ** 系列贴版机 TJB Series Plate Mounter

07 **XBJ** 系列洗版机 XBJ Series Plate Washing Machine

08 **SC** 系列双水槽超声波清洗机 SC Series Two Tanks Ultrasonic Cleaning Machine

09 **ZX** 系列网纹辊超声波清洗机 ZX Series Anilox Ultrasonic Cleaning Mounter

10 **WD** 系列曝光除粘机 WD Series Exposure and Stickness Removing Mach

11 **WD** 系列洗版烘干机 WD Series Washing and Drying Machine

12 **WD** 系列柔性版制版机 WD Series Flexo Plate Processing Machine

13 **WD** 系列树脂版制版机 WD Series Resin Plate Processing Machine

14 **FJ** 系列复卷机 FJ Series Rewinding Machine

16 **MQ** 系列数码模切机 MQ Series Digital die-cutting machine

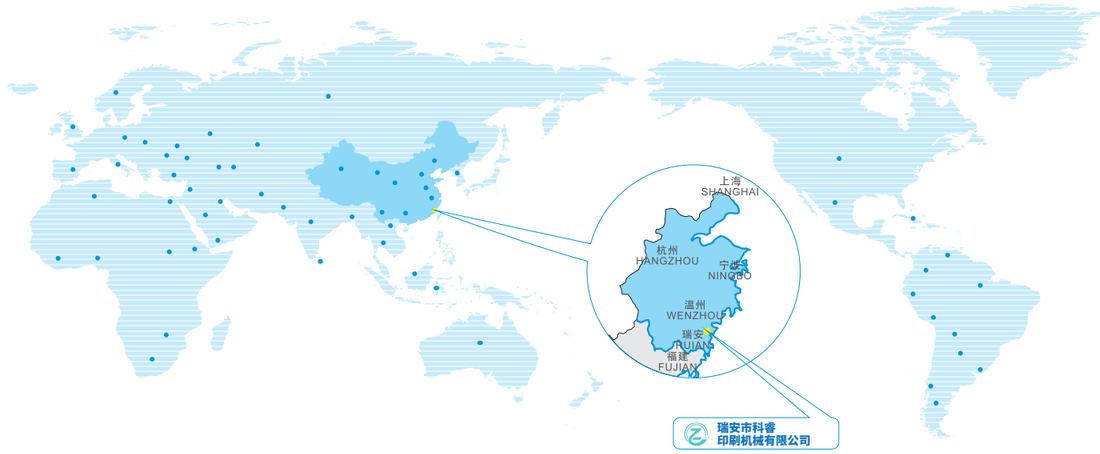

营销网络
Sales Network

销售源自于每一步踏实厚重的足迹，主动再主动是我们高质量服务的关键

科睿企业以优质的服务在全国和国外地区赢得了广大客户，为了更有效更快捷地为客户服务，我们将付出我们最大的努力！

Sale is derived from each sureness track, initiative and initiative is a key for ou high quality service .

We conciliate a mount of customers by our high quality. We will do our best for supplying more fast and more efficiency service.

关于我们

About us

瑞安市科睿印刷机械有限公司位于浙江省温州市瑞安市。公司主要产品为：树脂版制版机、柔版制版机、洗版机、网纹辊清洗机、凹版版辊清洗机、贴版机、数码模切机、上料机、复卷机。

公司自成立以来，通过不断加强研发队伍建设和加大资金投入，全力打造企业硬件设施高起点、高标准建设，夯实内部管理基础，使公司产品结构、质量性能都得到快速提升。

公司将秉承“团结奋进，务实创新”的企业文化理念，在立足印刷配套设备生产主业的同时不断深化内部产品结构，开辟铸造　　新领域，实现企业转型发展、科学发展，并坚持以精良的品质，完善的服务，不断巩固、提升产品在市场上的占有率、满意率，向着客户利益最大化目标迈进！

Rui'an Kerui Printing Machinery Co., Ltd. is located in Rui'an City, Wenzhou City, Zhejiang Province. The main products of the company are: resin plate making machine, flexographic plate making machine, plate washing machine, anilox roller cleaning machine, gravure roller cleaning machine, plate mounting machine, digital die cutting machine, feeding machine, rewinder.

Since its establishment, the company has continuously strengthened the construction of research and development teams and increased capital investment, striving to create a high starting point and high standard construction of enterprise hardware facilities, and consolidating the internal management foundation, so that the company's product structure and quality performance have been rapidly improved.

The company will adhere to the corporate culture concept of "unity and innovation, pragmatism and innovation", constantly deepen the internal product structure while focusing on the main business of printing equipment production, open up new fields of casting, achieve enterprise transformation and development, scientific development, and adhere to excellent quality and perfect service, constantly consolidate and improve the market share and satisfaction rate of products, moving towards the goal of maximizing customer benefits!

TBJ-470贴版机
TBJ-470 Plate Mounter

产品性能：

1、高强度整体加工墙板构造机架结构，工作稳定性好，经久耐用；
2、650线彩色高清摄像机，最高可达70倍放大倍率，图像清晰，分辨率高，大幅度提高了贴版精度；
3、显微相机机构升降采用了蜗杆减速电机驱动控制，大大方便了贴版作业操作；
4、平台6方向调节机构，贴版调整无死角；
5、滚动式贴版，方便操作；
6、19寸高分辨液晶显示器，图像清晰艳丽，有效缓解操作工人的视觉疲劳；

Product Performance:

. The whole strong structure provides great stability and durable in use;
. The 650-line color high-definition camera can reach 70 times amplification ratio;
1 present clear images; possess high resolution ratio; greatly improve the precision of
2 mounting plate;
. The lifting of microscopic camera is controlled by the gear motor for conveniently mounting plate;
3. Six adjusters to perfectly mount and adjust plate;
. Easily mounting plate in rolling way;
4. The 19-inch high-resolution liquid crystal display provides clear and bright images and
5 effectively alleviates the visual fatigue of operating workers.
6

主要技术参数/Specifications:

型号 Model	最大版辊长度（mm）	最大版辊周长（mm）	设备尺寸 L（mm）	设备尺寸 W（mm）	设备尺寸 H（mm）	重量（kg）
TBJ-470	580	600	1100	880	1500	230

注：可以按照客户需要的尺寸定做机型 Note: Special orders with special size accepted

TBJ-2500贴版机
TBJ-2500 Plate Mounter

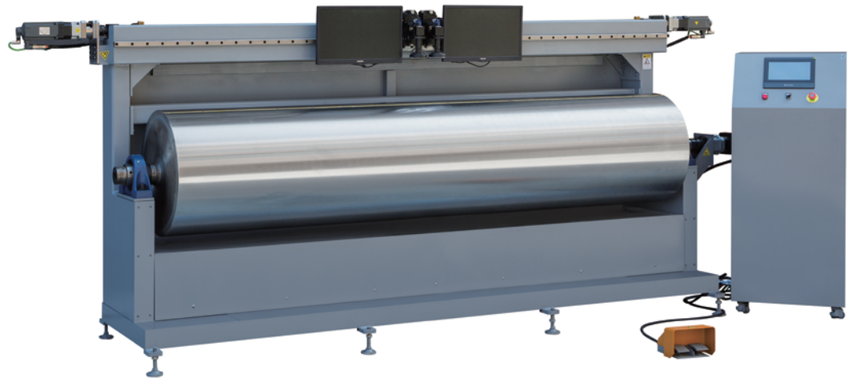

产品性能：

1、显微相机左右移动采用台湾TBI精密直线导轨、西门子伺服电机。
2、版辊正反转采用西门子伺服电机驱动、定位。
3、采用台湾敏通相机、台湾利明减速机、西门子PLC。
4、贴完印版后可以直接检查贴版精度，保证贴版质量。
5、液晶触摸屏控制，操作方便。
6、高强度整体加工墙板构造机架结构，工作稳定性好，经久耐用；
7、650线彩色高清摄像机，最高可达70倍放大倍率，图像清晰，分辨率高，大幅度提高了贴版精度
8、19寸高分辨液晶显示器，图像清晰艳丽，有效缓解操作工人的视觉疲劳；
；

Product Performance:

1. Applying precision linear guide of Taiwan TBI and motor of Siemens Servo to move the cameras right and left.
2. Using motor of Siemens Servo to drive and position the printing roller/ cylinder.
3. Adopting Taiwan cameras and gear motor, PLC of Siemens.
4. After mounting the plate, you can check the accuracy of it.
5. Liquid crystal touchable display to easily control and operate.
6. The whole strong structure provides great stability and durable in use;
7. The 650-line color high-definition camera can reach 70 times amplification ratio; present clear images; possess high resolution ratio; greatly improve the precision of mounting plate;
8. The 19-inch high-resolution liquid crystal display provides clear and bright images and effectively alleviates the visual fatigue of operating workers.

主要技术参数/Specifications:

型号 Model	最大版辊长度（mm）	最大版辊周长（mm）	设备尺寸 L（mm）	设备尺寸 W（mm）	设备尺寸 H（mm）	重量（kg）
TBJ-2500	2500	1000	3550	1850	1350	850

注：可以按照客户需要的尺寸定做机型 Note: Special orders with special size accepted

TBJ系列贴版机
TBJ Series Plate Mounter

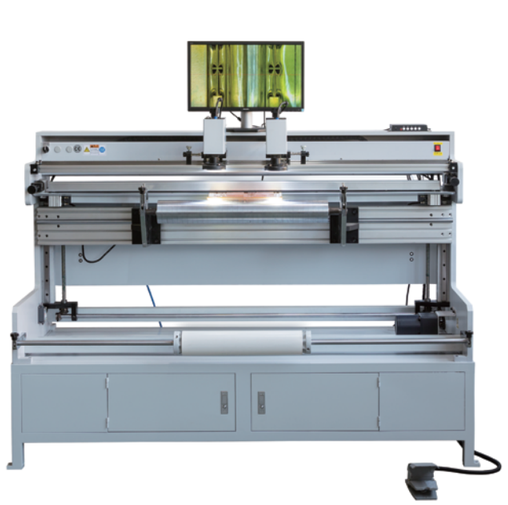

Product Performance:
1. The rack construction with the wallboard structure after high-strength holistic processing has great working stability and is durable in use;
2. The 650-line color high-definition camera can reach 70-times amplification ratio, present clear images, possess high resolution ratio, and substantially improve the precision of the plate;
3. The lifting of plate roller structure adopts the gear motor drive control, which largely facilitates the operations of the plate;
4. The complete machine adopts the centralized control of circuits, which is convenient for operations and has relatively high degree of automation;
5. The 19-inch high-resolution liquid crystal display provides clear and bright images and effectively alleviates the visual fatigue of operating workers.

产品性能：
1、高强度整体加工墙板构造机架结构，工作稳定性好，经久耐用；
2、650线彩色高清摄像机，最高可达70倍放大倍率，图像清晰，分辨率高，大幅度提高了贴版精度；
3、版辊机构升降采用了减速电机驱动控制，大大方便了贴版作业操　；
4、整机采用集中电路控制，操作方便，具有较高的自动化程度；作
5、19寸高分辨液晶显示器，图像清晰艳丽，有效缓解操作工人的视觉疲劳；

主要技术参数/Specifications:

型号 Model	最大版辊长度（mm）	最大版辊周长（mm）	设备尺寸 L（mm）	设备尺寸 W（mm）	设备尺寸 H（mm）	重量（kg）
TBJ-320	320	800	920	600	1650	230
TBJ-650	650	800	1050	600	1650	270
TBJ-1000	1000	1200	1500	600	1650	330
TBJ-1200	1200	1200	1700	600	1650	370
TBJ-1300	1300	1200	1800	700	1650	420
TBJ-1500	1500	1200	2100	700	1650	450
TBJ-1800	1800	1200	2400	700	1650	500

注：可以按照客户需要的尺寸定做机型 Note: Special orders with special size accepted

XBJ系列洗版机
XBJ Series Plate Washing Machine

产品性能：
1、全自动洗版机旨在以温和的方式清洗凸版印刷中的印版，使它们100 %清洁干燥，可立即使用。
2、手动清洗很容易损坏印版。并且，从健康和安全的角度来看，该方式耗时较多且经常会出现问题。操作员的主要精力应该投入在印刷过程和印刷准备上。
3、可用于清洗所有类型的油墨，是专为环保清洗而设计的。
4、该机器由不锈钢外壳制成，更显高档。经久耐用。
5、印刷作业完成后，所有印版都被放在传送带上，传送带会自动将印版带入整个清洗过程。
6、洗涤和漂洗系列提供自动的两阶段清洗过程，第一阶段是清洗液清洗，第二阶段是清水漂洗。
7、液体带有循环过滤功能
8、特殊制造的柔软毛刷和专用清洁液的独特组合，确保了高效且温和的印版清洗过程。
9、清水冲洗将去除最终的油墨残留物和清洗液。
10、热风吹干后，印版可达到100%清洁、干燥的效果，并可立即重复使用。整个过程只需要几分钟。

Product Performance:
1. The quick and gentle cleaning process is fully automatic and leaves the plates 100% clean and dry within very short time.
2. Manual cleaning is easy to damage the printing plate. From a health and safety perspective, this approach is time-consuming and often problematic. The operator's main energy should be devoted to the printing process and printing preparation.
3. All types of ink are possible,and this machine is designed for environmentally friendly cleaning.
4. The machine is made of stainless steel casing, which is more high-grade and durable.
5. After the printing operation is complete,all the printing plates are placed on the conveyor belt, and the printing plate is automatically brought into the whole cleaning process.
6. The washing and rinsing series provides an automatic two-stage cleaning process. The first stage is liquid cleaning and the second stage is rinsing with water.
7. The liquid is provided with a circulating filtration function.
8. The unique combination of a specially manufactured soft brush and a special cleaning solution ensures an efficient and gentle plate cleaning process.
9. Water will remove the ink residue and cleaning fluid.
10. After hot air drying,the plate can be 100% clean and dry,and can be reused immediately. The whole process only takes a few minutes.

主要技术参数/Specifications:

型号	Model	XBJ-450	XBJ-650	XBJ-1050	XBJ-1350
最大版长	Max Plate Length	450mm	650mm	1050mm	1350mm
机器外形尺	Machine Dimension	2350X1100X1150mm	3370X1350X1150mm	3900X1500X1150mm	5050X1920X1150mm
电压	Voltage	220v	220v	220v	220v

注：可以按照客户需要的尺寸定做机型 Note: Special orders with special size accepted

SC系列双水槽超声波清洗机
SC Series Two Tanks Ultrasonic Cleaning Machine

Product Performance:
1. All stainless steel casing, more high-grade and durable
2. The machine casing is made of AIS304 stainless steel with a thickness of 2mm
3. The machine sink uses AIS316 stainless steel with a thickness of 2.5mm
3. 40Khz is stable and reliable, it can clean thorough, high-power cleaning effect is remarkable, which can be observed with naked eye
4. You can customize different sizes of washing machines
5. Equipped with roller rotating wheel, adjustable height casters and compressed air nozzle
6. Equipped with heating and constant temperature system, exhaust air exhaust interface
7. Waterproof performance is greatly improved, and the product is durable and safe.
8. Use tap water plus a small amount of professional solvent as cleaning solution
9. Cleaning fluid filtration cycle device
10. No. 1 sink uses cleaning solution, ultrasonic is used to clean anilox roller
11. No. 2 sink uses tap water to clean the anilox roller
12. Equipped with shower on the machine, tap water circulation device
13. Applicable to shaft anilox roller, sleeve anilox roller, Mark Andy anilox roller, Kiddoo anilox roller, gravure roller
14. This professional cleaning anilox roller equipment has multiple functions, it is affordable, safe, effective, and easy to operate.

产品性能：
1、全不锈钢外壳，更显高档，经久耐用
2、机器外壳使用AIS304不锈钢，厚度2mm
3、机器水槽使用AIS316不锈钢，厚度2.5mm
4、40Khz稳定可靠，清洁彻底，大功率清洗效果显著，可用肉眼观察到
5、可以度身定制不同尺寸的清洗机
6、附有滚筒旋转轮，活动可调节高度脚轮，压缩空气喷头
7、带有加热配恒温系统，废气排风接口
8、防水性能大大改进，产品持久安全
9、使用自来水加少量专业溶剂做为清洗液
10、清洗液过滤循环装置
11、1号水槽使用清洗液，超声波清洗网纹辊
12、2号水槽使用自来水冲洗网纹辊
13、机器上带有花洒，自来水循环装置
14、适用有轴网纹辊、套筒网纹辊、麦安迪网纹辊、基杜网纹辊、凹版版辊
15、经济实惠，安全有效，操作简单，集多种功能于一体的专业清洗网纹辊设备。

主要技术参数/Specifications:

型号 Model	镇子数量（只）	超声波功率（W）	超声波频率（khz）	加热功率（W）	水槽长度（mm）	控温范围（℃）	电源（v）
SC-650	18	1080	40	1000	650	20-80	220
SC-1000	30	1800	40	2000	1000	20-80	220
SC-1500	48	2880	40	3000	1500	20-80	220
SC-2000	60	3600	40	3000	2000	20-80	220
SC-2500	75	4500	40	3000	2500	20-80	220

注：可以按照客户需要的尺寸定做机型
Note: Special orders with special size accepted

ZX系列网纹辊超声波清洗机
ZX Series Anilox Ultrasonic Cleaning Mounter

Product Performance:
1. Economical and practical cleaning equipment with multiple remarkable functions.
2. Small and exquisite, easy to operate.
3. Safe and effective cleaning anilox roller.
4. Suspension type of design, exchangeable and optional between single frequency and double frequency.
   Single frequency: 40 KHz, stabilized and reliable, cleaning thoroughly.
   Multiple frequencies – after removing stubborn dirt with low frequency, you can clean highly precisely.
5. Customized cleansers of different sizes can be available.
6. Equipped with roller swiveling wheel.
7. Equipped with heating and constant temperature system.
8. The waterproof function has been largely improved, which makes the product durable and safe.
9. Stainless steel shell, making the product more graceful and durable in use.
10. The cleaning fluid can be made with tap water and a bit of special solvent.
11. High-power cleaning effect is so significant that can be visible with naked eyes.

产品性能：
1、经济实惠，但却拥有很多卓越功能的清洗设备。
2、体积小巧，并且容易操作。
3、安全、有效的清洗网纹辊。
4、40Khz稳定可靠，清洁彻底。
5、也可以度身定制不同尺寸的清洗机。
6、附有滚筒旋转轮
7、带有加热配恒温系统
8、防水性能大大改进，产品持久安全
9、全不锈钢外壳，更显高档。经久耐用。
10、使用自来水加少量专业溶剂做为清洗液
11、大功率清洗效果显著，可用肉眼观察到

主要技术参数/Specifications:

型号 Model	镇子数量（只）	超声波功率（W）	超声波频率（khz）	加热功率（W）	单次清洗网纹辊条数(条)	网纹辊长度（mm）	控温范围（℃）	电源（v）
ZX-320	16	960	40	1000	2	0-350	20-100	220
ZX-450	18	1080	40	1000	2	0-450	20-100	220
ZX-650	24	1440	40	1000	2	0-660	20-100	220
ZX-850	27	1620	40	2000	2	0-860	20-100	220
ZX-1000	33	1980	40	2000	2	0-1030	20-100	220
ZX-1200	39	2340	40	2000	2	0-1230	20-100	220
ZX-1300	42	2520	40	2000	2	0-1360	20-100	220
ZX-1500	48	2880	40	3000	2	0-1560	20-100	220
ZX-1800	60	3600	40	3000	2	0-1860	20-100	220

注：可以按照客户需要的尺寸定做机型 Note: Special orders with special size accepted

WD系列曝光除粘机
WD Series Exposure and Stickness Removing Machine

产品性能：

1、整机全不锈钢外壳、经久耐用。
2、进口原装PHILIPS专用晒版灯，PHILIPS镇流器
3、去粘采用进口PHILIPS专用UVC光源。
4、独特电器分离结构，防臭氧腐蚀
5、电动升降式上盖，方便制版作业
6、（日本东洋纺）漫反射紫外线抽气膜。
7、整机集曝光部分和除粘部分于一体

Product Performance:

1. The entire machine adopts stainless steel shell, reliable and durable.
2. Philips lamps, Philip rectifiers
3. Philips UVC lights source to remove stickness of plate
4. Unique electrical separation structure, in order to avoid ozone corrosion
5. Automatic lift of upper lid makes the plate processing easily.
6. Japan Toyo vacuum sheet which reflects ultraviolet ray.
7. Equipped the functions of exposure and stickness removing

主要技术参数/Specifications:

型号 Model	晒版面积 Printer area	机型尺寸（宽x深x高） Measurement:wxdxh	功率 Power	重量（kg） Weight
WD-1280	1200x800mm	1370x1010x850mm	2.3kw	330
WD-1210	1200x1000mm	1370x1210x850mm	2.6kw	365
WD-1590	1500x900mm	1730x1150x850mm	3.0kw	400
WD-1612	1600x1200mm	1890x1460x900mm	4.2kw	495
WD-2012	2000x1200mm	2320x1450x950mm	5.5kw	707

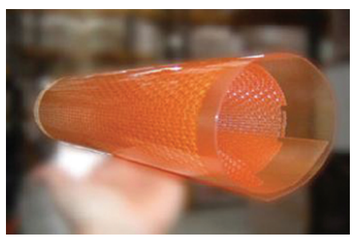

注：可以按照客户需要的尺寸定做机型
Note: Special orders with special size accepted

WD系列洗版烘干机
WD Series Washing and Drying Machine

产品性能：

1、整机全不锈钢外壳，集洗版和双层烘干于一体
2、洗版平整，方便实用
3、烘干及时，干燥均匀
4、采用美国进口的数字集成温度传感器。
5、电动升降式上盖，方便制版作业

Product Performance:

1. The whole machine adopts stainless steel shell, integrates washing and drying into one machine;
2. Smooth washing , convenient and practical;
3. Timely drying, uniform drying
4. American digital integrated thermo sensor.
5. Automatic lift of upper lid makes the plate processing easily.

主要技术参数/Specifications:

型号 Model	晒版面积 Printer area	机型尺寸（宽x深x高） Measurement:wxdxh	功率 Power	重量（kg） Weight
WD-1280	1200x800mm	1370x1010x850mm	3.3kw	390
WD-1210	1200x1000mm	1370x1210x850mm	3.5kw	420
WD-1590	1500x900mm	1730x1150x850mm	4.7kw	457
WD-1610	1600x1000mm	1890x1260x900mm	4.9kw	525
WD-2012	2000x1200mm	2320x1450x950mm	6.7kw	737

注：可以按照客户需要的尺寸定做机型
Note: Special orders with special size accepted

WD系列柔性版制版机
WD Series Flexo Plate Processing Machine

性能特点：

1、整机全不锈钢外壳、经久耐用。
2、进口原装PHILIPS专用晒版灯，PHILIPS镇流器（变频式对制版非常有利）。
3、（日本东洋纺）漫反射紫外线抽气膜。
4、全自动控制，使用方便。
5、采用美国进口的数字集成温度传感器。
6、全自动洗版机构。恒温烘干，贯流风机吹力强、烘干快。
7、去粘采用进口PHILIPS专用UVC光源。
8、集曝光、洗版、烘干、去粘于一体，是制柔版的理想设备。
9、可选配电动升降式上盖。

Characteristics:

1. The entire machine adopts stainless steel shell, reliable and durable.
2. Philips lamps, Philip rectifiers(frequency transforming type is good for plate processing).
3. Japan Toyo vacuum sheet which reflects ultraviolet ray.
4. Computer controller enables it to be easily operated.
5. American digital integrated thermo sensor.
6. Automatically plate washing system, constant dry, strong wind and quick dry.
7. Philips UVC lights source to remove stickness of plate.
8. Equipped the functions of exposure, wash, dry and stickness removing, a good equipment for processing flexo plates.
9. Automatic lift of upper lid

主要技术参数/Specifications:

型号 Model	晒版面积 Printer area	机型尺寸(宽x深x高) Measurement:wxdxh	功率 Power
WD-400	430x320mm	710x610x1050mm	2.2kw
WD-600	600x400mm	860x710x1050mm	2.3kw
WD-800	800x600mm	1090x910x1150mm	3.5kw
WD-900	900x600mm	1190x910x1150mm	3.7kw
WD-1000	1000x600mm	1290x910x1150mm	3.8kw
WD-1200	1200x600mm	1490x910x1190mm	3.9kw
WD-1209	1200x900mm	1490x1210x1190mm	4.1kw
WD-1210	1200x1000mm	1490x1310x1190mm	4.2kw

注：可以按照客户需要的尺寸定做机型
Note: Special orders with special size accepted

WD系列树脂版制版机
WD Series Resin Plate Processing Machine

性能特点：

1、整机全不锈钢外壳、经久耐用。
2、进口原装PHILIPS专用晒版灯，PHILIPS镇流器（变频式对制版非常有利）。
3、（日本东洋纺）漫反射紫外线抽气膜。
4、全自动控制，使用方便。
5、采用美国进口的数字集成温度传感器。
6、全自动洗版机构。
7、恒温烘干，贯流风机吹力强、烘干快。
8、集曝光、洗版、烘干于一体，是制树脂版版的理想设备。

Characteristics:

1. The entire machine adopts stainless steel shell, reliable and durable.
2. Philips lamps, Philip rectifiers(frequency transforming type is good for plate processing).
3. Japan Toyo vacuum sheet which reflects ultraviolet ray.
4. Computer controller enables it to be easily operated.
5. American digital integrated thermo sensorr.
6. Automatically plate washing system
7. Constant dry, strong wind and quick dry.
8. Equipped the functions of exposure, wash, and dry, a good equipment for processing resin plates.

主要技术参数/Specifications:

型号 Model	晒版面积 Printer area	机型尺寸(宽x深x高) Measurement:wxdxh	功率 Power
WD-A4	430x255mm	710x550x1050mm	2.2kw
WD-400	430x300mm	710x600x1050mm	2.3kw
WD-600	600x400mm	860x710x1050mm	2.6kw
WD-800	800x600mm	1090x910x1150mm	3.5kw
WD-900	900x600mm	1190x910x1150mm	3.7kw
WD-1000	1000x600mm	1290x910x1150mm	3.9kw

注：可以按照客户需要的尺寸定做机型
Note: Special orders with special size accepted

FJ系列复卷机
FJ Series Rewinding Machine

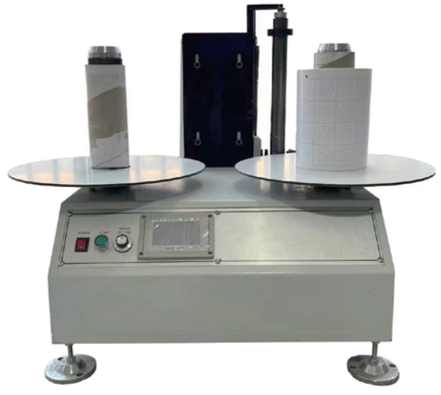

机台特点：

1.机身采用静电喷涂--烤漆，耐溶剂。

2.采用品牌电机/减速机，数显调速器，无级变速，保障机台运转稳定。

3.采用计米感应器，可以设定米数到达自动停机。

4.采用变频器，启停/加减速度更精准稳定。

5.收/放卷轴采用气胀轴。

6.采用磁粉张力，张力大小可调节。

7.使用寿命长，主要用于各类塑料卷材倒卷。

8.顺时针旋转调节开关，由低速慢慢提高到所需速度。

1. The fuselage adopts electrostatic spraying-baking paint, which is solvent-resistant.
2. Adopt brand motor/reducer, digital display governor, stepless speed change to ensure stable operation of the machine.
3. Using the meter sensor, you can set the number of meters to automatically stop.
4. Using frequency converter, start-stop/acceleration/deceleration is more accurate and stable.
5. The rewinding/unwinding reel adopts an inflatable shaft.
6. Using magnetic powder tension, the tension can be adjusted.
7. Long service life, mainly used for rewinding various types of plastic coils.
8. Rotate the adjustment switch clockwise to slowly increase from low speed to desired speed.

技术参数：

机器名称	自动复卷机		
机台型号	FJ-450A		FJ-450B
最大收/放卷直径	mm	450	450
收/放卷轴直径	In	3	3
收/放卷轴高	mm	300	350
速 度	m/min	10-40	10-40
最大承重	kg	20	30
功 率	w	120	120
电 源	v	220	220
重 量	kg	60	60
机器尺寸	mm	L640*W450*H680	L640*W550*H680

FQ-900系列传真纸、收银纸分切机
FQ-900 Fax Paper and Cashier Paper Cutting Machine

主要结构及配置

(一)、放卷部分

1、结构：有轴式气动上料，磁粉制动器制动。放卷张力控制调节在人机界面上调节，能达到自动张力控制。纠偏系统用于跟踪材料。
2、规格：(1)、最大放卷宽度：865mm
(2)、最大放卷直径：Φ1000mm
(3)、最大载重量：1000kg
3、配置：(1)、放卷锁紧轴：Φ3"气胀轴 1条
(2)、磁粉制动器20公斤 1只 (国产)

(二)、主机部分

结构：本机由放卷、过渡、牵引、分切、打标、排废、收卷及电气控制等部份组成。

1、牵引部分

牵引部份由牵引铝辊、压纸胶辊、压臂及气缸装置组成。两辊之间压力大小可由精密调压阀调节。
(1)、牵引电机2.2kw 1只 (上海)
(2)、变频器控制器 1只 (长沙贝士德)
(3)、PLC 1只 (松下)
(4)、触摸屏 1只 (台湾威伦)
(5)、计数器在人机界面上操控，用于对分切材料的长度计量。

2、分切部分

切刀部分由上圆刀，下圆刀及调节装置组成。上圆刀位置可按下圆刀刃口位置任意调整而不需要拆卸，下圆刀轴由底刀与刀垫组合拼装式(按分切宽度拼装)
(1)、排废电机0.75kw 1只
(2)、分切圆刀规格：上刀Φ85mm，下刀Φ60mm (15套)

3、收卷部分

收卷部份由收卷轴、割纸装置、回纸装置、自动插纸装置及工作平台组成。采用三辊包容式表面中心卷取方式，割纸装置、回纸装、自动插纸装置能提高接纸速度，免除了分切纸与纸管的粘贴问题。
收卷轴：1/2英寸、8mm轴各2条

4、打标部分

打标部分由打标轮，墨斗等组成，采用自动控制系统设置客户的需求米数，通过气动的方式使打标轮与纸张接触，完成打标后，打标轮自动下放，使打标轮与纸张隔离。

5、其它

1、过渡导辊：硬质铝合金，表面硬质氧化处理(国产)；
2、轴承：国产正品轴承；
3、传动采用三角带、链条传动；步进皮带；
4、主要电器元件如开关、按钮、交流接触器、热继电器等选用国产名优产品。5. 主传动系统工件进行热处理；
6、设备颜色：乳白色或需方指定颜色
7. 橡胶牵引棍启用河北春风国优产品

6、配置清单：

(1)、牵引电机2.2kw 1只 (上海)
(2)、变频器控制器 1只 (长沙贝士德)
(3)、PLC 1只 (松下)
(4)、触摸屏 1只 (台湾威伦)
(5) 精密调压阀 1只 (进口)
(6) 磁粉制动器20kg 1只 (国产)

MQ系列数码模切机
MQ Series Digital die-cutting machine

数码模切机是一种针对多项用途开发数码模切机，可适用在许多少量多量的产品加工。应付变化多、交货快速，以及图形复杂的需求上，是您得力的帮手。数码模切机，不但可适用模切的用途，也可同时做切割的工作，使用上非常方便，现在已广泛的应用在标签、吊牌、包装制作加工上，相信更多应用可以发展出来，只待您的创造力来发挥它。

Label die-cutting has experienced three kinds of die-cutting technologies traditional die-cutting, digital die-cutting and laser die-cutting Traditional die-cutting technology is mature, fast and widely used, but the short-age of traditional die -cutting machine needs knife template, which is difficult. to adapt to today's rapidly changing social development. With the innovation and application of technology and the continuous improvement of people's living standards, people's quality of life requirements, personalized customization is increasing. In this demand, we have developed a unique flatbed multi-blade digital label die cutting machine after many efforts in many years, whose technology was combined with the characteristics of other industries.

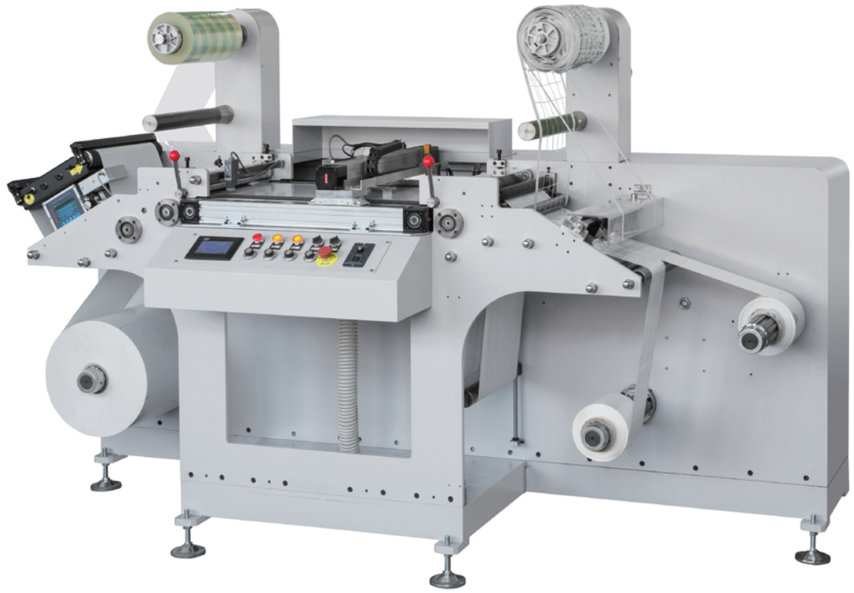

适合加工的材料

不干胶、PP合成等柔性材料。

应用实例

1.机器采用平台式纠偏，只需将材料穿过平台，设置自动模式即可跟踪，同时拥有断纸平台，简单方便。
2.拥有覆膜工位
3.机器配有三个伺服电机，主电机控制材料输送，2个伺服电机控制刀头X轴和Y轴移动。
4.配有吸风机，使材料固定在平台上更加平整。
5.机器配有分切工位
6.放卷配有磁粉制动器，收卷配有磁粉离合器

技术参数：

机器型号	MQ-350
最大输出标签纸卷	外径 500MM
支持标签纸宽度	40-350MM
最大标签宽度	330MM
最小标签长度	10MM
最大标签长度	300MM
模切速度	6-8 米/分钟（根据模切内容）
模切机头数量	2 个（标配）最多 4 个
分切刀数量	4 个（标配）最多 15 个
模切技术	硬质合金旋转切刀
模切精度	0.05MM（重复）
模切定位	手动、黑标单点或双点
分条速度	最大 100M/分钟
分条精度	0.2MM
分条尺寸	10-330MM
尺寸	2400*1200*1600mm
重量	约 800KG
电源	220VAC, 2000 watts
保修服务	一年（整机除易损件外）
选配件	
切刀	
模切机头	