
Y. F. ENTERPRISES

IN ASSOCIATION WITH BHARAT FLAMEPROOF

World Class Flameproof Equipments

YFE

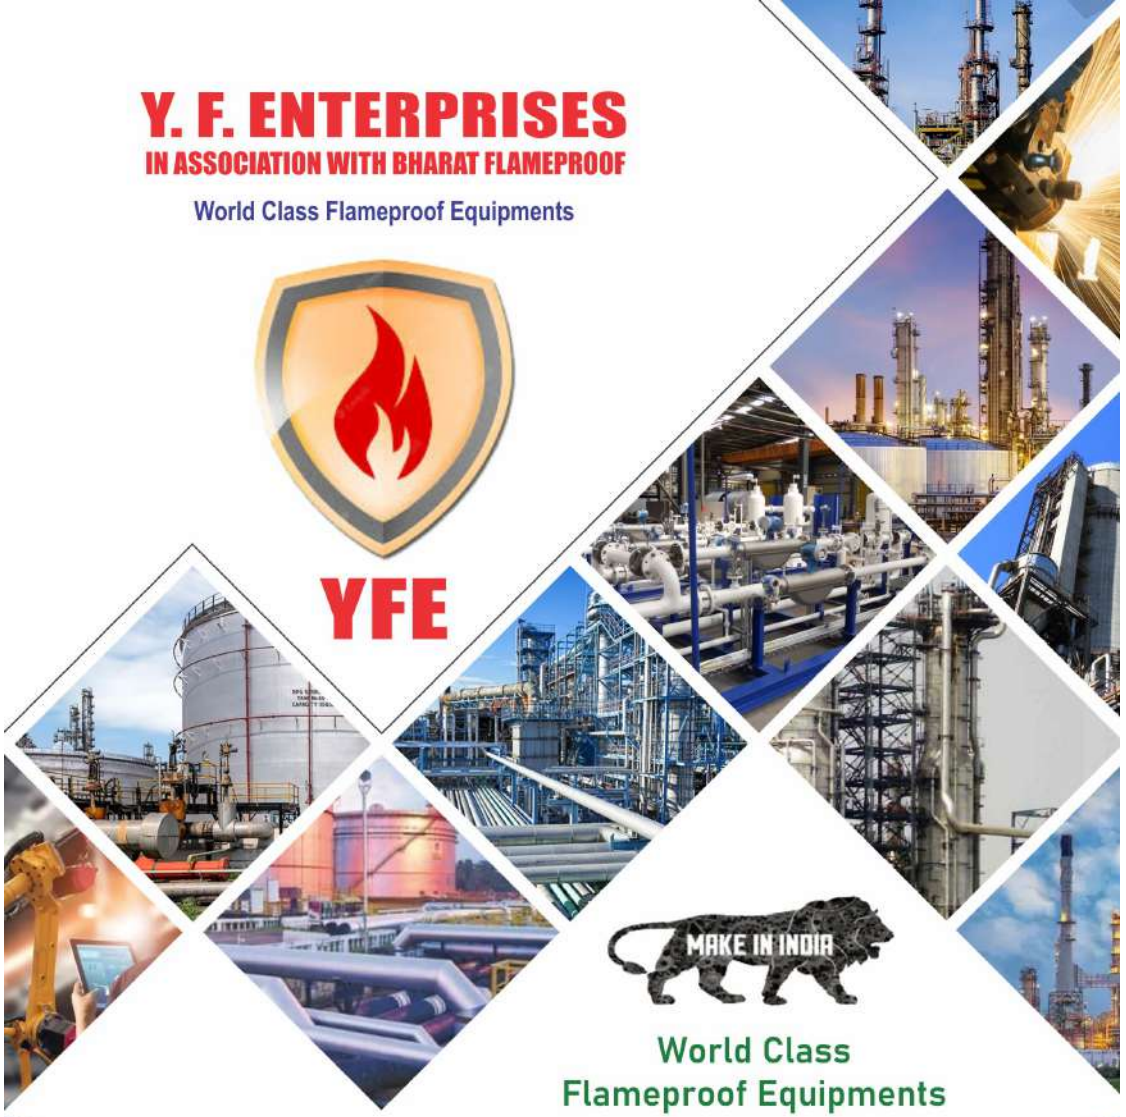

MAKE IN INDIA

World Class
Flameproof Equipments

एन एस आई सी
NSIC

CIMFR

BIS

MSME

VISION

To be a leading & Innovative company in the field of renewable energy sources and Lightning Solutions.

MISSION

To provide most eco friendly energy efficient products with reliable in quality, safe to use and at affordable price which makes our customers life simple and comfortable. With our innovative products and solutions we want to contribute to the development of our society.

INDEX

1) LUMINARIES
2) CONTROL STATION
3) JUNCTION BOX
4) PANEL
5) DISTRIBUTION BOARD
6) INSTRUMENTION PANEL
7) CLEAN ROOM APPLICATION
8) FAN
9) ACCESSORIES
10) CUSTOMER SPECIFIED ITEM



FLAMEPROOF FIRE ALARAM/MANUAL CALL POINT



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Red Color
Gasket: Neoprene
Cable Entry: 2 Nos, 3/4"ET Entry

FLAMEPROOF HOOTER WITH FLASHER



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 2 Nos, 3/4"ET Entry.
Noise Level: 120db.

FLAMEPROOF LIMIT SWITCH (ROLLER/LEVER TYPE)



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
GAS GROUP: IIC
Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 1 Nos, 3/4"ET Entry
Limit Switch : 1NO+1NC, 10A 500V

FLAMEPROOF STOP PUSH BUTTON STATION



Type of Protection: Ex-d
Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 2 Nos, 3/4"ET Entry.

FLAMEPROOF PUSH BUTTON STATION R/F/S



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
GAS GROUP: IIA,IIB,IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 2 Nos. 3/4"ET Entry.
Forward PB: Green Colour- NO CONTRACT
Reverse PB: Yellow Colour- NO CONTRACT

FLAMEPROOF START/STOP PUSH BUTTON STATION



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,IIA,IIB,IIC
as per IS/IEC 60079-1:2007
Weatherproof: IP 66 as per IS/IEC 60529:2001
Finish: Light Grey to Shade 631 of IS:5
(Epoxy Powder Coated)
Gasket: Neoprene
Cable Entry: 2 Nos. 3/4"ET Entry.
Start PB: Green Colour, Momentary Type

FLAMEPROOF PUSH BUTTON STATION WITH INDICATION LAMP



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
GAS GROUP: IIA,IIB,IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 2 Nos. 3/4"ET Entry.
Forward PB: Green Colour- NO CONTRACT
Reverse PB: Yellow Colour- NO CONTRACT

FLAMEPROOF ON/OFF ROTARY SWITCH



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,IIA,IIB,IIC
as per IS/IEC 60079-1:2007
Weatherproof: IP 66 as per IS/IEC 60529:2001
Finish: Light Grey to Shade 631 of IS:5
(Epoxy Powder Coated)
Gasket: Neoprene
Cable Entry: 2 Nos, 3/4"ET Entry.
Switch: 16A/32AMP/25AMP DP ON/OFF Rotary Switch

FLAMEPROOF SWITCH SOCKET COMBINE



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
GAS GROUP: IIA,IIB,IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 2 Nos. 3/4"ET Entry.
Switch: 16A/25AMP/32AMP Switch
RATING: 230VOLT/415 VOLT
Pin: 3 PIN (2P+E) 4 PIN (3P+E), 5 PIN (4P+E)

FLAMEPROOF TEMPERATURE INDICATOR



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,IIA,IIB,IIC
as per IS/IEC 60079-1:2007
Weatherproof: IP 66 as per IS/IEC 60529:2001
Finish: Light Grey to Shade 631 of IS:5
(Epoxy Powder Coated)
Gasket: Neoprene
Cable Entry: 2 Nos. 3/4"ET Entry.
RANGE: 0 To 200 DEGREE, 0 TO 400 DEGREE

FLAMEPROOF REACTOR VESSEL LAMP



Type of protection: Ex-d
Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB
Finish: Light Grey to Shade 631
Glass: Heat Resistant Toughened
Cable Entry: 2 Nos. 3/4"ET Entry.

FLAMEPROOF BULK HEAD LIGHT FITTING



Type of protection: Ex-d
Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
Gas Group: IIA, IIB
Finish: Light Grey to Shade 631 of IS:5
Glass: Heat Resistant Toughened Type
Lamp Holder: ES Holder.
Cable Entry: 2 Nos. 3/4"ET Entry.
Lamp Rating: 160W MILL, 125W HPMV, 23W CFL, 20W LED, 40 W LED

FLAMEPROOF CLEAN ROOM FITTING 2 X 36



Type of protection: Ex-d
Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB
Finish: Light Grey to Shade 631
Glass: Heat Resistant Toughened Type-A
lamp Holder: ES Holder
Cable Entry: 2 Nos. 3/4" ET Entry.
Lamp Rating (Integral type: 2 X 36 W PL TUBE, 40W LED, 60W LED SUPPLY 230 V AC

FLAMEPROOF AVIATION LIGHT



Type of protection: Ex-d
Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
Gas Group: IIA, IIB
Finish: Light Grey to Shade 631
Glass: Heat Resistant Toughened Type-A
Cable Entry: 2 Nos. 3/4"ET Entry.

FLAMEPROOF FLOOD LIGHT FITTING



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Glass: Heat Resistant Toughened
lamp Holder: ES Holder.
Cable Entry: 2 Nos. 3/4" ET Entry.
Led Rating: 100W, 120W, 150W, 200W

FLAMEPROOF HAND LAMP



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Glass: Heat Resistant Toughened
lamp Holder: ES Holder.
Cable Entry: 1 Nos. 3/4" ET Entry.
Lamp Rating: 15W CFL, 100W GLS, 10W LED

FLAMEPROOF SUNFLOWER LED LIGHT FITTING



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Glass: Heat Resistant Toughened
Cable Entry: 2 Nos. 3/4" ET Entry.
Lamp Rating (Integral type): 25 W LED, 45 W LED, 55 W LED, 60 W LED.

FLAMEPROOF TOWER LAMP



Type of Protection: Ex-d
Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
GAS GROUP: IIA, IIB
Finish: Light Grey to Shade 631
Glass: Heat Resistant Toughened Type-A
lamp Holder: ES Holder.
Cable Entry: 2 Nos. 3/4" ET Entry.

FLAMEPROOF TUBE LIGHT FITTING



Type of protection: Ex-d
Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
GAS GROUP: IIB, Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene
Glass: Heat Resistant Toughened Type-A
Lamp Holder: Pin type Holder.
Cable Entry: 2 Nos. 3/4" ET Entry.
Lamp Rating 1x40W,1x36W CFL, 1x28W T5, 1X22W LED, 2X40W, 2X36W CFL, 2X28W T5, 2X22W LED

FLAMEPROOF WELL GLASS FITTING DOME TYPE



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
GAS GROUP: IIA, IIB, IIC
Weatherproof: IP 66,
Finish: Light Grey to Shade 631
Gasket: Neoprene, Lamp Holder: ES Holder
Glass: Heat Resistant Toughened Type-A
Cable Entry: 2 Nos. 3/4" ET Entry.
Lamp Rating (Integral type):
160W M LL, 45W CFL, 25W CFL
Lamp Rating (Integral type): 80W HPMV, 125W HPMV, 70W MH, 150MHL
Led rating: 35W, 45W, 55W, 60W
Supply: 230VAC

FLAMEPROOF JUNCTION BOX (GAS GROUP-IIA, IIB) MULTIPLE WAY



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2, Gas group: IIA,IIB
Weatherproof: IP 66, TEMP CLASS: T6
Finish: Light Grey to Shade 631
Gasket: Neoprene,
Cable Entry: as per request
Box size: 300MM X 300MM X 150MM
380MM X 380MM X 150MM
470MM X 470MM X 150MM
760MM X 530MM X 150MM
INNER DEPTH: 150MM, 240MM, 300MM

FLAMEPROOF JUNCTION BOX (GAS GROUP-IIC) MULTIPLE WAY



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
Gas Group: IIA, IIB, IIC
Weatherproof: IP 66,
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: as per cilent request
Box sixe: 175MM X 175MM X 120MM
275MM X 275MM X 150MM
375MM X 375MM X 150MM
500MM X 500MM X 150MM
Inner Depth: 150MM, 200MM, 250MM

FLAMEPROOF ANNUNCIATOR PANEL (4 TO 24 WINDOWS)



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIA,IIB
Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene,
Cable Entry: As Per Customer Request

FLAMEPROOF AUTOMATION CONTROLLER PANEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIA,IIB
Weatherproof: IP 66
Temp Class: T6
Finish: Light Grey to Shade 631
Gasket: Neoprene,
Cable Entry: As Per Customer Request

FLAMEPROOF ANNUNCIATOR PANEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIA,IIB
Temp Class: T6
Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: As Per Customer Request

FLAMEPROOF AUTOMATION CONTROLLER PANEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIA, IIB
Temp Class: T6
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: As Per Customer Request

FLAMEPROOF STAR DELTA STARTER PANNEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIA,IIB
Weatherproof: IP 66
Temp Class: T6
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: As per your requirement

FLAMEPROOF HMI AUTOMATION PANEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIA, IIB
Temp Class: T6
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: As Per Customer Request

FLAMEPROOF MOTOR CONTROL PANEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIB
Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: As per Customer Request
Rating: 3 HP, 5HP, 7.5 HP X 3 Nos
Starter in one panel

FLAMEPROOF PCL PANEL ENCLOSURE



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIB
Temp Class: T6
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
No. of Feeders: As per Customer Request
Cable Entry: As Per Customer Request

FLAMEPROOF VACCUM CONTROL PANEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIB
TEMP CLASS: T6
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
No.of Feeders: As per Customer Request
Cable Entry: As per customer Request

FLAMEPROOF VFD PANEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIB
Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene
No.of Feeders: As per Customer Request
Cable Entry: As per customer Request

FLAMEPROOF 12/18/24/36 WAY LIGHTNING / POWER DISTRIBUTION BOARD



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas group: IIA, IIB, IIC
TEMP CLASS: T6
Weatherproof: IP 66 as per IS/IEC 60529:2001
Finish: Light Grey to Shade 631
Gasket: Neoprene

FLAMEPROOF TEMP CONTROLLER



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas group: IIA,IIB,IIC
Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 3 Nos.3/4" ET Entry.

FLAMEPROOF INSTRUMENT ENCLOSURE



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas group: IIB, IIC
Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene
cable Entry: As per Customer Request

FLAMEPROOF DOL STARTER



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas group: IIA,IIB,IIC
Weatherproof: IP 65
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 3 Nos.3/4" ET Entry.

FLAMEPROOF CLEAN ROOM PUSH BUTTON STATION ON / OFF



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2, IIA,IIB, IIC as per IS/IEC 60079-1:2007
Weatherproof: IP 66 as per IS/IEC 60529:2001
Finish: Light Grey to Shade 631 of IS:5 (Epoxy Powder Coated)
Gasket: Neoprene
cable Entry: 2 Nos. 3/4" ET Entry.
Start PB: Green Colour, Momentary Type

FLAMEPROOF CLEAN ROOM ROTARY SWITCH



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas group: IIA,IIB,IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631 of IS:5 (Epoxy Powder Coated)
Gasket: Neoprene
Cable Entry: 2 Nos.3/4" ET Entry.
Switch: 16A/25A/32A DP ON/OFF Rotary Switch

FLAMEPROOF CLEAN ROOM BULK HEAD LIGHT FITTING



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas group: IIA,IIB
Finish: Light Grey to Shade 631 of IS:5
Finish: Light Grey to shade 631 of IS:5
Glass: Heat Resistant Toughened Type
Gasket: Neoprene
Cable Entry: 2 Nos. 3/4" ET Entry.
Start PB: Green Colour, Momentary Type

FLAMEPROOF CLEAN ROOM SWITCH SOCKET COMBINE



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas group: IIA,IIB,IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoprene
Cable Entry: 2 Nos.3/4" ET Entry.
Switch: 16A/25AMP/32AMP Switch
Rating: 230Volt/ 415 Volt
Pin: 3 Pin (2P+E) 4 Pin (3P+E), 5 Pin (4P+E)
Box : Stainless Steel Cover Plate/MS Box

FLAMEPROOF EXHAUST FAN



Material: Cast Aluminium Alloy LM6
Flameproof: IIB
Weatherproof: IP 55
Finish: Light Grey to Shade 631
Size: 12" to 36"
Motor Rating: 240 / 415 Volts AC.
RPM: 1440 RPM, 50Hz

FLAMEPROOF PEDESTAL FAN



certification Code: Exd, IIA and IIB

Zone: 1 & 2

Protection: Ip66

Temperature Classification: T6

FLAMEPROOF WALL MOUNTED FAN



Material: 1 & 2
Gas group: IIA, IIB, IIC
Temp Class: T6
Fan Size: 16Inch, 18Inch, 24Inch
rating: 230V AC, 415V AC
Motor RPM: 1440
HP: 0.25 HP, 0.50HP

FLAMEPROOF DOUBLE COMPRESSION CABLE GLAND/ DUMMY PLUG/ PVC RUBBER HOOD



Material: MS, Brass and Stainless Steel
Flameproof: Zone 1 & 2
Gas group: IIB
Weatherproof: IP 66
Size: 3/4" to 3"BSC Thread ½' to 2 ½' ' NPT

FLAMEPROOF DIRECT ENTRY CONTROL STATION



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
Gas Group: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Light Grey to shade 631
Gasket: Neoprene
Cable Entry: 4Nos. 3/4" ET Entry.

FLAMEPROOF CAMERA HOUSING



Resolution: 1000TVL, 1MP, 1.3MP, 2MP, 3MP
Vision: Day Night
Lens: Fixed Type-6mm/8mm/12mm/16mm
Meter Range: 30mtr/40mtr/50mtr/80mtr
Voltage Supply: 12V DC, Classification: Zone1 and Zone 2
Gas Group: I,IIA,IIB,IIC
Temperature Classification: T6
IP Protection: Ip66
Cable Entry: 02 Nos for M20(3/4"ET)
Hardware: Stainless Steel

FLAMEPROOF CLOCK DIGITAL



Gas Group: IIA, IIB, Zone: 1 & 2
Temperature Classification: T6,
Color: Siemens Gray
Material: Die Cast Aluminium
Type: Stand Alone & Master / Slave
Display: 4 Inch Red FND
Time Format: Hours & Minute with Battery Backup
Operating Voltage 230 VAC, Frequency 50Hz
Enclosure Approved By CMRI Dhanbad
Enclosure Size 510 (W) *300(H) *140(D) mm
Display Window Size 385 (W) *215(H) mm

FLAMEPROOF DOOR INTERLOCKING SYSTEM



Material: Cast Aluminium Alloy Lm6
Flameproof: Zone 1 & 2,
Gas Group: IIA, IIB
Finish: Light Grey to shade 631
gasket: Neoprene
Cable Entry: 2 Nos. M16" ET Entry.

FLAMEPROOF GAS DETECTOR ENCLOSURE



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas Group: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Light Grey to Shade 631
Gasket: Neoperene
Cable Entry: 4 Nos. 3/4" ET Entry

FLAMEPROOF HEATER ENCLOSURE



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2,
Gas Group: IIA, IIB, IIC
Weatherproof: IP 66
Finish: Light Grey to shade 631
Gasket: Neoprene
Cable Entry: 2 Nos. 3/4" ET Entry.

FLAMEPROOF M SHAPE TUBULAR HEATER PANEL



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas Group: IIA, IIB
Finish: Light Grey to shade 631
Cable Entry: As Per Requirement

FLAMEPROOF MAGNET



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas Group: IIA, IIB
Finish: Light Grey to shade 631
Gasket: Neoprene
Operating Voltage: 12VDC
Current Draw: 500mA
Holding force: upto 600lbs
Cable Entry: M12-1 NOS

FLAMEPROOF PASS BOX



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
Gas Group: IIA, IIB
Finish: Light Grey to shade 631
Gasket: Neoprene
Cable class: t6

FLAMEPROOF THERMOCOUPLE HEADS/ SENSOR



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas Group: IIA, IIB
Finish: Light Grey to shade 631
Gasket: Neoprene
Cable Entry: 1 Nos. 3/4" ET Entry

FLAMEPROOF UV TUBE LIGHT FITTING



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
Gas Group: IIB
Weatherproof: IP 65
Finish: Light Grey to shade 631
Gasket: Neoprene
Glass: Heat Resistant Toughened Type-A
Cable Entry: 1 Nos. 3/4" ET Entry.
Size: 1 foot/2 foot

FLAMEPROOF WEIGHING SCALE UNIT



Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas Group: IIA, IIB
Finish: Light Grey to shade 631
Gasket: Neoprene
Cable Entry: 4 Nos. 3/4" ET Entry

FLAMEPROOF JUNCTION BOX 2/3/4 WAY



Material: Cast Aluminium Alloy LM6.
Flameproof: Zone 1 & 2,
Gas Group: IIB
Weatherproof: IP 65
Finish: Light Grey to shade 631
Gasket: Neoprene
Glass: Heat Resistant Toughened Type-A
Cable Entry: 1 Nos. 3/4" ET Entry.
Size: 1 foot/2foot

FLAMEPROOF EMERGENCY EXIT LIGHT FITTING



Type of protection- Ex-d
Material: Cast Aluminium Alloy LM6
Flameproof: Zone 1 & 2
Gas Group: IIA, IIB, IIC
Light Specification- Maintained
1.5hrs Backup
5 W LED
Ni-Mh, Ni-Cd Rechargeable Battery
10 to 12 hrs Recharging Period
Constant Voltage Charger

Y.F.ENTERPRISES

51D, SHAMSUL HUDA ROAD, KOLKATA - 700 017
State : West Bengal
District : Kolkata

yfenterprises9@gmail.com/info@yfenterprises.in

9748413152 / 8240505520