


CN LAB WEEK 8 1BM21CS203


DEMONSTRATE THE TTL / LIFE OF A PACKET


Topology:

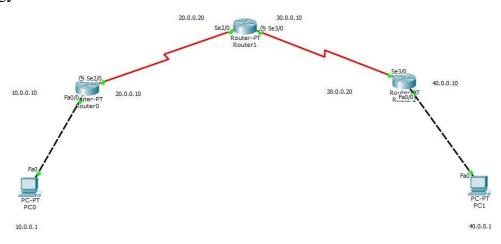

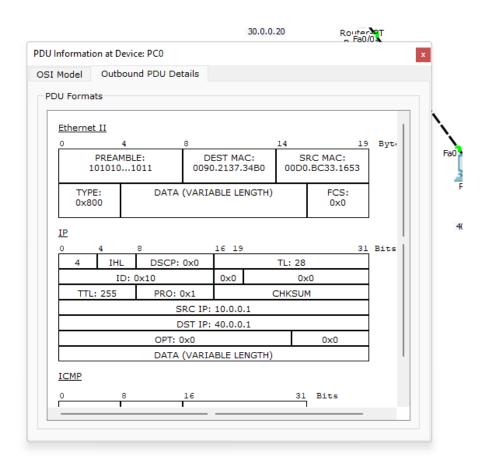


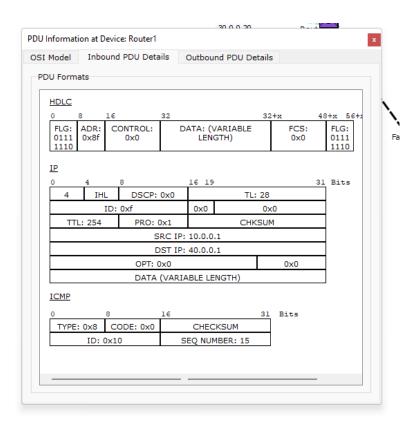


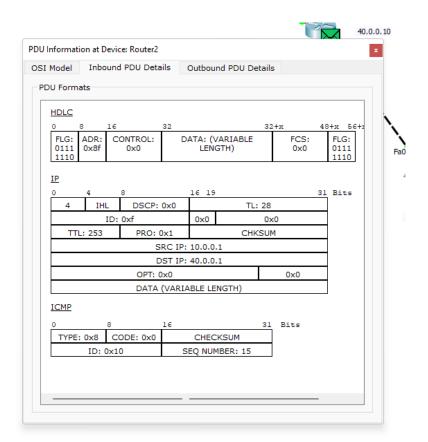

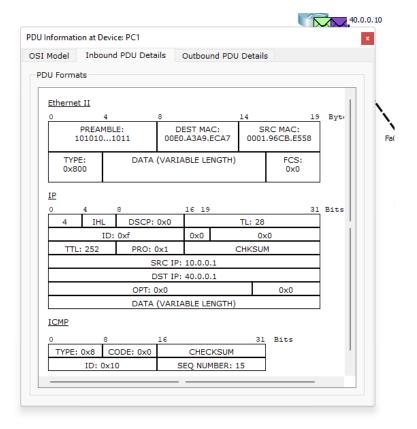

TO CONSTRUCT A WLAN AND MAKE NODES COMMUNICATE WIRELESSLY

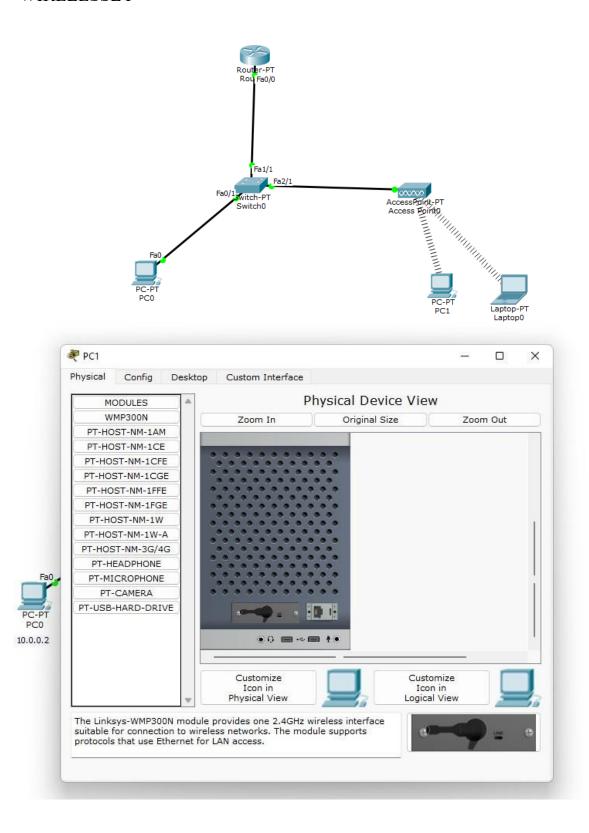

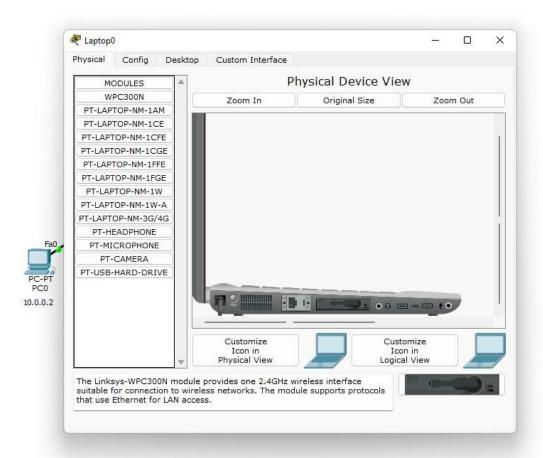

```
PCI

Physical Config Desktop Custom Interface

Command Prompt

X

Packet Tracer PC Command Line 1.0
PC>
Packet Tracer PC Command Line 1.0
PC>ping 10.0.0.4

Pinging 10.0.0.4 with 32 bytes of data:

Reply from 10.0.0.4: bytes=32 time=31ms TTL=128
Reply from 10.0.0.4: bytes=32 time=13ms TTL=128
Reply from 10.0.0.4: bytes=32 time=13ms TTL=128
Reply from 10.0.0.4: bytes=32 time=12ms TTL=128
Reply from 10.0.0.4: bytes=32 time=12ms TTL=128
Reply from 10.0.0.4: bytes=32 time=12ms TTL=128
PC-I
PCI Ping statistics for 10.0.0.4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds:
Minimum = 12ms, Maximum = 31ms, Average = 18ms
PC>
```