WEEK 3 CN LAB-ROUTER

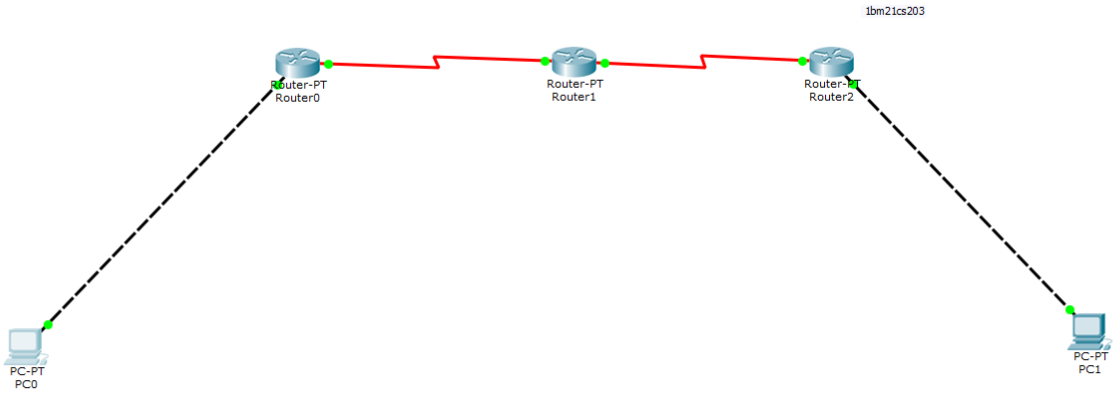

Configuring routers:

Router0

Physical | Config | CLI

IOS Command Line Interface

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface fastEthernet0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to
up
exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface serail 2/0
                         ^
% Invalid input detected at '^' marker.

Router(config)#interface serial 2/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#exit
```

Copy | Paste

Router1

Physical | Config | CLI

IOS Command Line Interface

```
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
exit
Router(config)#exit
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface serial 3/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface serial3/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
```

Copy | Paste

Router2

Physical | Config | CLI

IOS Command Line Interface

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface serial2/0
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
exit
Router(config)#e
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
xit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface fastEthernet0/0
Router(config-if)#ip address 40.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to
up
exit
Router(config)#exit
```

Copy | Paste

OUTPUTS:

```
PC>ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: bytes=32 time=1ms TTL=255
Reply from 10.0.0.1: bytes=32 time=0ms TTL=255
Reply from 10.0.0.1: bytes=32 time=0ms TTL=255
Reply from 10.0.0.1: bytes=32 time=0ms TTL=255

Ping statistics for 10.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

PC>ping 20.0.0.1

Pinging 20.0.0.1 with 32 bytes of data:

Reply from 20.0.0.1: bytes=32 time=0ms TTL=255
Reply from 20.0.0.1: bytes=32 time=2ms TTL=255
Reply from 20.0.0.1: bytes=32 time=0ms TTL=255
Reply from 20.0.0.1: bytes=32 time=1ms TTL=255

Ping statistics for 20.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 2ms, Average = 0ms
```

When router doesn't know about ip address of other routers:

Command Prompt

```
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

PC>ping 30.0.0.1

Pinging 30.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Request timed out.
Reply from 10.0.0.1: Destination host unreachable.

Ping statistics for 30.0.0.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

PC>ping 30.0.0.2

Pinging 30.0.0.2 with 32 bytes of data:

Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.

Ping statistics for 30.0.0.2:
```

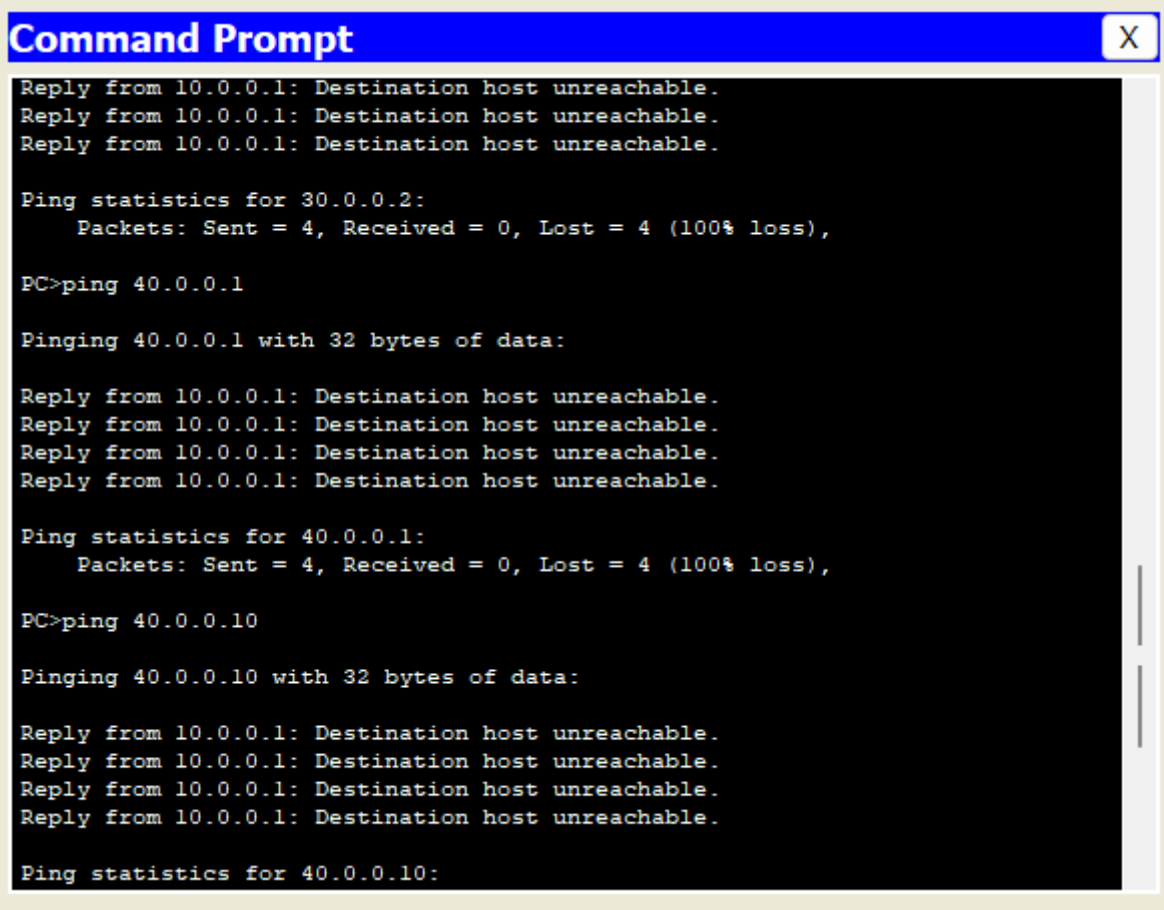

Configuring ip routes:

Router 0:

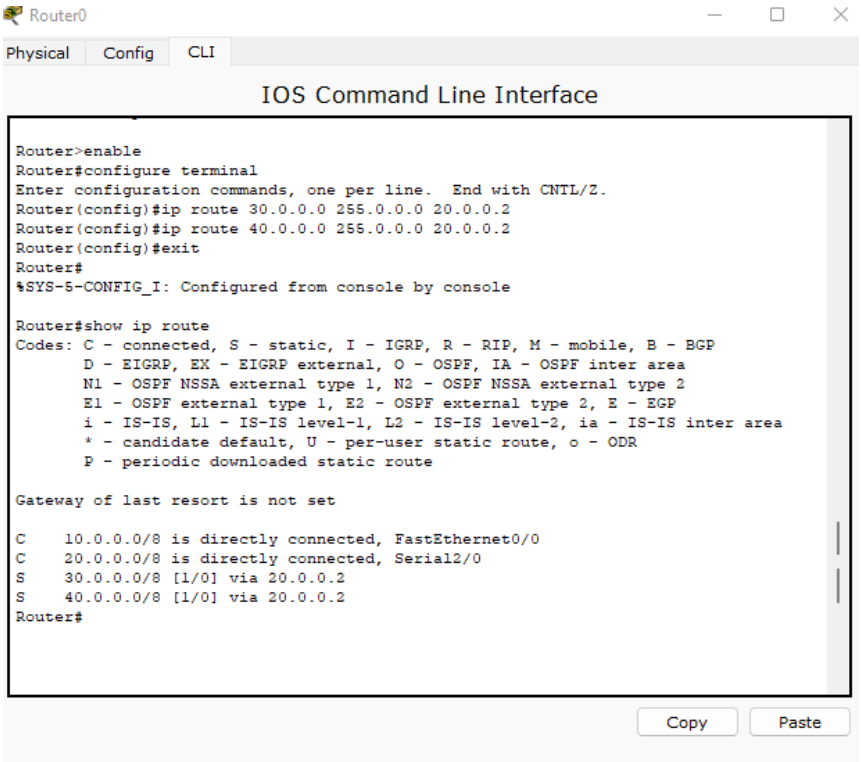

Router 1:

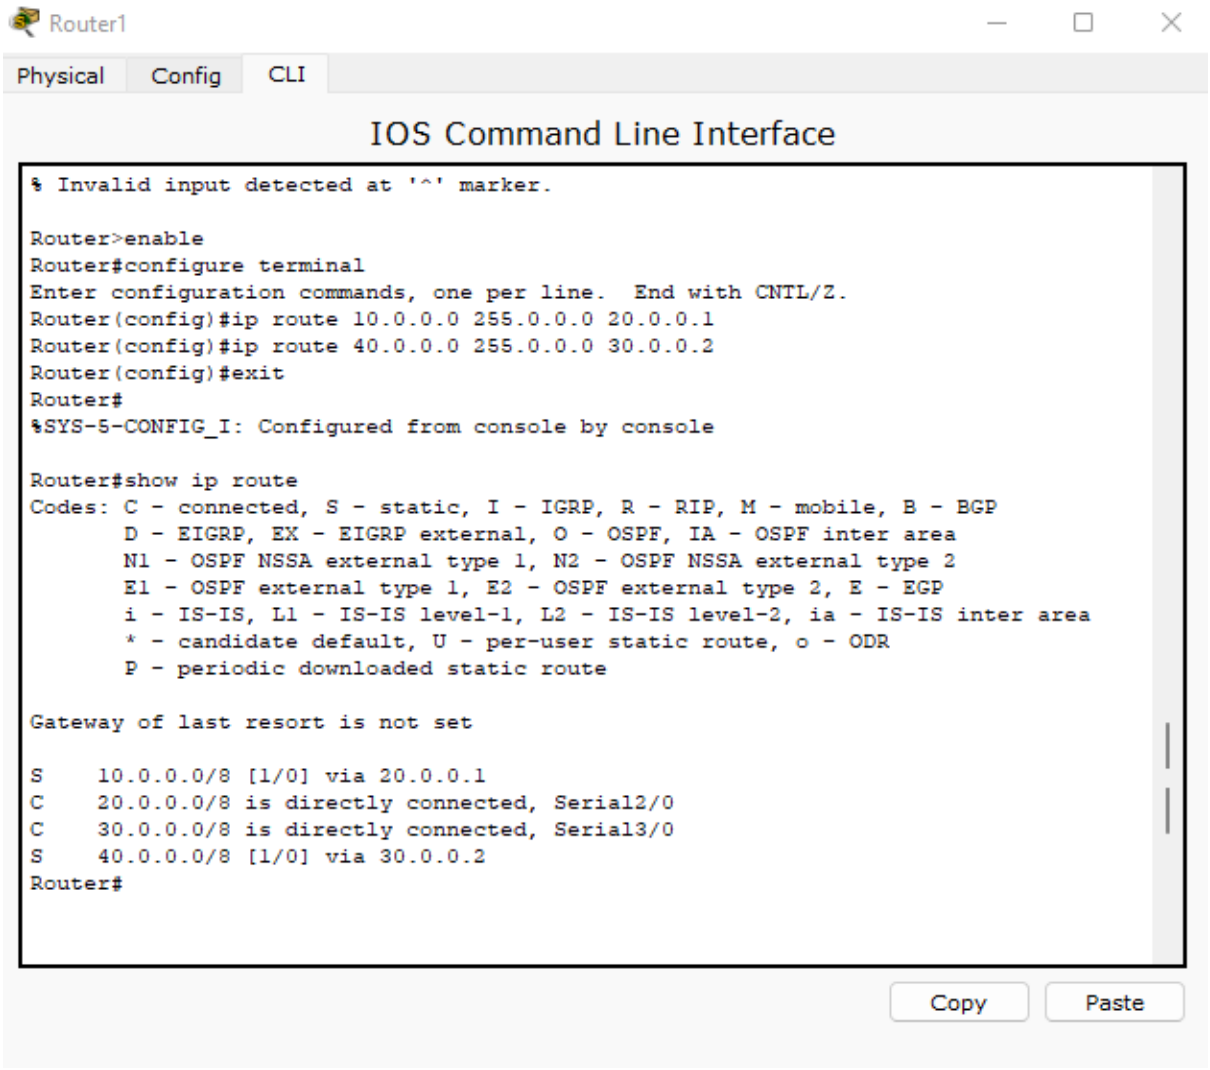

Router 2:

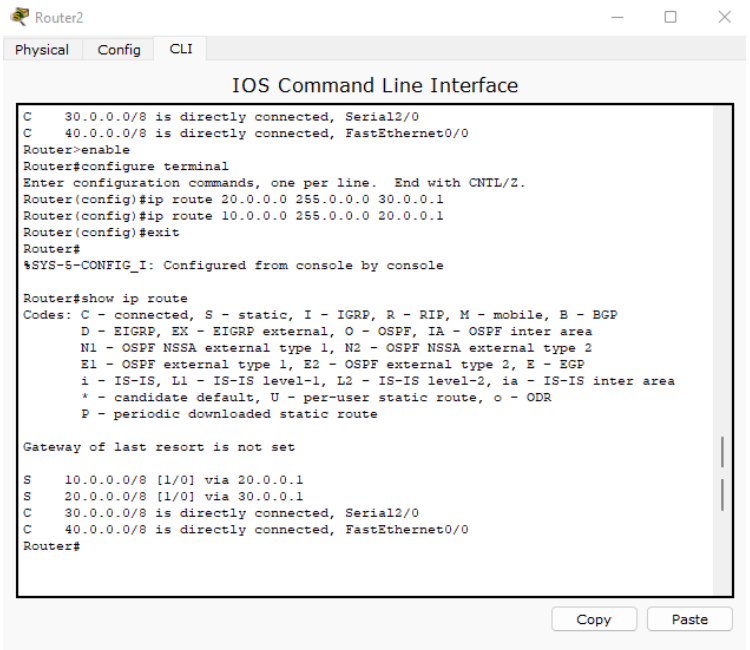

After configuring ip routes for all routers:

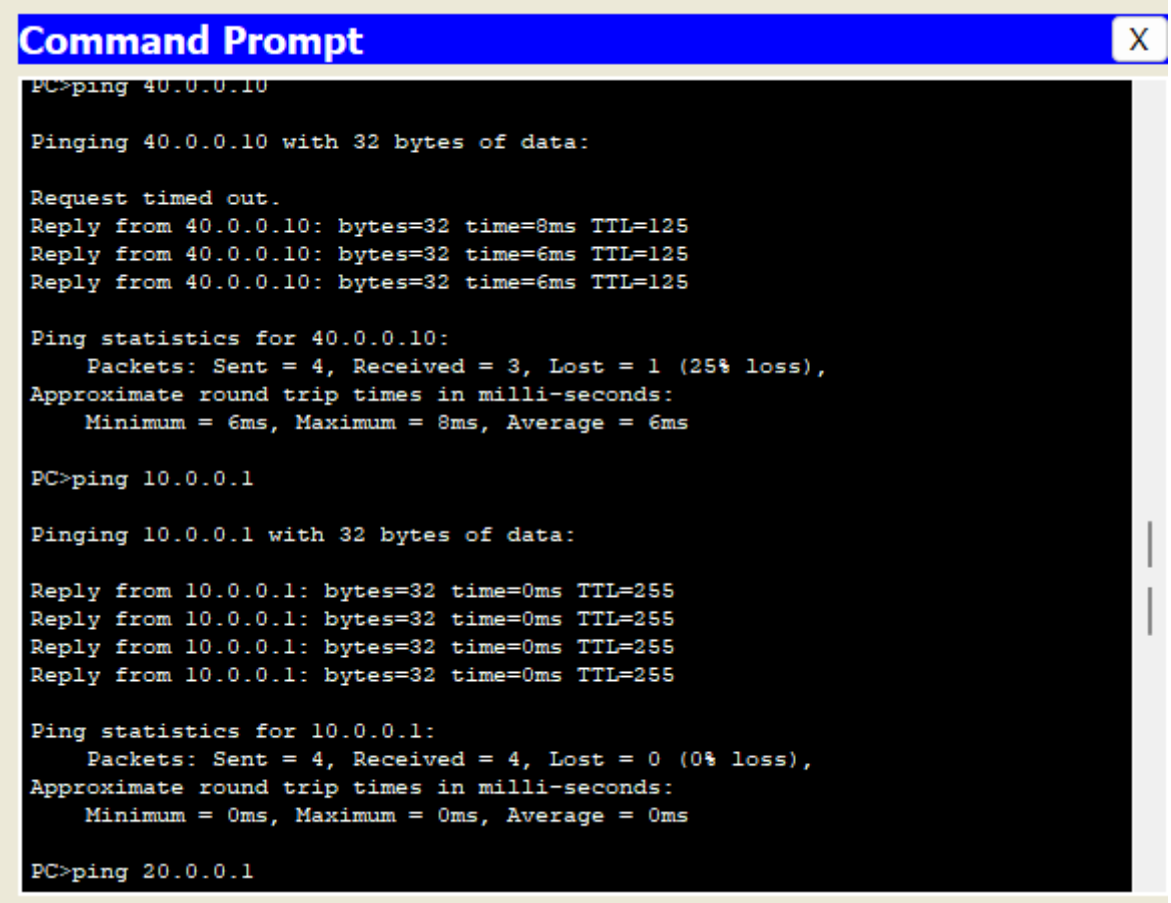

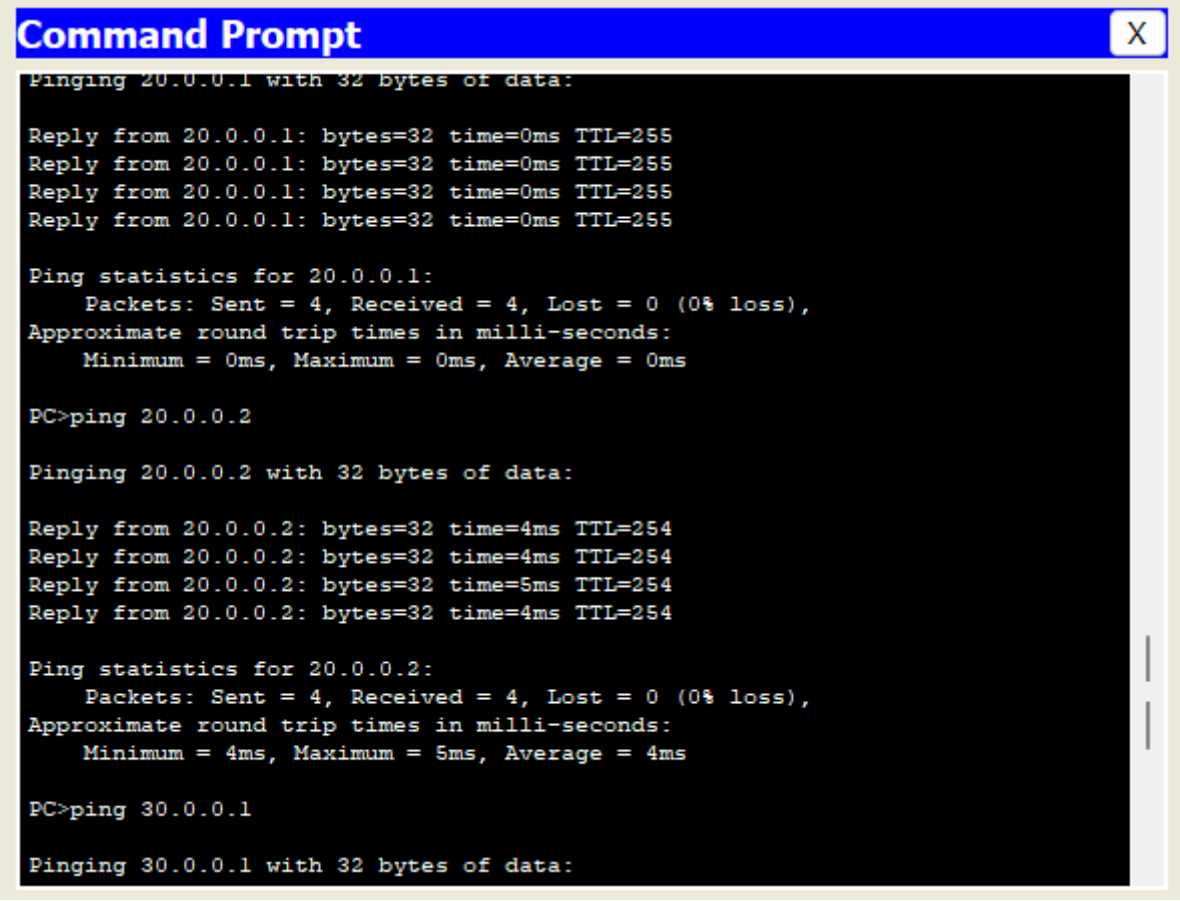
Command Prompt
X
Pinging 20.0.0.1 with 32 bytes of data:
Reply from 20.0.0.1: bytes=32 time=0ms TTL=255
Reply from 20.0.0.1: bytes=32 time=0ms TTL=255
Reply from 20.0.0.1: bytes=32 time=0ms TTL=255
Reply from 20.0.0.1: bytes=32 time=0ms TTL=255
Ping statistics for 20.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC>ping 20.0.0.2
Pinging 20.0.0.2 with 32 bytes of data:
Reply from 20.0.0.2: bytes=32 time=4ms TTL=254
Reply from 20.0.0.2: bytes=32 time=4ms TTL=254
Reply from 20.0.0.2: bytes=32 time=5ms TTL=254
Reply from 20.0.0.2: bytes=32 time=4ms TTL=254
Ping statistics for 20.0.0.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 4ms, Maximum = 5ms, Average = 4ms
PC>ping 30.0.0.1
Pinging 30.0.0.1 with 32 bytes of data:

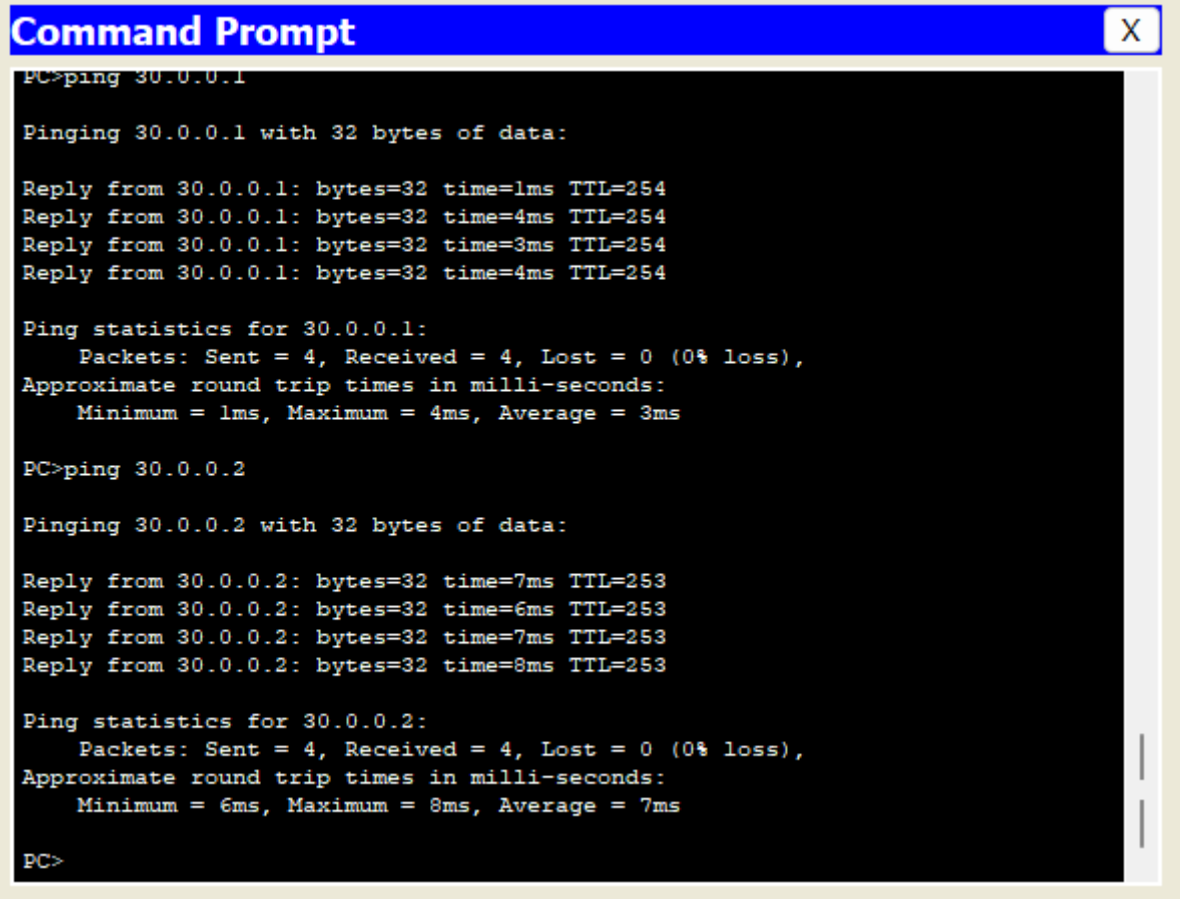
Command Prompt
X
PC>ping 30.0.0.1
Pinging 30.0.0.1 with 32 bytes of data:
Reply from 30.0.0.1: bytes=32 time=1ms TTL=254
Reply from 30.0.0.1: bytes=32 time=4ms TTL=254
Reply from 30.0.0.1: bytes=32 time=3ms TTL=254
Reply from 30.0.0.1: bytes=32 time=4ms TTL=254
Ping statistics for 30.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 4ms, Average = 3ms
PC>ping 30.0.0.2
Pinging 30.0.0.2 with 32 bytes of data:
Reply from 30.0.0.2: bytes=32 time=7ms TTL=253
Reply from 30.0.0.2: bytes=32 time=6ms TTL=253
Reply from 30.0.0.2: bytes=32 time=7ms TTL=253
Reply from 30.0.0.2: bytes=32 time=8ms TTL=253
Ping statistics for 30.0.0.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 6ms, Maximum = 8ms, Average = 7ms
PC>

Outcome:

Pinging before default gateway: Request timed out message. After setting default gateway: Destination host unreachable since ip route between routers is not yet set. After setting ip route between routers, we get successful replies for all ping commands.