
Indoor localization using Local Positioning Systems.

MSc.

By

SHIVAN RAMDHANIE



Department of Engineering Mathematics
UNIVERSITY OF BRISTOL & UNIVERSITY OF THE WEST OF ENGLAND

A dissertation submitted to the University of Bristol in accordance with the requirements of the degree of MASTER OF SCIENCE in the Faculty of Engineering.

SEPTEMBER 2020

Word count: TBD

ABSTRACT

Here goes the abstract

DEDICATION AND ACKNOWLEDGEMENTS

Here goes the dedication.

AUTHOR'S DECLARATION

I declare that the work in this dissertation was carried out in accordance with the requirements of the University's Regulations and Code of Practice for Research Degree Programmes and that it has not been submitted for any other academic award. Except where indicated by specific reference in the text, the work is the candidate's own work. Work done in collaboration with, or with the assistance of, others, is indicated as such. Any views expressed in the dissertation are those of the author.

SIGNED: DATE:

TABLE OF CONTENTS

	Page
List of Tables	ix
List of Figures	xi
1 Introduction	1
2 Aims & Objectives	5
3 Background Research	7
A Appendix A	9
Bibliography	11

LIST OF TABLES

TABLE	Page
-------	------

LIST OF FIGURES

FIGURE	Page
1.1 The typical setup for an autonomous UAV.	2

INTRODUCTION

In recent years Unmanned aerial vehicle(UAV) usages has grown exponentially becoming common in industry and households Custers (2016). A major part of UAV applications is their ability to localise themselves in the given environment with acceptable precision and accuracy. This is a common requirement in any robotic system but UAV's are often limited by strict payload requirements and therefore have to rely on sensors that are lightweight and robust. (Mendoza-Mendoza et al. 2020) gives a good summary of physical components that are used in various vehicles but a UAV system, specifically, a quadrotor system cab be summarised as follows:

- Rotor build - This section contains parts that should be researched based on the size and physical requirements of the drone. These include: brushless motors, electronic speed controllers, frame size.
- Flight controller unit(FCU) - This acts as the mother board and brain of the quadrotor system. It collates data from various sensors, sends commands to the motors and if there is a companion computer is attached collects and sends data to it. Commercial FCU's contain the various control systems and laws required for stable flight and movement. Most have an array of sensors built in.
- Sensors - These vary from from inertial, positioning, barometric and camera. Aside from inertial and barometric sensors that are present in most FCU's, sensors are chosen based on the environment and use case of the system.
- Companion computer - In some cases higher level processing is required by the system to execute autonomy and a secondary computer is used to do this.

- Transmitter and Receiver - This is used to implement manual control over the drone by a user.

Further delving into the sensors, we can classify UAV's based on their operating environment, indoors or outdoors. These give rise to two forms of localisation and navigation systems:

- Global Positioning Systems (GPS) - As the name suggests this setup uses GPS as well as other sensors.
- GPS-denied - These systems do not have access to GPS due to their operating environment.

In outdoor applications GPS provides a reliable and fairly accurate way to localise with use of several other sensors. However, indoor applications are denied the benefits of GPS and often must use other sensors for the task of localisation. Utilizing a similar concept of triangulation used by GPS a local positioning system(LPS) can be used for indoor environments. (Labs 2018) has developed a commercial system that utilizes Ultra-WideBand technology(UWB) with a bandwidth of $\approx 500MHz$.

With indoor environments users have more control of the environment so a LPS can create a feasible solution for indoor localisation for UAV's/robots operating there. The core idea of this research would be to integrate a commercial LPS directly into an existing FCU to produce accurate position estimates that can be used for autonomy. The measurements from the LPS would then be transformed into observations of the state of the UAV and fused with other observations from other sensors. This fused pose estimate would then be fed into the companion computer for off-board processing.

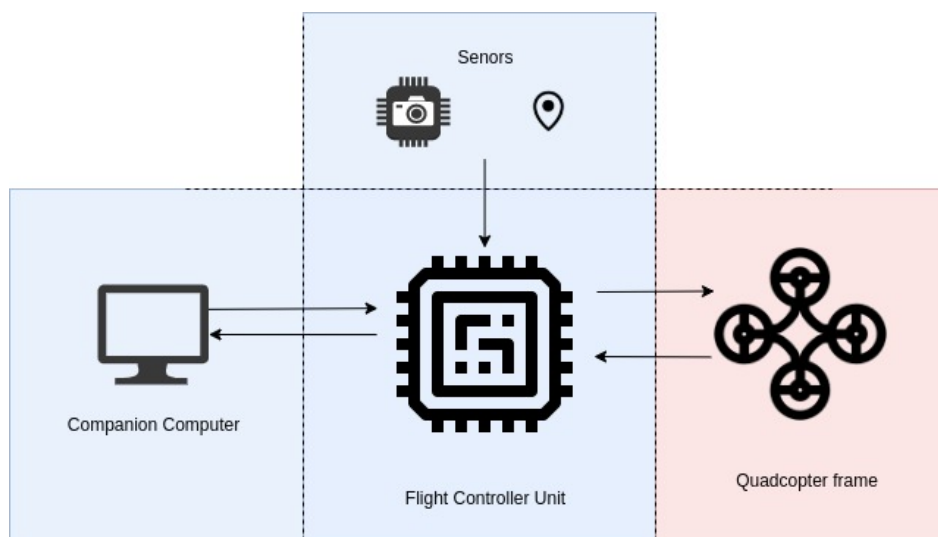


Figure 1.1: The typical setup for an autonomous UAV.

Figure: 1.1 shows a typical setup for UAV. Parts of the system highlighted in blue represent systems that would be worked on during the course of this research. The idea is that the system being designed should provide localisation data which should be independent of the rotor build. These will be further scoped in the upcoming sections but it will involve doing a quality exercise of the LPS to determine measurement uncertainty and limitations, writing additions or modifying the firmware of the FCU to integrate the LPS and setting up the pipelines for a companion computer to receive the pose estimates and use them.

AIMS & OBJECTIVES

In Chapter: 1 we briefly touched on what would be addressed over the course of this research. Expanding on that, the research would entail the use of the commercial version of an UWB sensor for positioning from Labs (2018). At a high level the project and be split into three modules that must be researched, unit tested and finally integrated. Figure 1.1 highlights the major systems within the project and are as follows:

- The Pozyx LPS providing measurements that will be used in localisation.
- A flight controller collating fusing various observations from sensors to provide a pose estimate.
- A companion computer to visualise and utilise the pose information in a meaningful manner.

From these systems and the overall aim of indoor localisation the following objectives were created:

- Evaluation and qualitative analysis of the LPS, documentation limitations from previous done work and current physical setups as well as compare with other ranging standards.
- Based on the qualitative analysis and experiments determine the best configuration in a household to place the anchors for the system.
- Use the incoming data from the sensors to produce a suitable measurement/observation model for the pose of the system.
- Relay the data to a flight controller unit via a suitable hardware interface.

- Delve into the firmware of the flight controller and apply sensor fusion algorithms on the flight controller to provide pose estimates.
- Pipe the pose estimates to a companion computer for visualisation and higher level control of a UAV.

All of these objectives can be completed without flying the UAV autonomously. Given the current situation and time-frame it was determined that setting up the pipelines to visualise the localisation in realtime from the companion computer is adequate for the last objective. Furthermore, with the autonomous flight being out of scope of this project much of the work fell into software engineering to achieve the overall aim. Broadly, this means delving into the software libraries and interfaces for the Pozyx sensor, modifying and making additions to the Ardupilot flight stack to integrate the Pozyx sensor with the (pixhawk?) FCU, and finally digging into the MAVLINK protocol and libraries to use the pose estimates on a Raspberry Pi 3 Model B+ PSoC. To achieve these objectives a solid software engineering aproach would need to be applied with familiarity of Python and C++ programming languages.

CHAPTER

3

BACKGROUND RESEARCH

APPENDIX



APPENDIX A

Begins an appendix

BIBLIOGRAPHY

Custers, B. (2016), Drones here, there and everywhere introduction and overview, *in* 'The Future of Drone Use', Springer, pp. 3–20.

Labs, P. (2018), 'Pozyx accurate positioning'.

Mendoza-Mendoza, J. A., Gonzalez-Villela, V., Sepulveda-Cervantes, G., Mendez-Martinez, M. & Sossa-Azuela, H. (2020), *Advanced Robotic Vehicles Programming*, Springer.

