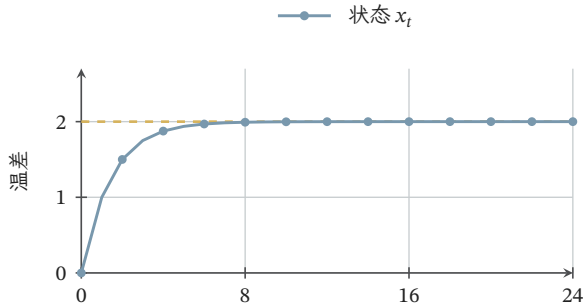
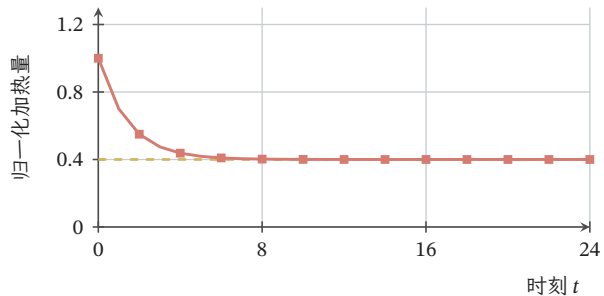
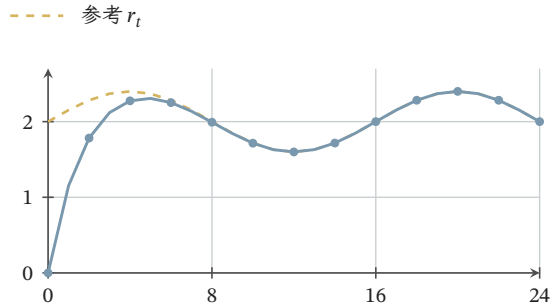
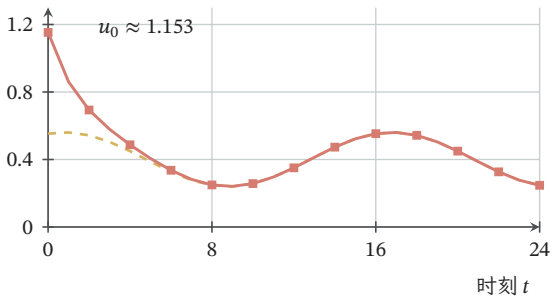


(a) 固定设定值

输入 u_t 

(b) 运动参考

前馈 u_t^r 

$x_0 = 0$, $e_t = -2(0.5)^t$; 无噪声、无输入幅值限制。