



Positive values favor measurement-aware fitting; negative values favor naïve fitting.


## A Improvement in $\theta$ RMSE

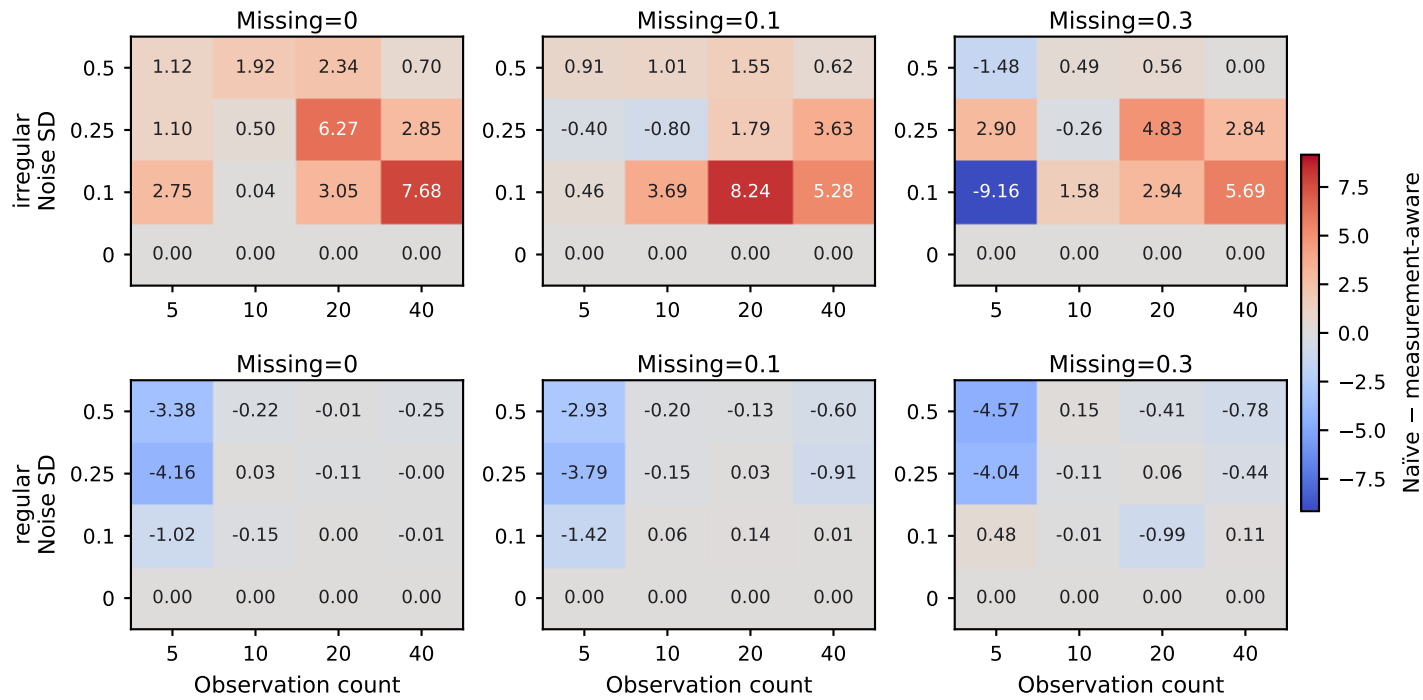

## B Improvement in $\sigma$ RMSE

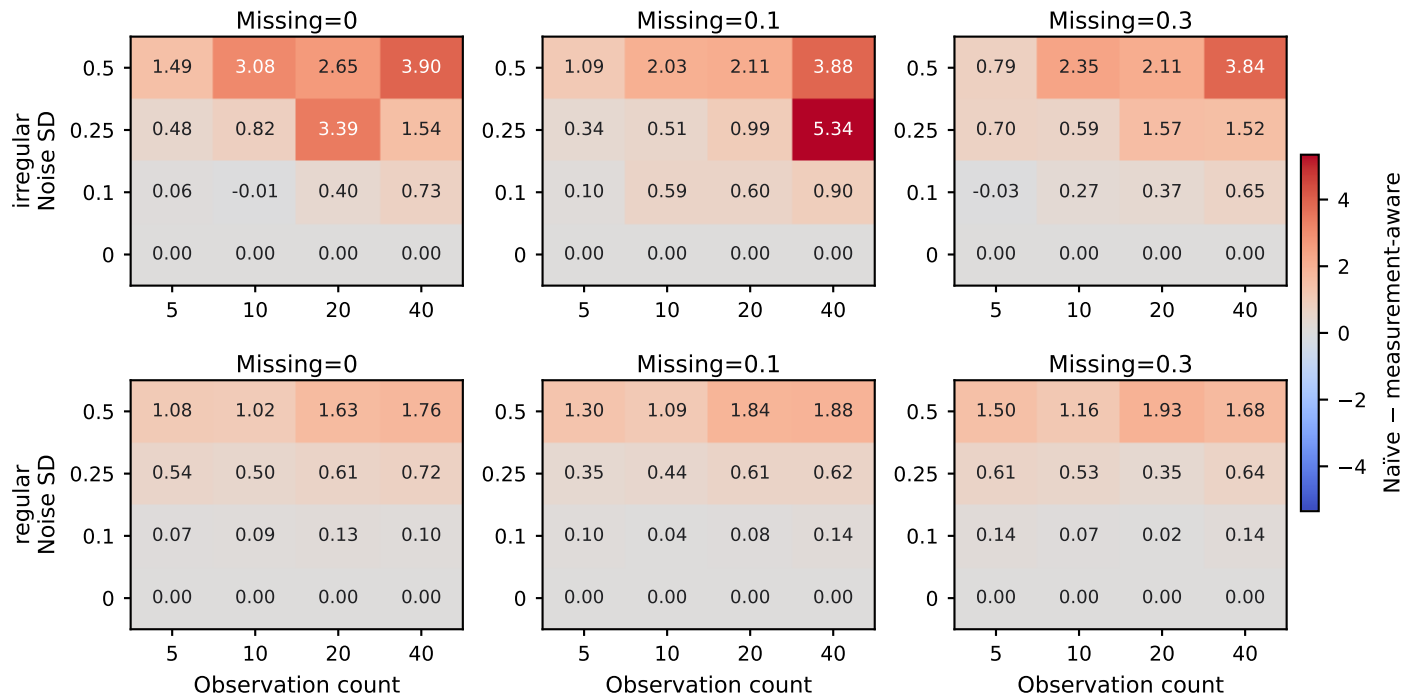


## C Reduction in $\theta$ boundary-hit frequency

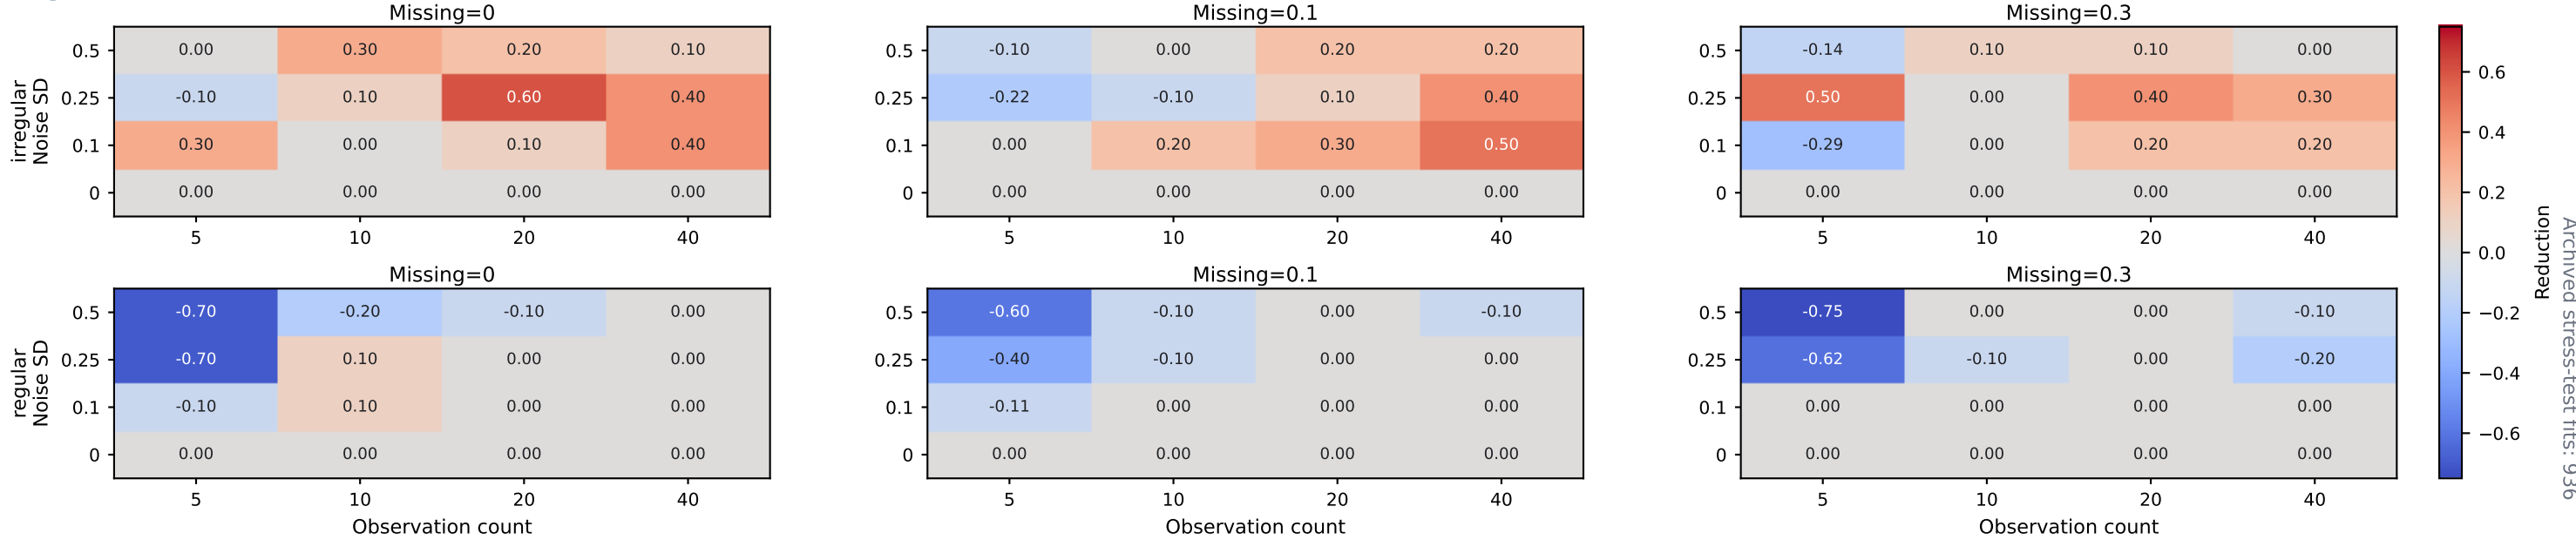


## D

### Condition-level $\theta$ RMSE

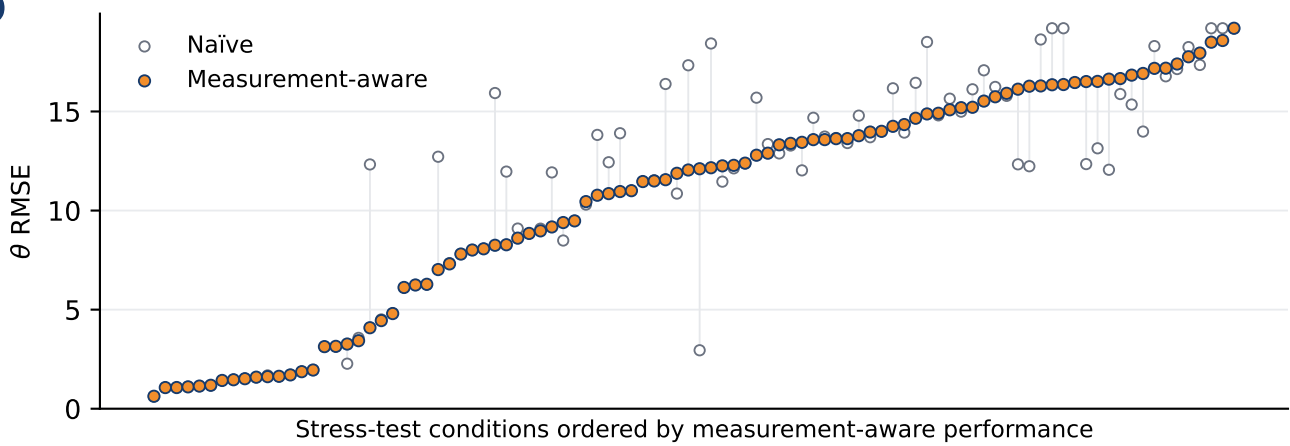

## E

### Condition-level $\sigma$ RMSE

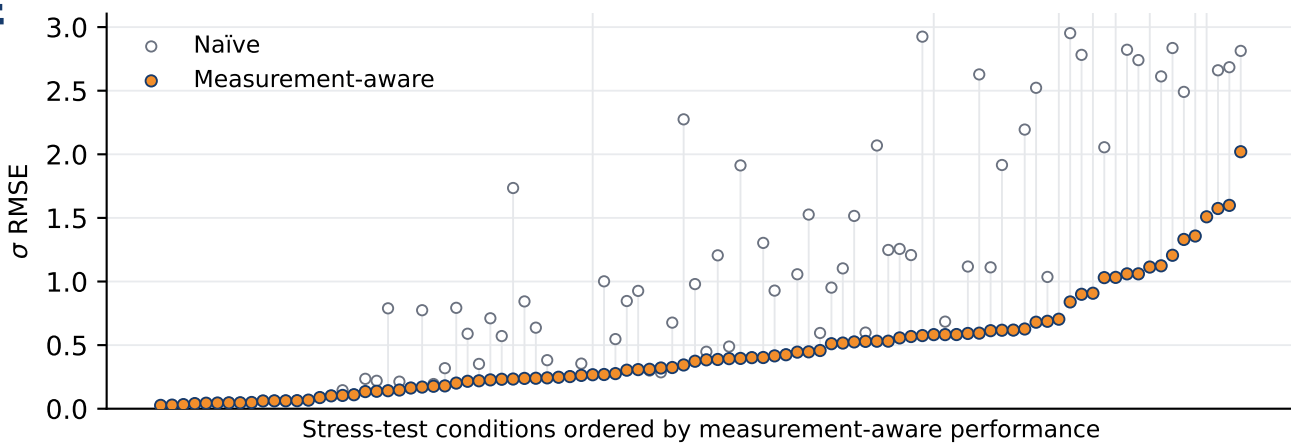

## F

### Overall robustness improvement

