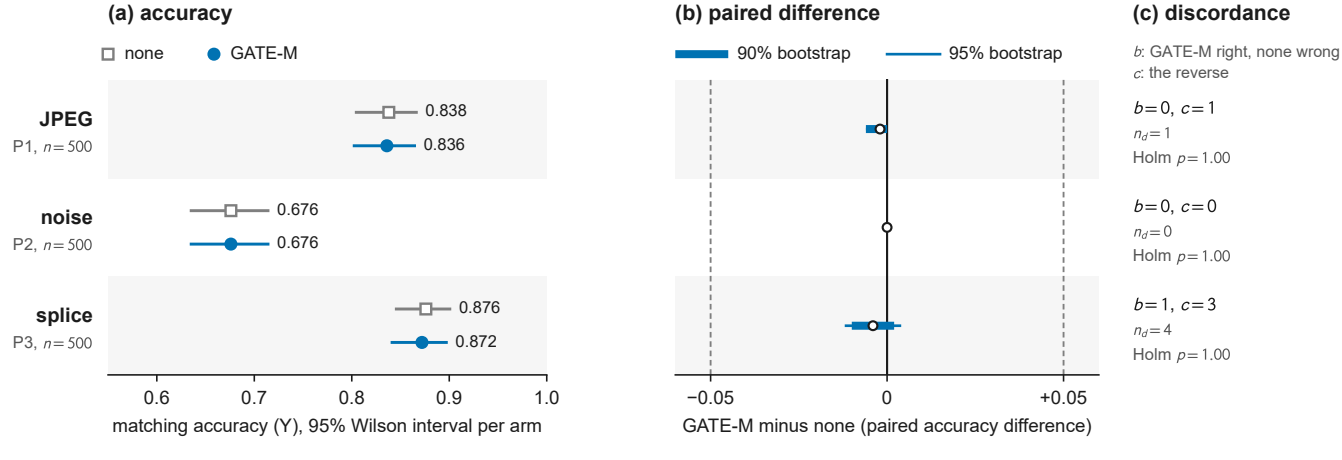

(a) accuracy
none
GATE-M
JPEG
P1, n = 500
0.838
0.836
noise
P2, n = 500
0.676
0.676
splice
P3, n = 500
0.876
0.872
0.6
0.7
0.8
0.9
1.0
matching accuracy (Y), 95% Wilson interval per arm
(b) paired difference
90% bootstrap
95% bootstrap
−0.05
0
+0.05
GATE-M minus none (paired accuracy difference)
(c) discordance
b: GATE-M right, none wrong
c: the reverse
b = 0, c = 1
n_d = 1
Holm p = 1.00
b = 0, c = 0
n_d = 0
Holm p = 1.00
b = 1, c = 3
n_d = 4
Holm p = 1.00