William Stallings Computer Organization and Architecture 10th Edition

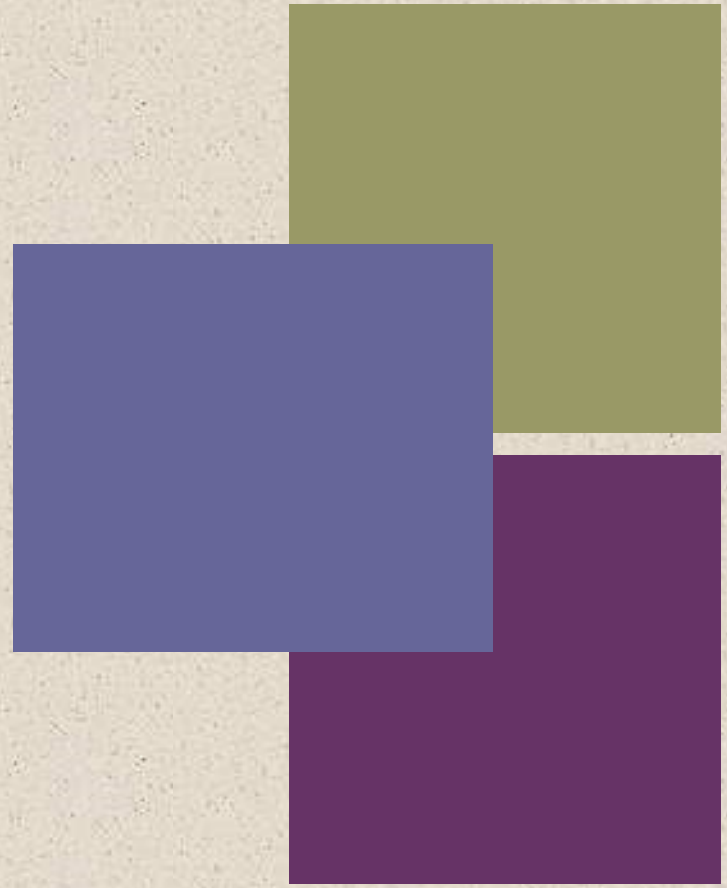

Chapter 4

Cache Memory

Location Internal (e.g. processor registers, cache, main memory) External (e.g. optical disks, magnetic disks, tapes) **Capacity** Number of words Number of bytes **Unit of Transfer** Word Block **Access Method** Sequential Direct Random Associative	**Performance** Access time Cycle time Transfer rate **Physical Type** Semiconductor Magnetic Optical Magneto-optical **Physical Characteristics** Volatile/nonvolatile Erasable/nonerasable **Organization** Memory modules

Table 4.1
Key Characteristics of Computer Memory Systems

Characteristics of Memory Systems

- Location
  - Refers to whether memory is internal and external to the computer
  - Internal memory is often equated with main memory
  - Processor requires its own local memory, in the form of registers
  - Cache is another form of internal memory
  - External memory consists of peripheral storage devices that are accessible to the processor via I/O controllers
- Capacity
  - Memory is typically expressed in terms of bytes
- Unit of transfer
  - For internal memory the unit of transfer is equal to the number of electrical lines into and out of the memory module

Method of Accessing Units of Data

Sequential access

- Memory is organized into units of data called records
- Access must be made in a specific linear sequence
- Access time is variable

Direct access

- Involves a shared read-write mechanism
- Individual blocks or records have a unique address based on physical location
- Access time is variable

Random access

- Each addressable location in memory has a unique, physically wired-in addressing mechanism
- The time to access a given location is independent of the sequence of prior accesses and is constant
- Any location can be selected at random and directly addressed and accessed
- Main memory and some cache systems are random access

Associative

- A word is retrieved based on a portion of its contents rather than its address
- Each location has its own addressing mechanism and retrieval time is constant independent of location or prior access patterns
- Cache memories may employ associative access

Capacity and Performance:

The two most important characteristics of memory

Three performance parameters are used:

Access time (latency)

- For random-access memory it is the time it takes to perform a read or write operation
- For non-random-access memory it is the time it takes to position the read-write mechanism at the desired location

Memory cycle time

- Access time plus any additional time required before second access can commence
- Additional time may be required for transients to die out on signal lines or to regenerate data if they are read destructively
- Concerned with the system bus, not the processor

Transfer rate

- The rate at which data can be transferred into or out of a memory unit
- For random-access memory it is equal to 1/(cycle time)

Memory

- The most common forms are:
  - Semiconductor memory
  - Magnetic surface memory
  - Optical
  - Magneto-optical
- Several physical characteristics of data storage are important:
  - Volatile memory
    - Information decays naturally or is lost when electrical power is switched off
  - Nonvolatile memory
    - Once recorded, information remains without deterioration until deliberately changed
    - No electrical power is needed to retain information
  - Magnetic-surface memories
    - Are nonvolatile
  - Semiconductor memory
    - May be either volatile or nonvolatile
  - Nonerasable memory
    - Cannot be altered, except by destroying the storage unit
    - Semiconductor memory of this type is known as read-only memory (ROM)
- For random-access memory the organization is a key design issue
  - Organization refers to the physical arrangement of bits to form words

Memory Hierarchy

- Design constraints on a computer's memory can be summed up by three questions:
  - How much, how fast, how expensive
- There is a trade-off among capacity, access time, and cost
  - Faster access time, greater cost per bit
  - Greater capacity, smaller cost per bit
  - Greater capacity, slower access time
- The way out of the memory dilemma is not to rely on a single memory component or technology, but to employ a memory hierarchy

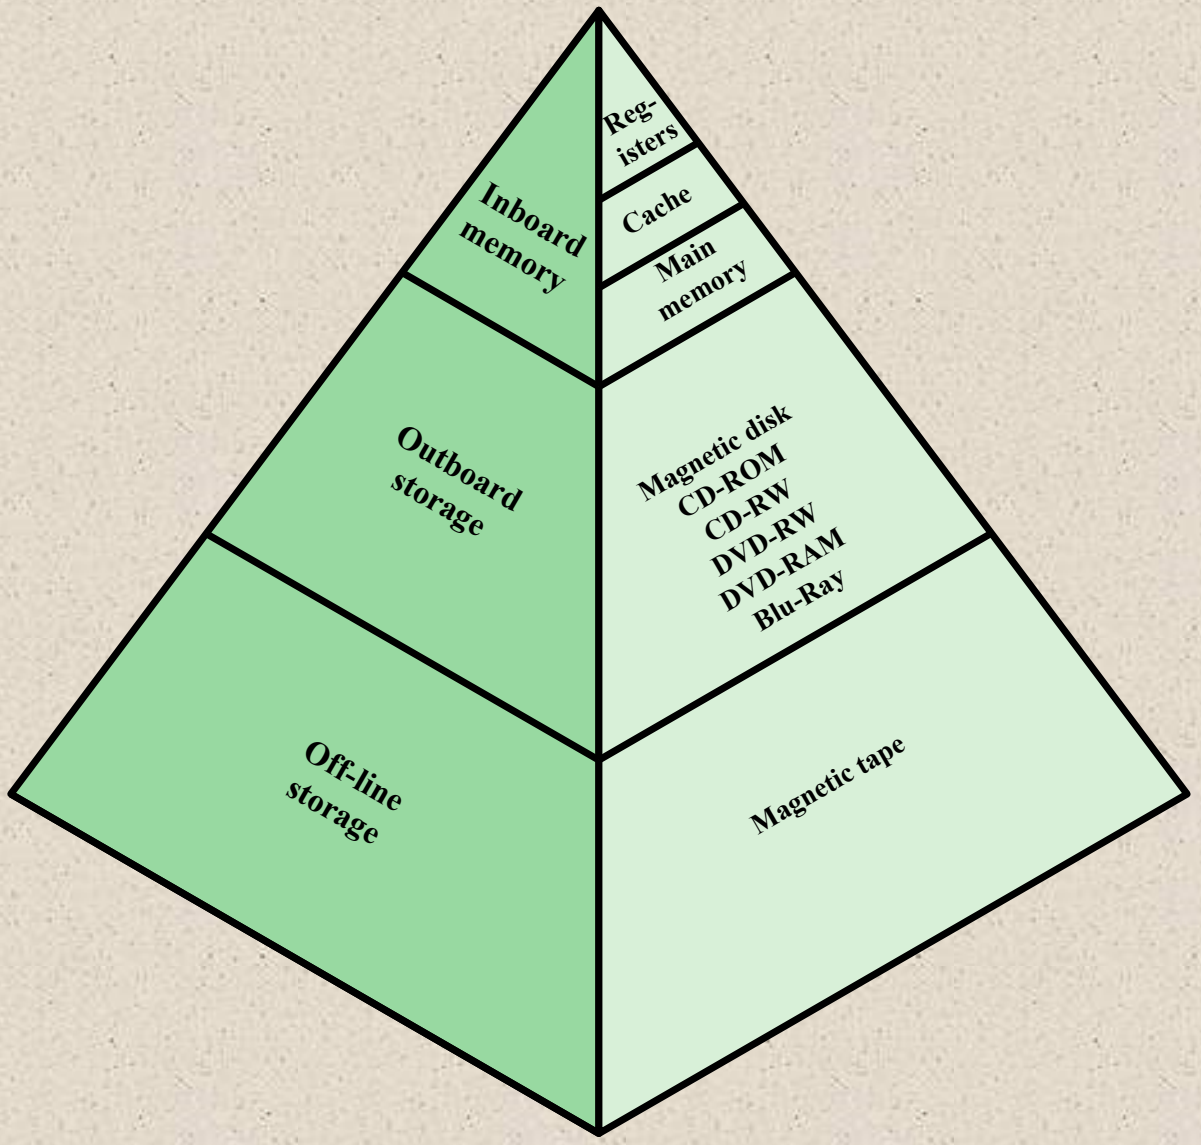

Figure 4.1 The Memory Hierarchy

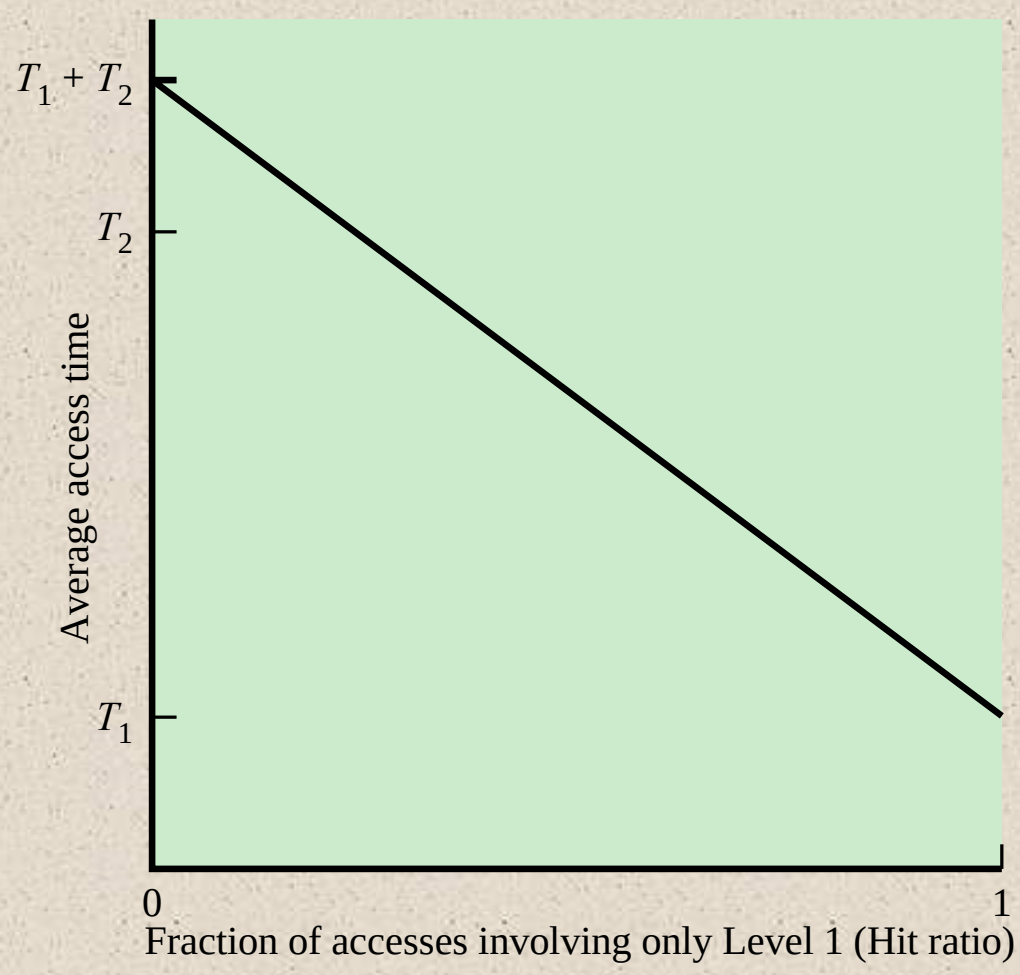

Figure 4.2 Performance of a Simple Two-Level Memory

Memory

- The use of three levels exploits the fact that semiconductor memory comes in a variety of types which differ in speed and cost
- Data are stored more permanently on external mass storage devices
- External, nonvolatile memory is also referred to as **secondary** memory or **auxiliary** memory
- Disk cache
  - A portion of main memory can be used as a buffer to hold data temporarily that is to be read out to disk
  - A few large transfers of data can be used instead of many small transfers of data
  - Data can be retrieved rapidly from the software cache rather than slowly from the disk

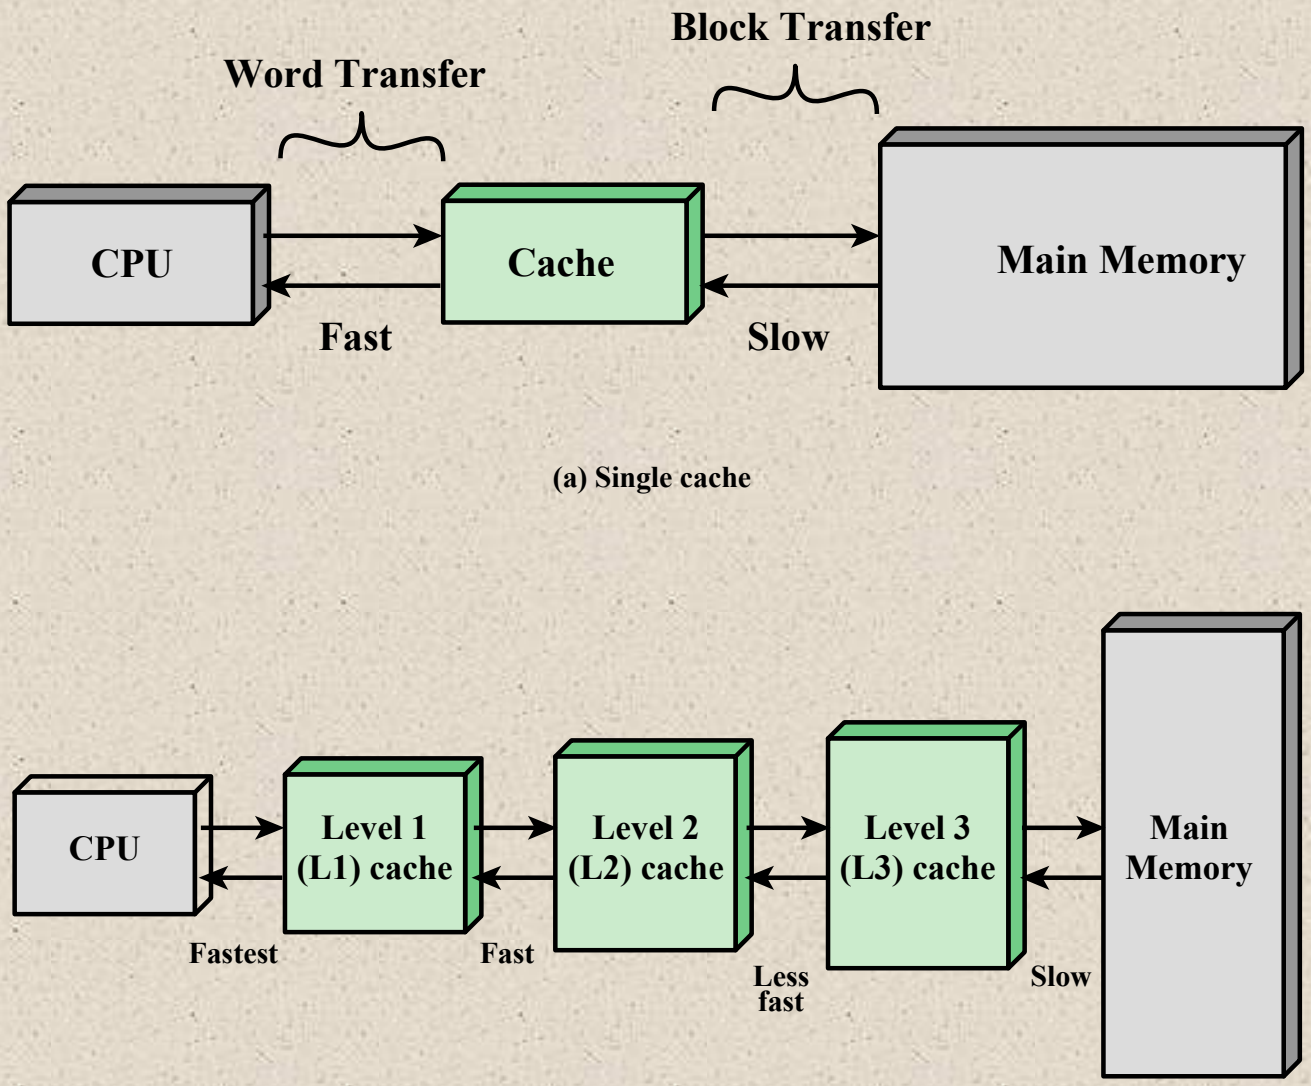

Figure 4.3 Cache and Main Memory